



Features

- Both the DTA114E and DTC114E transistor in SOT-363 Package
- Transistor elements are independent, eliminating interference
- Mounting cost and area can be cut in half



Mechanical Data

- Case: SOT-363
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208

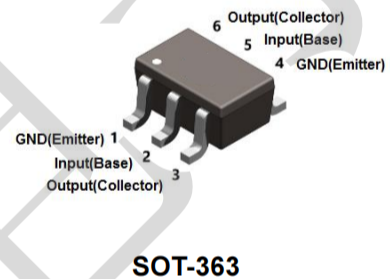

Ordering Information

Part Number	Package	Shipping Quantity
UMD3N	SOT-363	3000 pcs / Tape & Reel

Maximum Ratings (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value		Unit
		TR1	TR2	
Supply Voltage	V_{CC}	50	-50	V
Input Voltage	V_I	-10 to +40	10 ~ -40	V
Output Current	I_O	50	-50	mA
Collector Current	$I_{C(\text{Max})}$	100	-100	mA

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation	P_D	150	mW
Thermal Resistance Junction-to-Air *1	$R_{\theta JA}$	495	$^\circ\text{C/W}$
Thermal Resistance Junction-to-Case *1	$R_{\theta JC}$	296	$^\circ\text{C/W}$
Thermal Resistance Junction-to-Lead *1	$R_{\theta JL}$	357	$^\circ\text{C/W}$
Operating Junction Temperature Range	T_J	-55 ~ +150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 ~ +150	$^\circ\text{C}$

Note 1: The data tested by surface mounted on a 15mm * 15mm * 1mm FR4-epoxy P.C.B

Electrical Characteristics-DTr1 (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input Voltage	$V_{I(OFF)}$	$V_{CC} = 5V, I_O = 100\mu A$	0.5	-	-	V
Input Voltage	$V_{I(ON)}$	$V_O = 0.3V, I_O = 10mA$	-	-	3	V
Output Voltage	$V_{O(on)}$	$I_O = 10mA, I_I = 0.5mA$	-	-	0.3	V
Input Current	I_I	$V_I = 5V$	-	-	0.88	mA
Output Current	$I_{O(off)}$	$V_{CC} = 50V, V_I = 0V$	-	-	0.5	μA
DC Current Gain	G_I	$V_O = 5V, I_O = 5mA$	30	-	-	-
Input Resistor	$R_1(R_2)$		7	10	13	k Ω
Resistance ratio	R_2/R_1		0.8	1	1.2	-
Gain-Bandwidth Product	f_T	$V_{CE} = 10V, I_E = 5mA$ $f = 100MHz$	-	250	-	MHz

Electrical Characteristics-DTr2 (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input Voltage	$V_{I(OFF)}$	$V_{CC} = -5V, I_O = -100\mu A$	-0.5	-	-	V
Input Voltage	$V_{I(ON)}$	$V_O = -0.3V, I_O = -10mA$	-	-	-3	V
Output Voltage	$V_{O(on)}$	$I_O = -10mA, I_I = -0.5mA$	-	-	-0.3	V
Input Current	I_I	$V_I = -5V$	-	-	-0.88	mA
Output Current	$I_{O(off)}$	$V_{CC} = -50V, V_I = 0V$	-	-	-0.5	μA
DC Current Gain	G_I	$V_O = -5V, I_O = -5mA$	30	-	-	-
Input Resistor	$R_1(R_2)$		7	10	13	k Ω
Resistance ratio	R_2/R_1		0.8	1	1.2	-
Gain-Bandwidth Product	f_T	$V_{CE} = -10V, I_E = -5mA$ $f = 100MHz$	-	250	-	MHz

Ratings and Characteristic Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

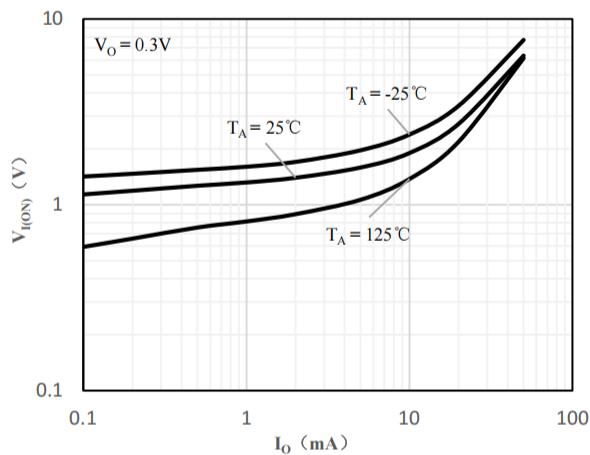


Fig 1 Input Voltage vs Output Current

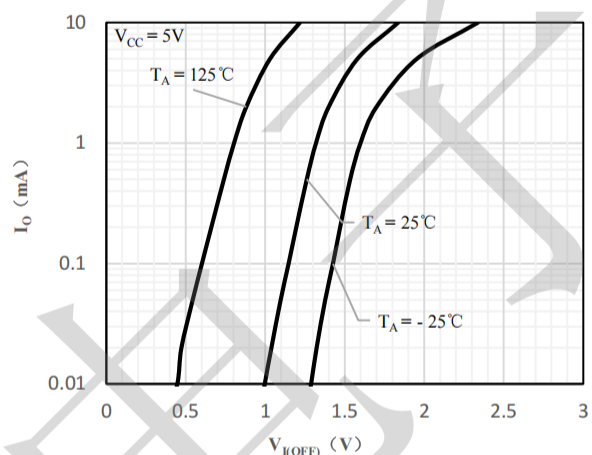


Fig 2 Output Current vs Input Voltage

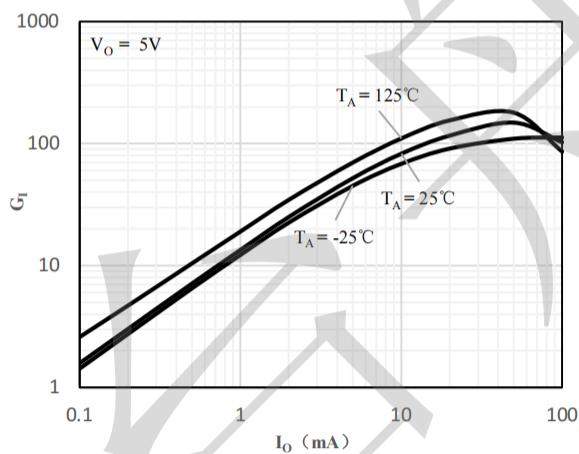


Fig 3 DC Current Gain vs Output Current

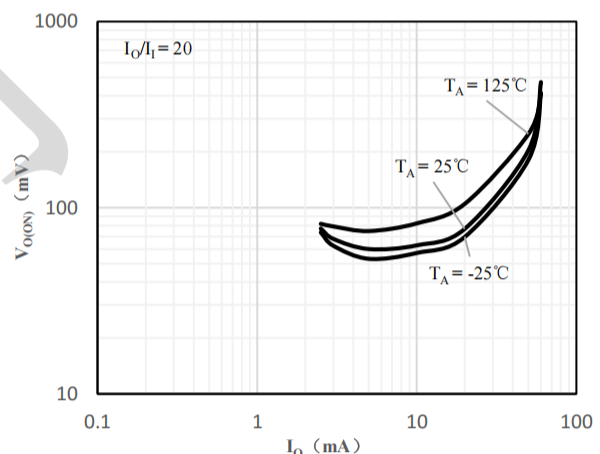


Fig 4 Output Voltage vs Output Current

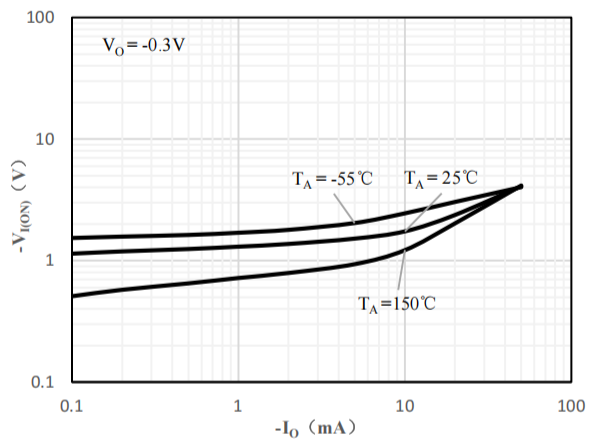


Fig 1 Input Voltage vs Output Current

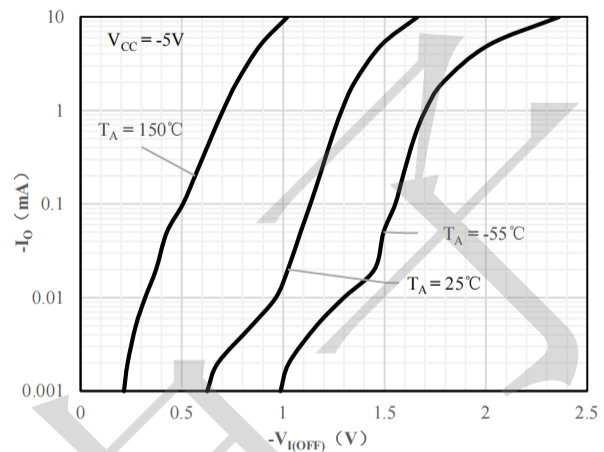


Fig 2 Output Current vs Input Voltage

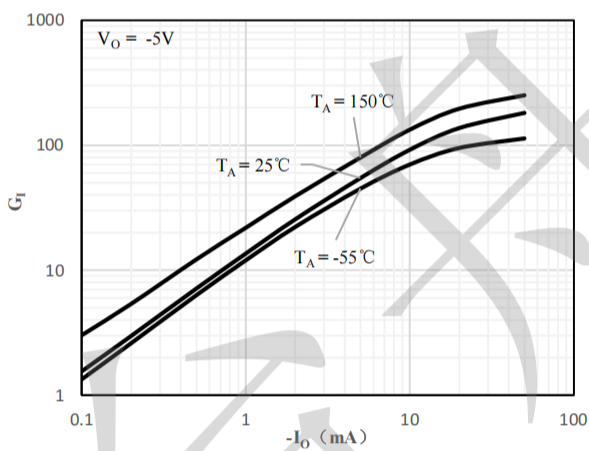


Fig 3 DC Current Gain vs Output Current


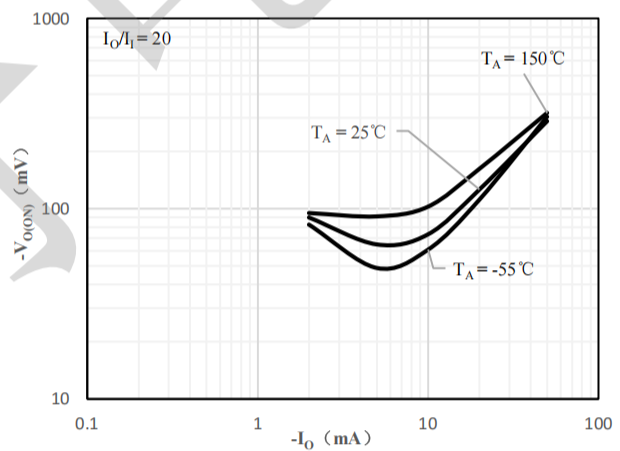


Fig 4 Output Voltage vs Output Current

Package Outline Dimensions (unit:mm)

SOT-363

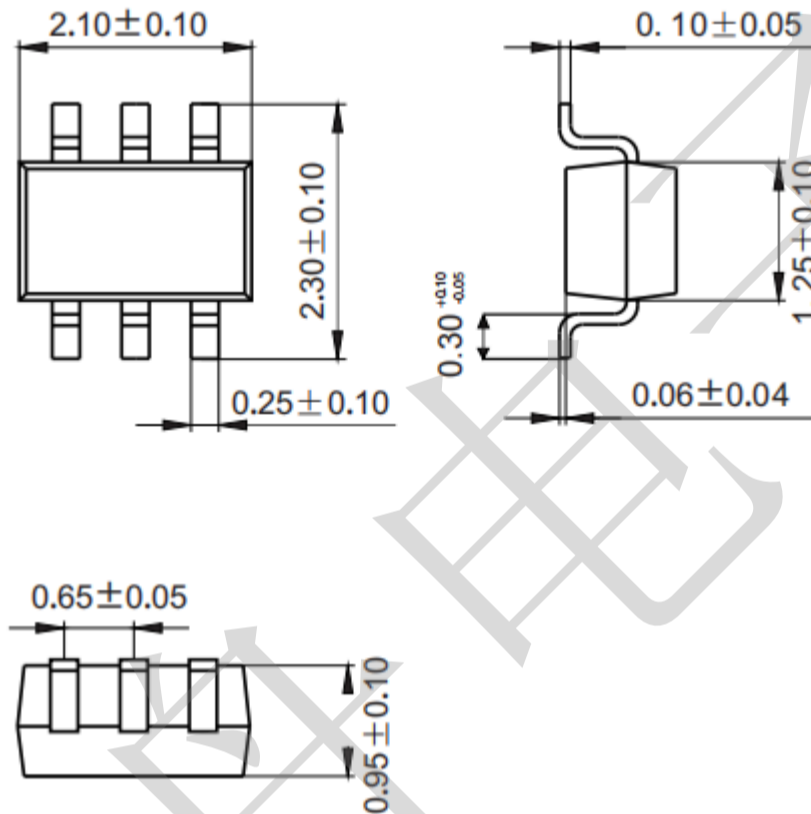

Mounting Pad Layout (unit: mm)

