



P-Channel Enhancement Mode Field Effect Transistor



SOT-323

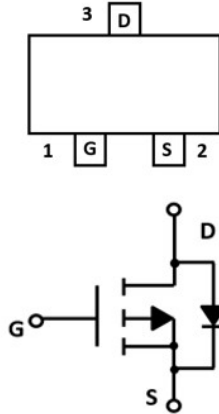

Product Summary

- V_{DS} -60 V
- I_D -0.17 A
- $R_{DS(ON)}$ (at $V_{GS}=-10V$) <8 ohm
- $R_{DS(ON)}$ (at $V_{GS}=-4.5V$) <9.9 ohm

General Description

- Trench Power LV MOSFET technology
- Low $R_{DS(ON)}$
- Low Gate Charge

Applications

- Video monitor
- Power management

■ Absolute Maximum Ratings ($T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter		Symbol	Maximum	Unit
Drain-source Voltage		V_{DS}	-60	V
Gate-source Voltage		V_{GS}	± 20	V
Drain Current	$T_A=25^\circ\text{C}$ @ Steady State	I_D	-0.17	A
	$T_A=70^\circ\text{C}$ @ Steady State		-0.14	
Pulsed Drain Current ^A		I_{DM}	0.68	A
Total Power Dissipation @ $T_A=25^\circ\text{C}$		P_D	0.15	W
Thermal Resistance Junction-to-Ambient ^B		$R_{\theta JA}$	833	$^\circ\text{C}/\text{W}$
Junction and Storage Temperature Range		T_J, T_{STG}	-55~+150	$^\circ\text{C}$

■ Ordering Information (Example)

PREFERRED P/N	PACKING CODE	Marking	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
BSS84W	F2	B84.	3000	30000	120000	7" reel



BSS84W

■ Electrical Characteristics (T_J=25℃ unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Static Parameter						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} = 0V, I _D =-250μA	-60			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =-60V, V _{GS} =0V			-1	μA
Gate-Body Leakage Current	I _{GSS}	V _{GS} = ±20V, V _{DS} =0V			±100	nA
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D =-250μA	-0.9	-1.4	-2.0	V
Static Drain-Source On-Resistance	R _{DS(ON)}	V _{GS} = -10V, I _D =-0.15A		3.3	8	Ω
		V _{GS} = -4.5V, I _D =-0.15A		3.5	9.9	
Diode Forward Voltage	V _{SD}	I _S =-0.17A, V _{GS} =0V			-1.2	V
Maximum Body-Diode Continuous Current	I _S				-0.17	A
Dynamic Parameters						
Input Capacitance	C _{iss}	V _{DS} =-30V, V _{GS} =0V, f=1MHZ		43		pF
Output Capacitance	C _{oss}			2.9		
Reverse Transfer Capacitance	C _{rss}			1.8		
Switching Parameters						
Total Gate Charge	Q _g	V _{GS} =-10V, V _{DS} =-30V, I _D =-0.15 A		1.77		nC
Gate Source Charge	Q _{gs}			0.57		
Gate Drain Charge	Q _{gd}			0.18		
Reverse Recovery Charge	Q _{rr}	IF=-0.15A, di/dt=100A/μs		13		
Reverse Recovery Time	t _{rr}			23		
Turn-on Delay Time	t _{D(on)}	V _{GS} =-4.5V, V _{DD} =-30V, I _D =-0.15A, R _{GEN} =2.5Ω		8.6		ns
Turn-on Rise Time	t _r			20		
Turn-off Delay Time	t _{D(off)}			15		
Turn-off Fall Time	t _f			77		

A. Pulse Test: Pulse Width≤10us, Duty cycle ≤2%.

B. Device mounted on FR-4 PCB, 1 inch x 0.85 inch x 0.062 inch.



■ Typical Performance Characteristics

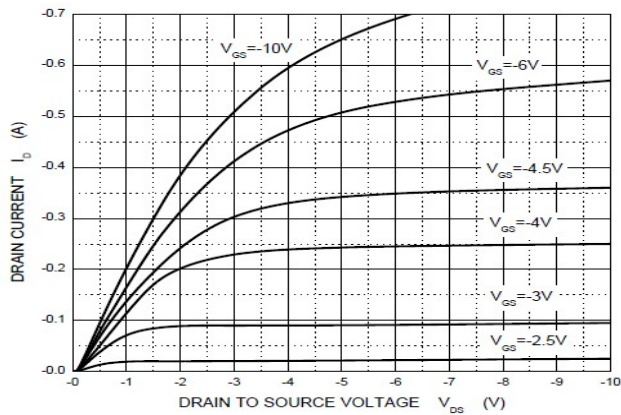


Figure1. Output Characteristics

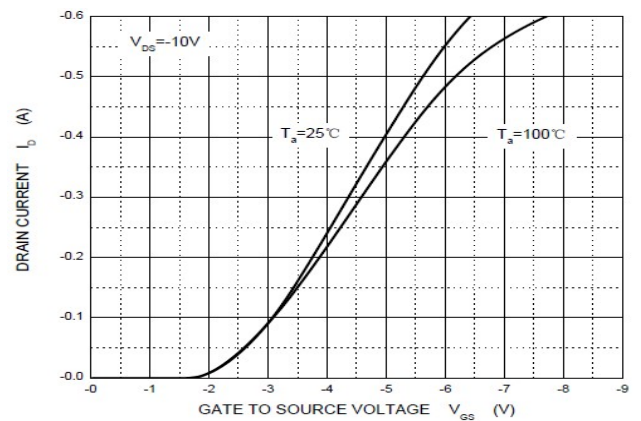


Figure2. Transfer Characteristics

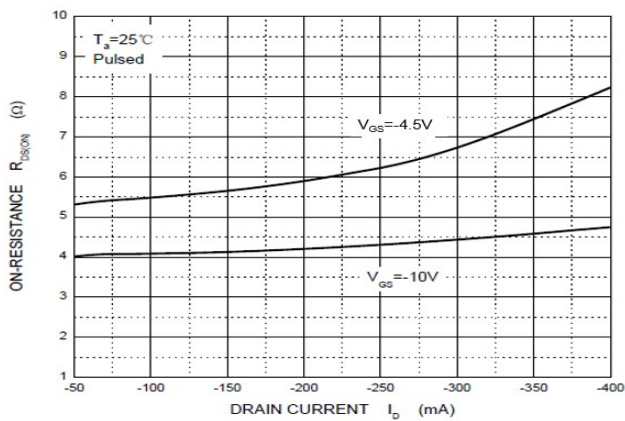


Figure3. Drain-Source on Resistance

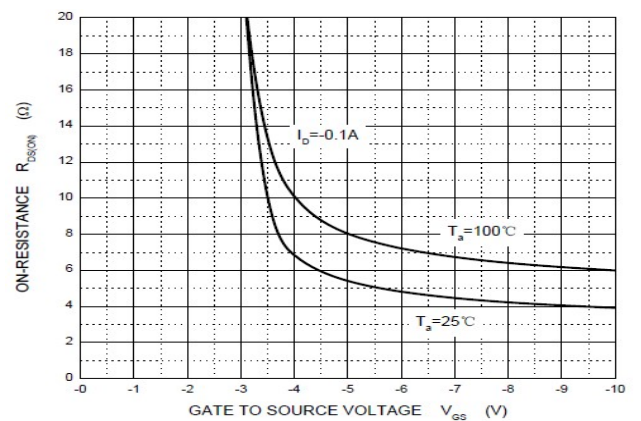


Figure4. Drain-Source on Resistance

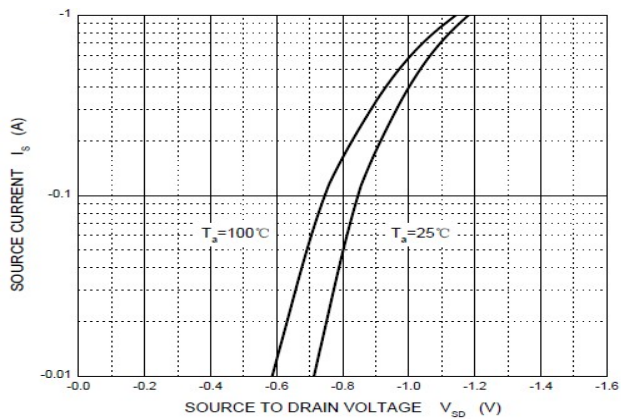


Figure5. Diode Forward Voltage vs. current



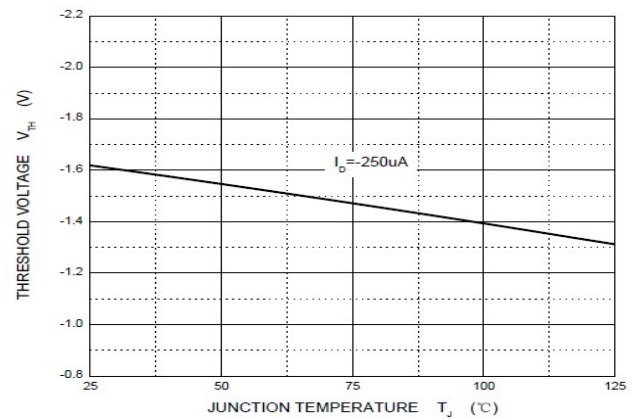


Figure6. Gate Threshold vs. Junction Temperature


■ SOT-323 Package information




TOP VIEW



SIDE VIEW



SIDE VIEW



SUGGESTED SOLDER PAD LAYOUT

SYMBOL	DIMENSIONS					
	INCHES			Millimeter		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	0.035	---	0.043	0.900	---	1.100
A1	0.000	---	0.004	0.000	---	0.100
A2	0.035	0.037	0.039	0.900	0.950	1.000
b	0.006	0.010	0.014	0.150	0.250	0.350
c	0.004	---	0.010	0.100	---	0.250
D	0.071	0.079	0.087	1.800	2.000	2.200
E	0.045	0.049	0.053	1.150	1.250	1.350
E1	0.085	0.091	0.096	2.150	2.300	2.450
e	0.026 TYP			0.650 TYP		
e1	0.047	0.051	0.055	1.200	1.300	1.400
L	0.021 REF			0.525 REF		
L1	0.010	0.014	0.018	0.260	0.360	0.460
θ	0°	---	8°	0°	---	8°

NOTE:

1. PACKAGE BODY SIZES EXCLUDE MOLD FLASH AND GATE BURRS.
2. TOLERANCE 0.1mm UNLESS OTHERWISE SPECIFIED.
3. THE PAD LAYOUT IS FOR REFERENCE PURPOSES ONLY.



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.