


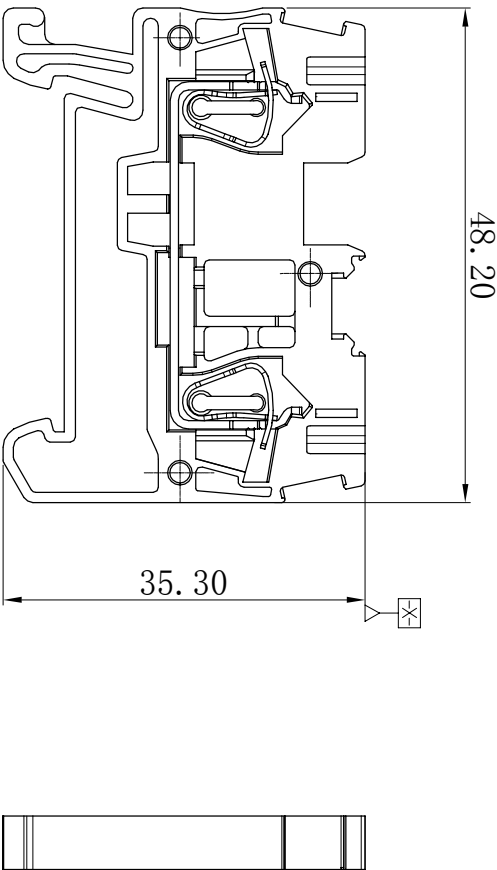

Use group	B	C	D
Rated voltage(V)	600	600	
Rated current(A)	20	20	

Wire range(Solid/Stranded)	0.2-2.5mm ³
Solid	0.2-4mm ²
Stranded	0.2-2.5mm ²
Stranded with ferrules without plastic sleeve	0.2-2.5mm ²
Stranded with ferrules with plastic sleeve	0.2-2.5mm ²

Surge voltage category	III
Pollution degree	3
Rated surge voltage(kV)	8
Rated voltage(V)	800
Rated current(A)	24

Insulator	PA66	UL94 V-0
Conductor	Copper alloy	Sn plated
Spring	Stainless steel	

1. Dimension shall be interpreted per
ASME Y14.5-2009

Pitch Range in mm	Nominal Dimension Range				— □	
	Over mm	Over In	Over mm	Over mm		
6	10	30	60	100	0.1/10	
TO	TO	TO	TO	TO		
6	24	30	60	100	150	<
TO	TO	TO	TO	TO	TO	

SUPU 宁波盛普电子有限公司
NINGBO SUPU ELECTRONICS CO.,LTD.