



FRED Modules

V_{RRM} 400V

I_{FAV} 400 A


Applications

- Inversion Welder
- Uninterruptible Power Supply (UPS)
- Plating Power Supply
- Ultrasonic Cleaner and Welder
- Power Factor Correction (PFC) Circuit
- Converter & Chopper

Features

- Soft Reverse Recovery Characteristics
- Ultrafast Reverse Recovery Time
- Low Reverse Recovery Loss
- Low Forward Voltage
- High Surge Current Capability
- Low Inductance Package

Circuit

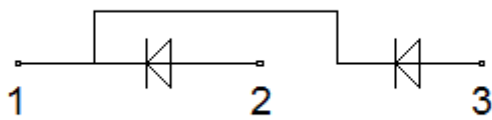

Maximum Ratings

Symbol	Conditions	Values	Units
V _R		400	V
V _{RRM}		400	V
I _{F(AV)}	T _C =80°C, Per Diode	400	A
I _{F(RMS)}	T _C =80°C, Per Diode	560	A
I _{FSM}	1/2 Cycle, 50Hz, Sine	2800	A
	1/2 Cycle, 60Hz, Sine	3080	A
I ² t	T _J =25°C, t=10ms, 50Hz, Sine	39200	A ² s
	T _J =25°C, t=8.3ms, 60Hz, Sine	39200	A ² s
P _D		1250	W
Visol	AC, Ton=1min	3000	V
T _J		-40 to +150	°C
T _{STG}		-40 to +125	°C
Torque	Recommended (M6)	5±15%	N·m
Torque	Recommended (M6)	5±15%	N·m
Weight		160	g

Thermal Characteristics

Symbol	Conditions	Values	Units
R _{th(j-c)}	Per Diode	0.1	°C/W
R _{th(j-c)}	Per Module	0.05	°C/W



Electrical Characteristics

Symbol	Conditions	Values			Units
		Min.	Typ.	Max.	
I_{RM}	$V_R=400V$	--	--	0.5	mA
	$V_R=400V, T_J=125^{\circ}C$	--	--	5	mA
V_F	$I_F=400A$	--	1.5	--	V
	$I_F=400A, T_J=125^{\circ}C$	--	1.25	--	V
trr	$I_F=1A, V_R=30V, di_F/dt=-200A/\mu s$	--	55	--	ns
trr	$V_R=200V, I_F=400A, di_F/dt=-200A/\mu s, T_J=25^{\circ}C$	--	145	--	ns
I_{RRM}		--	17	--	A
trr	$V_R=200V, I_F=400A, di_F/dt=-200A/\mu s, T_J=125^{\circ}C$	--	240	--	ns
I_{RRM}		--	30	--	A

Performance Curves

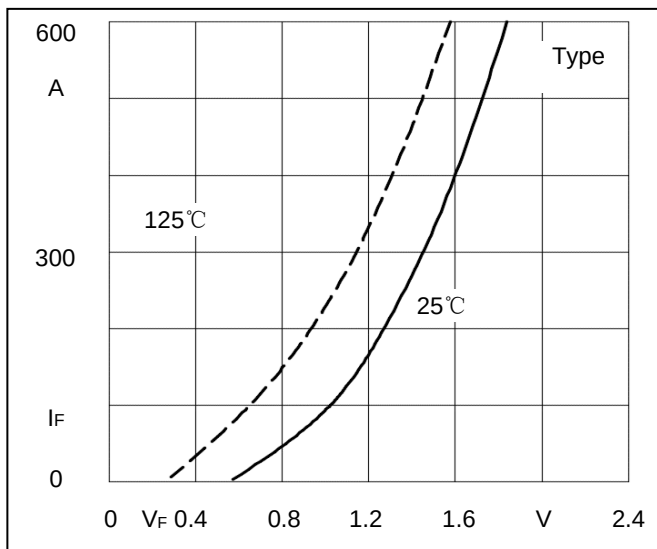


Fig1. Forward Voltage Drop vs Forward Current

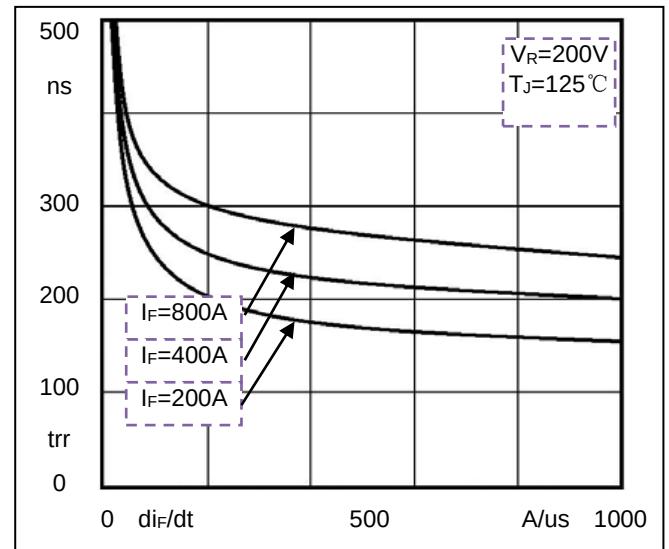


Fig2. Reverse Recovery Time vs di_F/dt

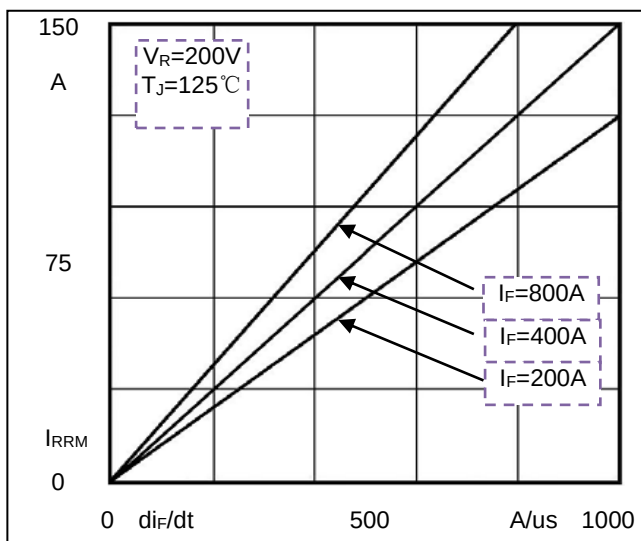


Fig3. Reverse Recovery Current vs di_F/dt


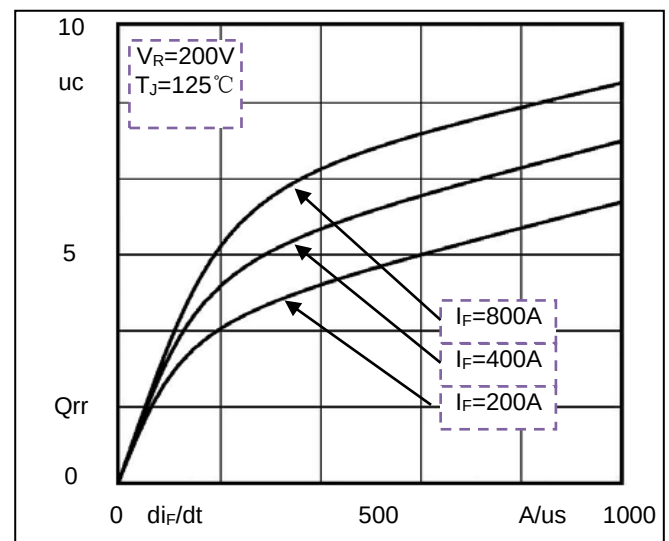


Fig4. Reverse Recovery Charge vs di_F/dt

Package Outline Information

CASE: F2

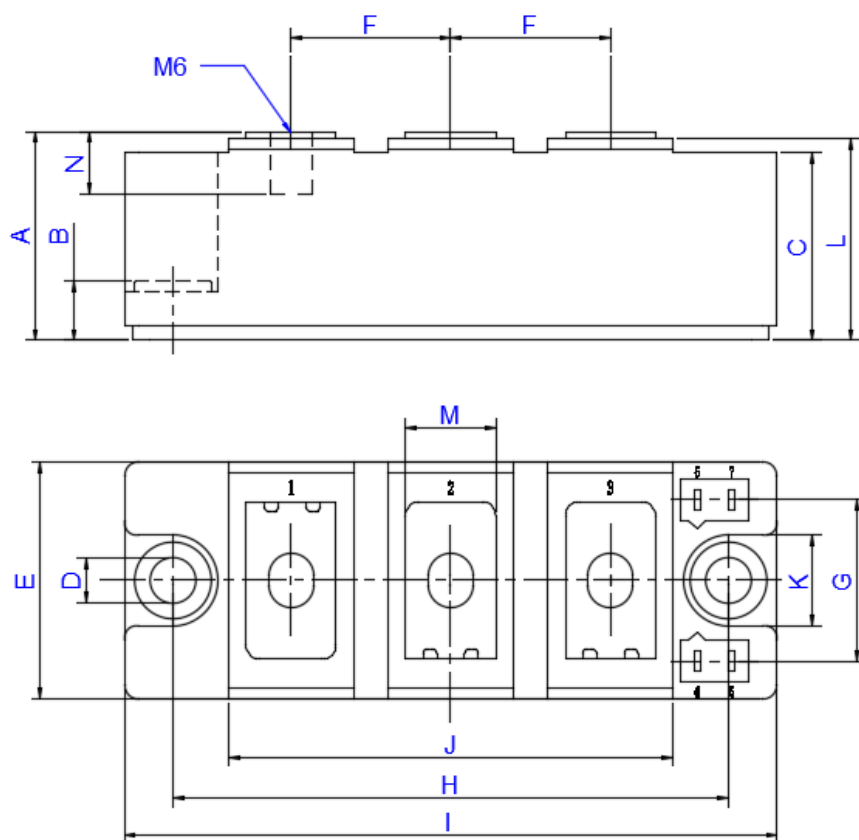

DIM	Min (mm)	Max (mm)	Note
A	29.5	30.5	
B	8	9	
C	26.5	27.5	
D	6.2	6.8	Ø
E	33.5	34.5	
F	22.5	23.5	
G	22.9	23.5	
H	79.5	80.5	
I	93.5	94.5	
J	63.5	64.5	
K	12.5	13.5	
L	28.5	29.5	
M	12.9	13.1	
N	8.5	9	

Dimensions in mm