
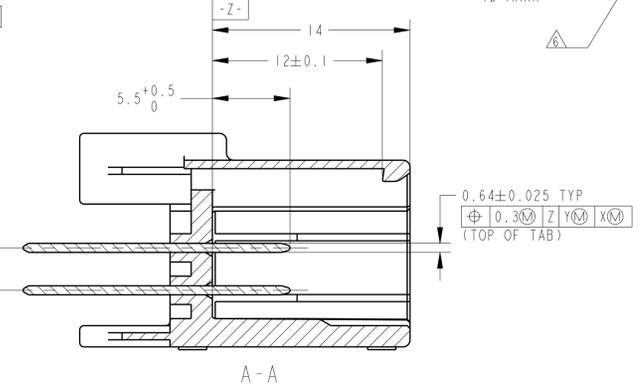
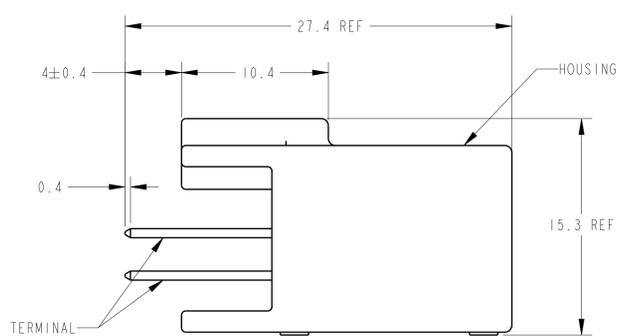
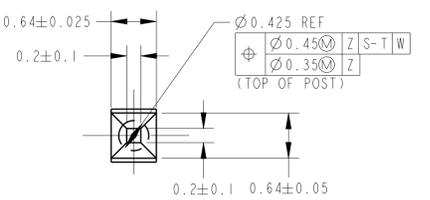
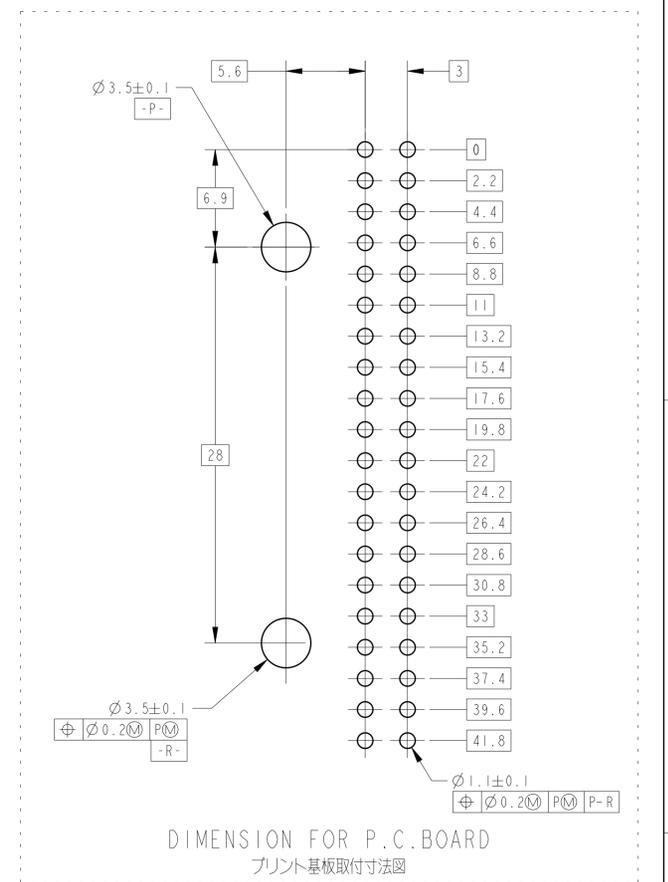
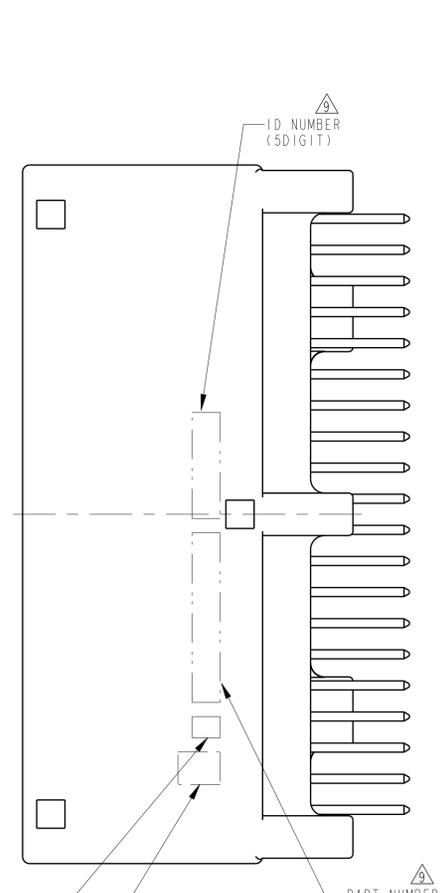
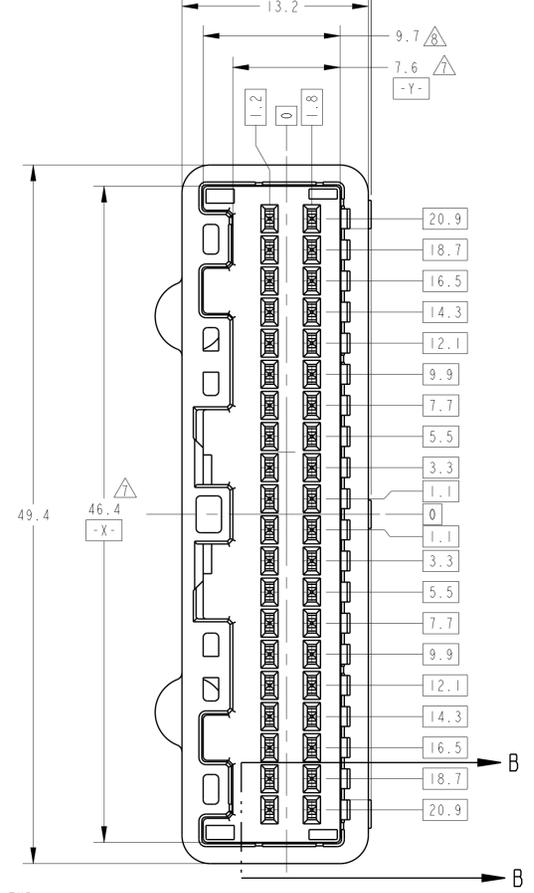
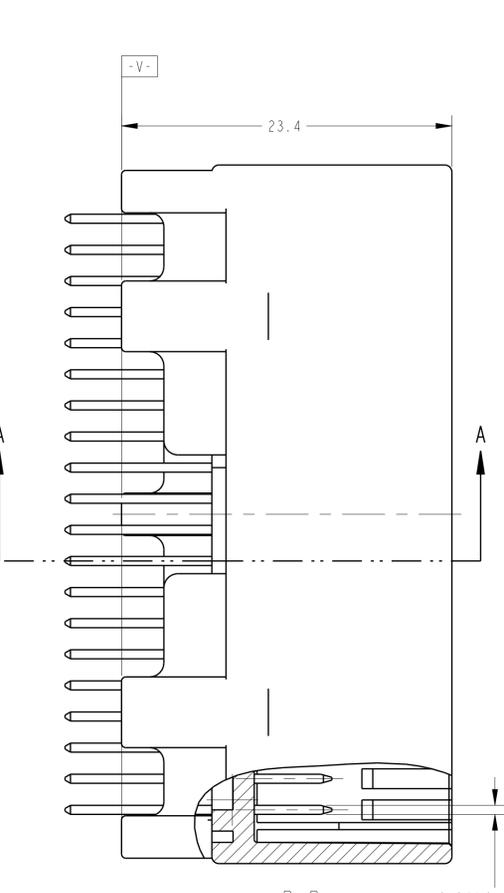


REVISONS		DATE	OWN	APVD
C3	REVISED PER ECO-11-005140	09APR11	RK	HMR
C4	REVISED PER ECO-15-012539	25AUG15	TM	KK

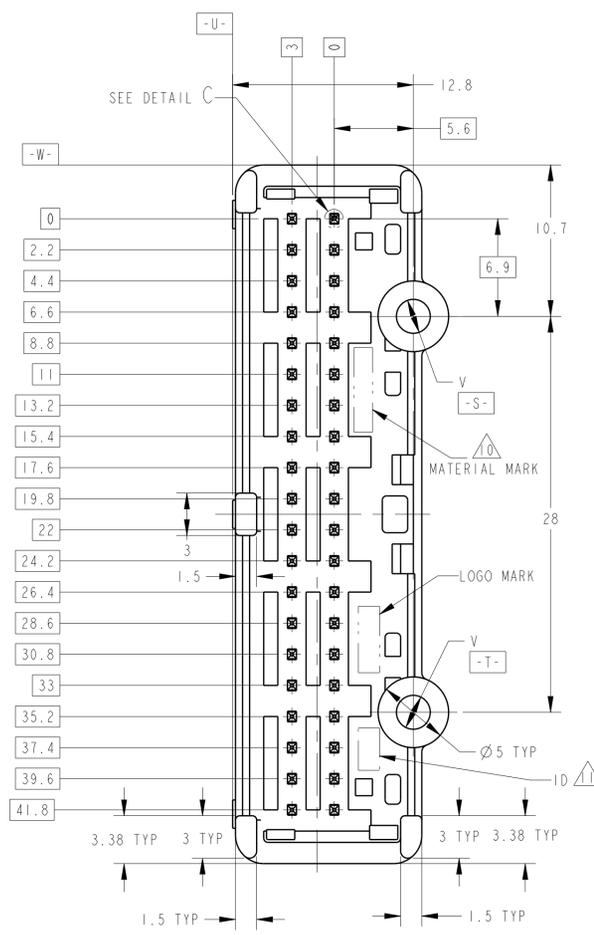

1. 適合相手ハウジング番号は、TABLE-1参照。
プラグハウジングアセンブリと支障なく取合すること。
 2. 推奨取付ねじ：JIS B1115, B1122 タッピングねじ
なべ2種、厚み径3、長さ：TABLE-3 参照
 3. ねじ締めトルク：0.392N・m 最大
 4. 取扱説明書No：411-5928
 5. 適用メス線径はTABLE-2 参照
- △. コンタクト仕上識別記号：表参照。
△. [-Z-] 面から6mmの範囲で測定。
△. [-Z-] 面から2mmの範囲で測定。
△. 型番1376113-8, -9, 1-1, 1-3, 1-5にのみ印字される。
△. 材料マーク
△. 1-1376113-3のみ
1. MATING CONNECTOR PART NUMBER; SEE TABLE-1.
TO BE MATED SMOOTHLY WITH THE PLUG HOUSING ASSEMBLY.
 2. RECOMMENDED SCREW: PAN-HEADED.
TYPE 2 TAPPING SCREW OF DIA 3mm LENGTH: SEE TABLE-3
REFER TO JIS B1115, B1122
 3. FASTENING TORQUE FOR SCREW: 0.392N
 4. INSTRUCTION SHEET NO: 411-5928
 5. APPLIED TERMINAL: SEE TABLE-2.
- △. IDENTIFICATION MARK FOR THE CONTACT FINISH: SEE TABLE.
△. MEASURED AT 6mm FROM [-Z-]
△. MEASURED AT 2mm FROM [-Z-]
△. MARKED ONLY ON THE PART NUMBER 1376113-8 AND 1376113-9,
1-1376113-1, 1-1376113-3, 1-1376113-5.
△. MATERIAL MARK
△. 1-1376113-3 ONLY

TABLE-1

POS. 極数	TYPE	PLUG HOUSING PART No. プラグハウジング型番
40	CRIMP	1318389
40	IDC	1318691 1318695

TABLE-2

SIGNAL	TIN	TERMINAL No. 端子型番	APPLICABLE WIRE RANGE (FEMALE) 適用電線(メス)
025		1123343-1	AVSS/CAVS/CAVUS 0.3~0.5mm ² AVSSH-f 0.3~0.5mm ²

TABLE-3

THICKNESS PF PCB (mm) フロント基板板厚 (mm)	1.2	1.6
NOMINAL LENGTH OF SCREW (mm) 固定用ネジ着下長さ (mm)	5	6

3	>SPS-GF17<	8.4	∅2.63	PAPER BOX タンホール	PLASTIC TUBE プラスチックチューブ	SELECTIVE-TIN (MATTE)	SELECTIVE-TIN (BRIGHT)	SPS GF17	BLACK	1-1376113-5
1	>PBT-GF30<	10.4	∅2.4	PAPER BOX タンホール	PLASTIC TUBE プラスチックチューブ	PRE-TIN x 40		PBT GF30	NATURAL	1-1376113-3
3	>SPS-GF17<	8.4	∅2.63	PLASTIC BOX 通い箱	PLASTIC TUBE プラスチックチューブ	SELECTIVE-TIN (MATTE)	SELECTIVE-TIN (BRIGHT)	SPS GF17	BLACK	1-1376113-1
6	>SPS-GF17<	8.4	∅2.63	PAPER BOX タンホール	PLASTIC TUBE プラスチックチューブ	SELECTIVE-TIN (MATTE)	SELECTIVE GOLD	SPS GF17	NATURAL	1376113-9
5	>PBT-GF30<	10.4	∅2.4	PAPER BOX タンホール	PLASTIC TUBE プラスチックチューブ	SELECTIVE-TIN (MATTE)	SELECTIVE-TIN (BRIGHT)	PBT GF30	NATURAL	1376113-8
SEE DWG 1376113-5										1376113-7
4	>PBT-GF30<	10.4	∅2.4	PAPER BOX タンホール	PLASTIC TUBE プラスチックチューブ	SELECTIVE-TIN (MATTE)	SELECTIVE TIN x 38 SELECTIVE GOLD x 2	PBT GF30	NATURAL	1376113-6
SEE DWG 1376113-5										1376113-5
1	>PBT-GF30<	10.4	∅2.4	PAPER BOX タンホール	PLASTIC TUBE プラスチックチューブ	PRE-TIN x 40		PBT GF30	NATURAL	1376113-2
1	>PBT-GF30<	10.4	∅2.4	PLASTIC BOX 通い箱	PLASTIC TUBE プラスチックチューブ	PRE-TIN x 40		PBT GF30	NATURAL	1376113-1
MARKING マーキング	MATERIAL MARK 材料マーク	WEIGHT (g) 質量	V	OUTER 外装	INNER 内装	SOLDERING SIDE 半田付け部	CONTACT SIDE 接点部	MATERIAL 材料	COLOR 色	PART NUMBER 製品番
				PACKING STYLE 梱包形態		CONTACT FINISH コンタクト仕上				

THIS DRAWING IS A CONTROLLED DOCUMENT. OWN: R. KOMIYAMA 22JUN00, CHK: N. SAI 22JUN00, APVD: N. SAI 22JUN00. DIMENSIONS: mm. TOLERANCES UNLESS OTHERWISE SPECIFIED: 0-PHOS: ±0.3, 1-PLC: ±, 2-PLC: ±, 3-PLC: ±, 4-PLC: ±. MATERIAL: CONTACT: BRASS, HOUSING: SEE TABLE. FINISH: SEE TABLE. WEIGHT: SEE TABLE. CUSTOMER DRAWING. DATE: 114-5250. SIZE: A1. SHEET: 1 OF 2. REV: C4.

STE TE Connectivity
025 SERIES 40P(PCB V-TYPE) CAP HSG ASSY

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT 2011

ALL RIGHTS RESERVED.

LOC
JDIST
-REVISIONS
変更

P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

49.4 REF
46.2 REF

15.8 REF
30.9 REF
PLUG HOUSING ASSEMBLY
CAP HOUSING ASSEMBLY

CAP ASSEMBLY & PLUG ASSEMBLY ENGAGEMENT DRAWING
キャップアッセンブリ & プラグアッセンブリ 嵌合図

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位: 概
mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

一般公差	±
0 PLC	±0.1
1 PLC	±0.01
2 PLC	±0.001
3 PLC	±0.0001
4 PLC	±0.0001
ANGLES	±1.00'

MATERIAL
材料FINISH
仕上

DWN

CHK

APVD

PRODUCT SPEC
製品規格

SEE 1 OF 2

APPLICATION SPEC
取付適用規格

SEE 1 OF 2

WEIGHT

SEE 1 OF 2

Customer Drawing

TE Connectivity

NAME
名称
025 SERIES 40P(PCB V-TYPE)
CAP HSG ASSY

SIZE

A3

CAGE CODE

00779

DRAWING NO
番号

C-1376113

RESTRICTED TO

-

SCALE
尺度 4:1

SHEET 2 OF 2

REV C4

1470-19 (3/11)