



Connectors > Contacts > Connector Contacts > Contact: Component To Wire; 15A, 28-14 wire size



Contact Type: **Receptacle**

Contact Mating Area Plating Material: **Gold (Au)**

Wire Contact Termination Area Plating Material: **Gold**

Operating Voltage: **250 VAC**

Compatible With Wire & Cable Type: **Discrete Wire**

All Contact: Component To Wire; 15A, 28-14 wire size (91)

Features

Product Type Features

Discrete Wire Type	Stranded
Sealable	No

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Electrical Characteristics

Operating Voltage	250 VAC
-------------------	---------

Contact Features

Contact Length	17.8 mm[.7 in]
Barrel Type	Open
Contact Type	Receptacle
Contact Mating Area Plating Material	Gold (Au)
Wire Contact Termination Area Plating Material	Gold
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	15 A
Mating Tab Width	2 mm[.08 in]
Mating Tab Thickness	.64 mm[.025 in]
Contact Mating Area Plating Material Thickness	.38 µm[15 µin]



Wire Contact Termination Area Plating Thickness	.38 µm[15 µin]
Contact Orientation	Straight

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Mechanical Attachment

Wire Insulation Support	With
-------------------------	------

Dimensions

Wire Size	.5 – 1.42 mm²
Compatible Insulation Diameter Range	1.8 – 2.8 mm[.07 – .11 in]

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Quantity	12000
Packaging Method	Reel & Box

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free



Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 5-2836204-1 OCEAN-2.0-APPLICATOR-S-090F110OV-RSM	 TE Part # 5-2151018-2 OCEAN_2.0-APPLICATOR-S-090F110F-RSA	 TE Part # CAT-D9934-A75A Receptacle and Tab Housing: 3.81 mm pitch, 250V	 TE Part # 917249-1 DYNAMIC D-3400F REC HSG 20P
 TE Part # CAT-D9934-A75C Receptacle and Tab Housing: 5.08 mm pitch, 600V	 TE Part # 2305570-1 Strip Terminal Cutter-Side Feed-No Crimp	 TE Part # 234168-1 EXTRACTION TOOL(DYNAMIC D-3)	 TE Part # 2151018-2 OCEAN_2.0-APPLICATOR-S-090F110F-RSA
 KIT TE Part # 7-2836204-7 OCEAN_2.0-SPARE_PART_KIT-090F110OV	 TE Part # CAT-D9934-A75B Receptacle and Tab Housing: 5.08 mm Pitch, 250-600V	 TE Part # 2151018-1 OCEAN_2.0-APPLICATOR-S-090F110F-RSM	 TE Part # 2836204-1 OCEAN-2.0-APPLICATOR-S-090F110OV-RSM



TE Part # 5-2836204-2
OCEAN-2.0-APPLICATOR-S-090F110OV-RSA



TE Part # 5-2151018-1
OCEAN_2.0-APPLICATOR-S-090F110F-RSM



TE Part # 178214-1
DYNAMIC 3400 REC HSG 12P



TE Part # 7-2151018-7
OCEAN_2.0_SPARE_PART_KIT-090F110F



TE Part # 2836204-2
OCEAN-2.0-APPLICATOR-S-090F110OVA-RSA

Also in the Series | Dynamic 3000 Series




Connector Contacts(94)




Connector Hardware(8)



Insertion & Extraction Tools(2)

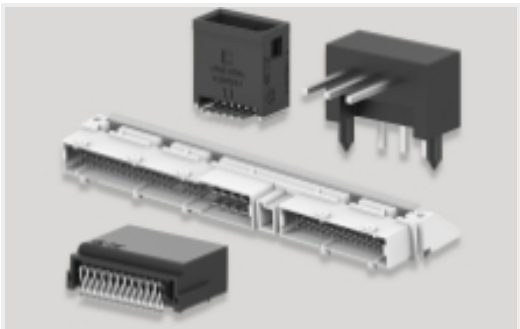

PCB Headers & Receptacles(290)

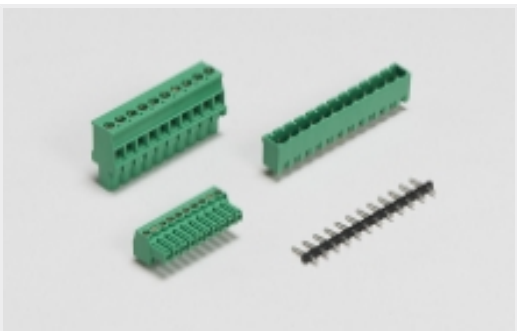


PCB Terminal Blocks(5)



Power Contacts(94)



Rectangular Power Connectors(443)

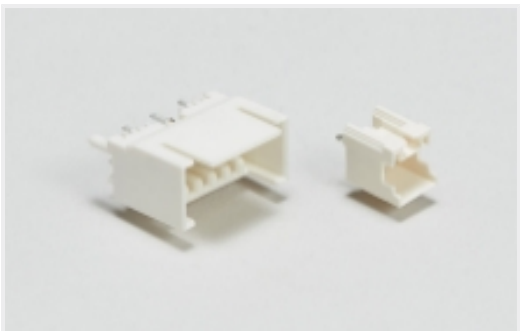

Wire-to-Board Headers & Receptacles (290)

Customers Also Bought



TE Part #175285-2
DYNAMIC D-3 TAB CONT. M PdNi & Au 0.38



TE Part #1-178128-6
DYNAMIC 3200 REC HSG 6P X



TE Part #3-1554809-3
RITS CONN. PLUG ASSY 3P ORANGE COVER



TE Part #4-1554809-3
RITS CONN. PLUG ASSY 3P GREEN COVER



TE Part #2-1827875-8
DYNAMIC 1200D HDR ASSY V 16PY
BLACK GOLD

TE Part #1-1939760-8
HDR ASSY (H-TYPE) 8POS X-KEY Au

TE Part #2382569-1
32POS,NANOMQS,REC HSG,UNSLD,
COD A,STD

TE Part #61-0401-011-P00
contact pin d=0.6

TE Part #40-B190-000-000
ethernet element, 8-pin, pin

TE Part #40-B189-000-000
ethernet element, 8-pin, socket

Documents

Product Drawings

DYNAMIC D-3 REC CONT. L PdNi & AU 0.38

English

CAD Files

Customer View Model

ENG_CVM_CVM_175196-2_AG.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_175196-2_AG.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_175196-2_AG.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (non U.S.)

Japanese

MULTIPLE ENCLOSURE 67M D1200 15POS. REC PLUG

Japanese



Instruction Sheet (non U.S.)

English

Agency Approvals

TUV Certificate

English

TUV Certificate

English