160655-2 ✓ ACTIVE

FASTIN-FASTON | FASTIN-FASTON 110

TE Internal #: 160655-2

Quick Disconnect Receptacle, Uninsulated, 20 – 15 AWG, .51 – 1.65 mm² Wire, 2.8 mm [.11 in] Tab Width, F-Crimp, Straight, FASTIN-FASTON 110
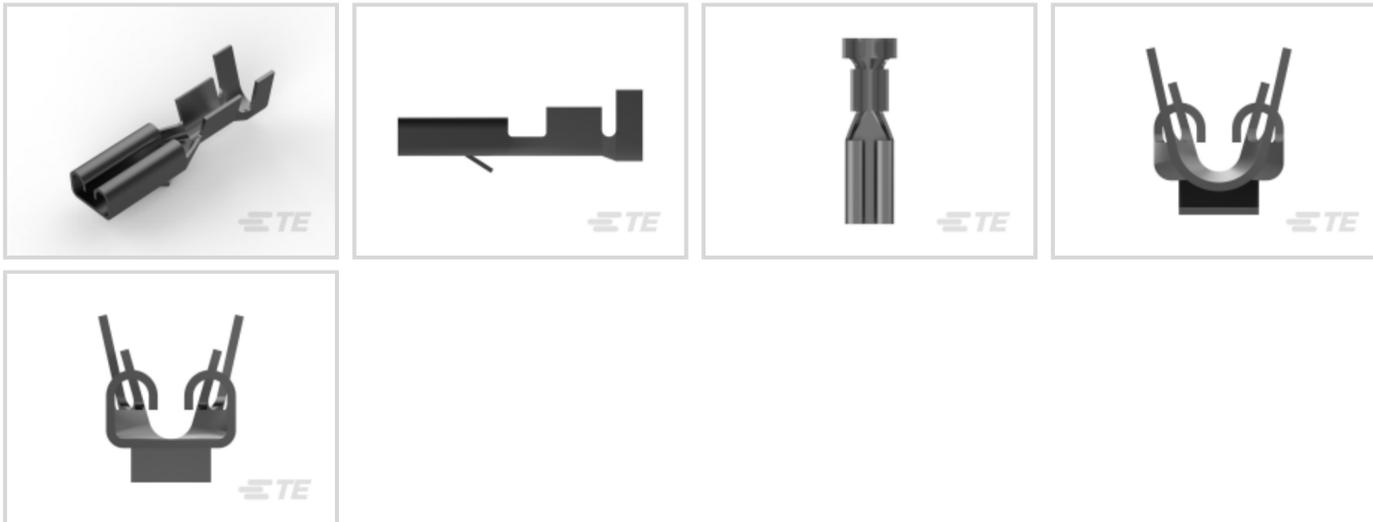
View on TE.com >

Terminals & Splices > Quick Disconnects

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.51 – 1.65 mm²**

Mating Tab Width: **2.8 mm [.11 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Insertion Force	Normal

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	2.8 mm[.11 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Phosphor Bronze
Terminal Plating Material	Pre-Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

160655-2

Quick Disconnect Receptacle, Uninsulated, 20 – 15 AWG, .51 – 1.65 mm² Wire, 2.8 mm [.11 in] Tab Width, F-Crimp, Straight, FASTIN-FASTON 110

Product Terminates To	Wire & Cable

Mechanical Attachment

	.038 in
Wire Insulation Support	With
Mating Retention Type	Dimple

Dimensions

Product Length	14 mm[.551 in]
Compatible Insulation Diameter Range	2.01 – 3.1 mm[.079 – .122 in]
Terminal Material Thickness	.25 mm[.01 in]
Wire Size	.51 – 1.65 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Packaging Features

Packaging Quantity	1000
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent

160655-2

Quick Disconnect Receptacle, Uninsulated, 20 – 15 AWG, .51 – 1.65 mm² Wire, 2.8 mm [.11 in] Tab Width, F-Crimp, Straight, FASTIN-FASTON 110

chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

TE Part # 925015-1
FF 110 REC HSG 3P NYLON BLACK

TE Part # 2150017-2
OCEAN_2.0_Applicator-E-070F130F-REA

TE Part # 2150017-1
OCEAN_2.0_Applicator-E-070F130F-REM

TE Part # 7-2150017-7
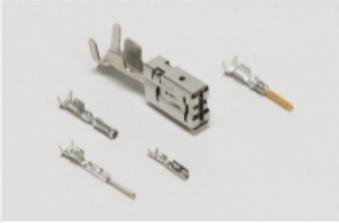OCEAN_2.0_SPARE_PART_KIT-070F130F

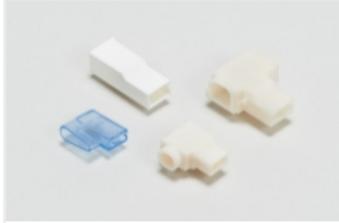## Also in the Series | FASTIN-FASTON 110

Automotive Housings(6)

Automotive Signal & Power Connector Housings(6)

Automotive Terminals(5)

Crimp Terminal Housings(33)

Insertion & Extraction Tools(3)

Quick Disconnects(75)

Customers Also Bought

160655-2

Quick Disconnect Receptacle, Uninsulated, 20 – 15 AWG, .51 – 1.65 mm² Wire, 2.8 mm [.11 in] Tab Width, F-Crimp, Straight, FASTIN-FASTON 110

TE Part #100494-2
187 FASTON,REC.,16-20 AWG,TPBR

TE Part #6-160430-6
187 FASTON REC 20-16 AWG BR

TE Part #172383-2
FF 250 REC HSG 2P NYLON BLCAK P/M

TE Part #626057
FASTIN-ON 110 HOUSING TAB NAT 6.6 NYLON

TE Part #1-1634200-7
PREDD3-07F-BB0FW

TE Part #1-1718484-3
CARRIER FOR RECEPTACLE INSERTS

TE Part #2176079-9
EP 3W 220R 5%

TE Part #281937-1
MIC MARKII TAB CONTACT

TE Part #653846-7
DRAHTCRIMPER

TE Part #1-690403-1
CRIMPER INSUL F

Documents

Product Drawings
FASTON 110 REC 20-15 AWG PTPB

English

CAD Files
3D PDF

3D

Customer View Model
ENG_CVM_CVM_160655-2_AJ.2d_dxf.zip

English

Customer View Model
ENG_CVM_CVM_160655-2_AJ.3d_igs.zip

English

Customer View Model
ENG_CVM_CVM_160655-2_AJ.3d_stp.zip

English

Datasheets & Catalog Pages

160655-2

Quick Disconnect Receptacle, Uninsulated, 20 – 15 AWG, .51 – 1.65 mm² Wire, 2.8
mm [.11 in] Tab Width, F-Crimp, Straight, FASTIN-FASTON 110

FASTIN_FASTON_Product_Line

English

Product Specifications

EB**General Application Specification for Open Barrel Terminals

English

Application Specification

English

Agency Approvals

UL Report

English