



LUMAWISE | LUMAWISE Dimming Receptacle


TE Internal #: 2213362-2

Connector, Not Rotatable, Wire-to-Component, 7 Position, Sealable, Power & Signal, LUMAWISE Dimming Receptacle, ANSI Street Lighting Receptacles

[View on TE.com >](#)

Connectors > Lighting Connectors > Street Lighting Controls > Street Lighting Receptacles >

LUMAWISE Endurance N Poke-In: Streetlight Dimming Receptacles

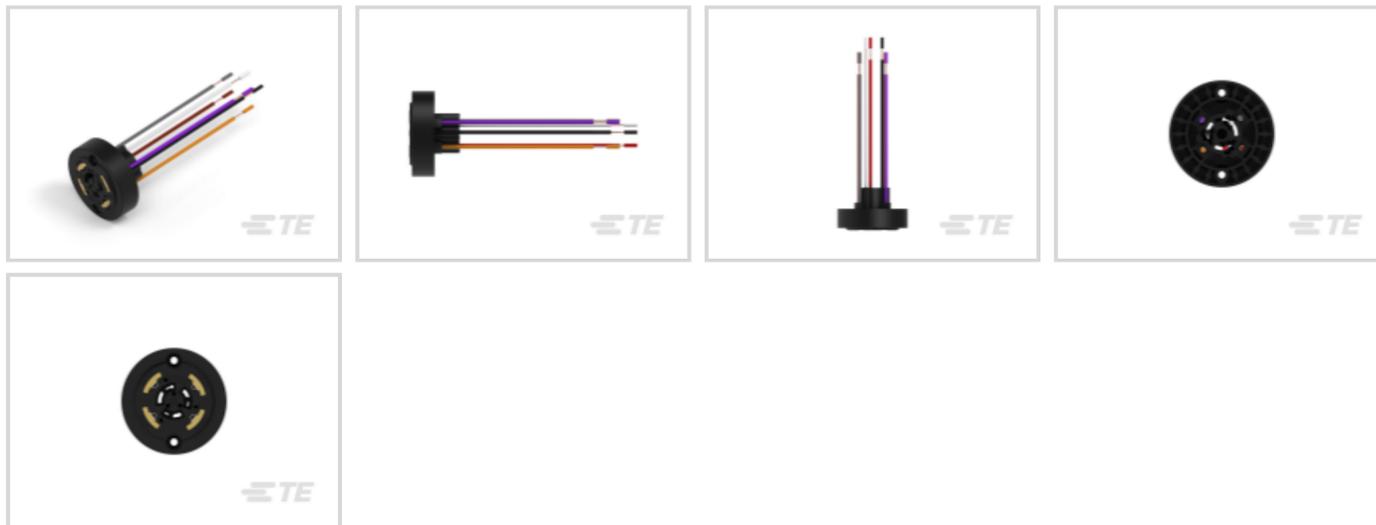

Lighting Product Type: **Connector**

Lighting Connector Features Included: **Not Rotatable**

Connector System: **Wire-to-Component**

Number of Positions: **7**

Sealable: **Yes**

[All LUMAWISE Endurance N Poke-In: Streetlight Dimming Receptacles \(33\)](#)

Features

Product Type Features

Connector & Contact Terminates To	Wire & Cable
Lighting Product Type	Connector
Connector System	Wire-to-Component
Sealable	Yes

Configuration Features

Lighting Connector Features Included	Not Rotatable
Number of Positions	7

Electrical Characteristics

Operating Voltage	600 VDC
-------------------	---------

Body Features

Primary Product Color	Black
-----------------------	-------



Contact Features

Contact Current Rating (Max)	15 A
Contact Mating Area Plating Material	Gold (Au)

Dimensions

Wire Size	18 – 14 AWG
-----------	-------------

Usage Conditions

Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
-----------------------------	---------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Product Compliance


[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

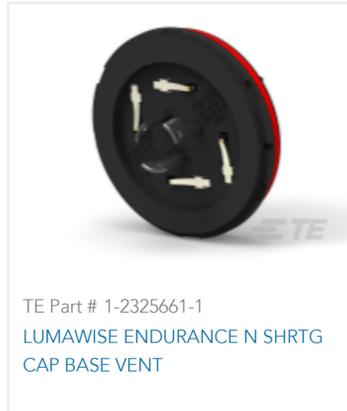

Also in the Series | **LUMAWISE Dimming Receptacle**

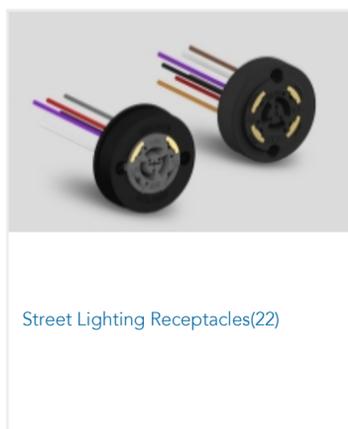

Customers Also Bought





Documents

Product Drawings

[Rcpt Assy, Dimmable Photocontrol, 150C, 3/4](#)

English

CAD Files

Customer View Model

[ENG_CVM_CVM_2213362-2_B.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2213362-2_B.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2213362-2_B.2d_dxf.zip](#)

English

3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[LUMAWISE STREET LIGHT DIMMING AND CONTROL QUICK REFERENCE GUIDE](#)

English

[LUMAWISE Endurance N ANSI C136.41 Standard Dimming Receptacle Assembly](#)

English

[LUMAWISE Endurance N ANSI C136.41 Standard Dimming Receptacle Assembly](#)

German

[LUMAWISE Endurance N ANSI C136.41 Standard Dimming Receptacle Assembly](#)

[LUMAWISE Endurance N ANSI C136.41 Standard Dimming Receptacle Assembly](#)



LUMAWISE Endurance N ANSI C136.41 Standard Dimming Receptacle Assembly

Product Specifications

Application Specification

English

Application Specification

English

Agency Approvals

UL_CERT_CB_4789600659_TR_C1

English

UL_CERT_CB_US_37285_C1

English