



Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.2 – .51 mm²**

Mating Tab Width: **4.75 mm [.187 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Insertion Force	Normal
-----------------	--------

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	4.75 mm[.187 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

--	--



Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple

Dimensions

Product Length	15 mm[.591 in]
Compatible Insulation Diameter Range	1.02 – 1.78 mm[.04 – .07 in]
Terminal Material Thickness	.3 mm[.012 in]
Wire Size	.2 – .51 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Industry Standards

Compatible With Agency/Standards Products	CSA, UL
---	---------

Packaging Features

Packaging Quantity	10000
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>


EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

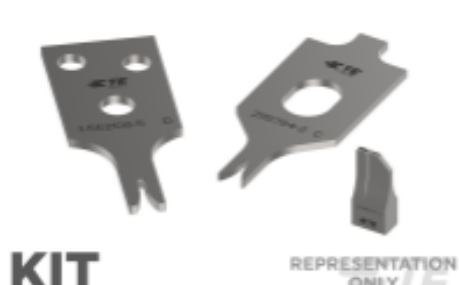

KIT

REPRESENTATION ONLY


TE Part # 7-2150072-7
[OCEAN_2.0_SPARE_PART_KIT-055F080F](#)




TE Part # 2150072-2
[OCEAN_2.0_Applicator-E-055F080F-REA](#)



TE Part # 881624-2
[187 FASTON REC 17-14 AWG TPBR](#)

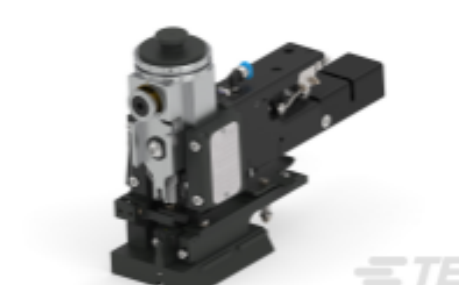


TE Part # 2150072-1
[OCEAN_2.0_Applicator-E-055F080F-REM](#)

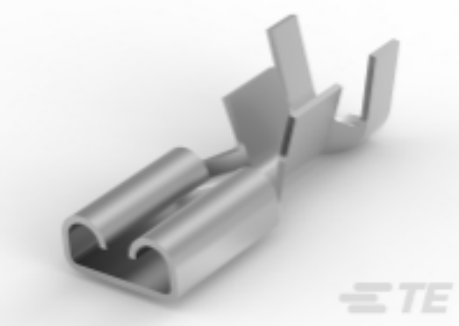

TE Part # 6-160429-2
[187 FASTON REC 17-14 AWG TPBR](#)

Also in the Series | FASTON 187

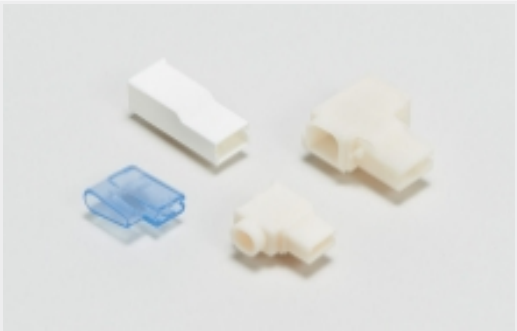

[Crimp Terminal Housings\(40\)](#)



[Insertion & Extraction Tools\(1\)](#)



[Insulation Boots & Sleeves\(1\)](#)



[PCB Terminals\(42\)](#)



Quick Disconnects(200)

Customers Also Bought



TE Part #ASA876N0085050A000
617 PLUG, SPEEDTEC



TE Part #87046-2
MOD IV RECP LP




TE Part #292206-5
MINI CT SGL DIP H 5P NAT




TE Part #2-292206-7
MINI CT SGL DIP H 7P BLACK



TE Part #3-292207-8
MINI CT SGL DIP V 18P BLACK

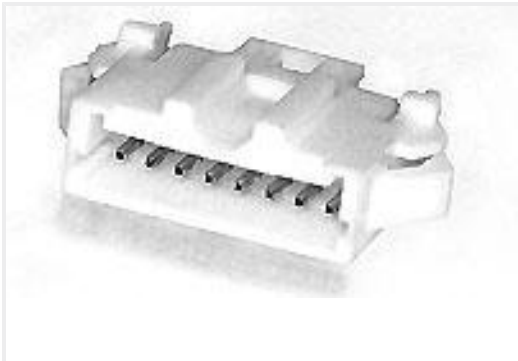


TE Part #292215-5
MINI CT SGL RELAY 5P NAT

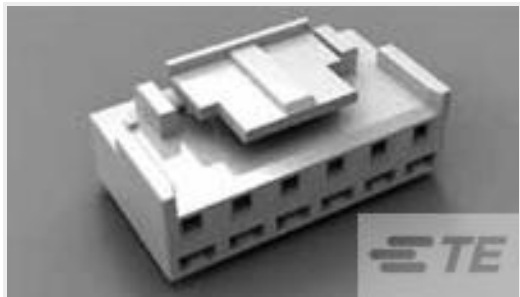


TE Part #1-1123722-9
3.96 EP PLUG HSG 9P(NATURAL)



TE Part #6-1676966-1
SMW2 33R 5%

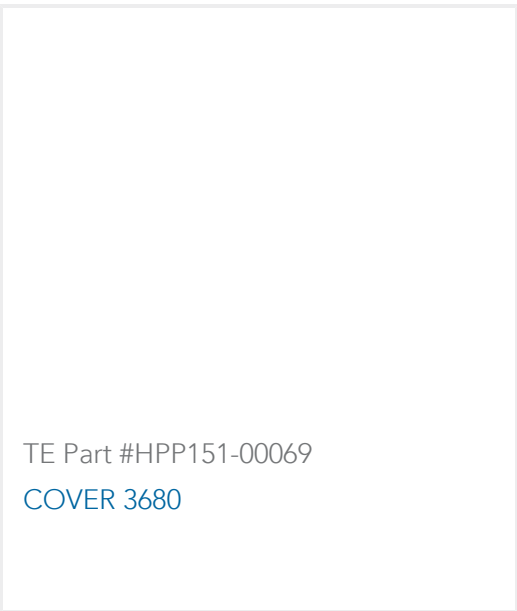

TE Part #HPP151-00069
COVER 3680

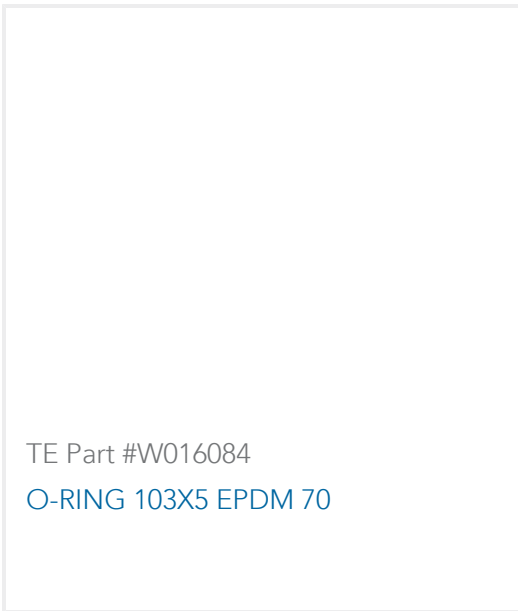

TE Part #W016084
O-RING 103X5 EPDM 70

Documents

Product Drawings

187 FASTON,REC.,30-24 AWG,TPBR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_342368-2_D.2d_dxf.zip



English

Customer View Model

[ENG_CVM_CVM_342368-2_D.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_342368-2_D.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[FASTON TERMINALS \(INSULATED AND UNINSULATED\) - FULL CATALOG](#)

English

Product Specifications

[Application Specification](#)

English