



Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Tab**

Wire Size: **1021 – 2048 CMA**

Mating Tab Width: **2.8 mm [.11 in]**

Features

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

Contact Features

Quick Disconnect Terminal Type	Tab
Mating Tab Width	2.8 mm [.11 in]
Mating Tab Thickness	.79 mm [.031 in]
Terminal Orientation	Straight
Contact Base Material	Copper Tin Alloy
Terminal Plating Material	Pre-Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Locking Lance Height	1.2 mm [.047 in]
----------------------	------------------



Mating Retention Type

Locking Lance

Dimensions

Product Length

22.5 mm [.886 in]

Compatible Insulation Diameter Range

1.4 – 2.3 mm [.055 – .09 in]

Wire Size

1021 – 2048 CMA

Usage Conditions

Insulation Option

Uninsulated

Operating Temperature Range

-40 – 130 °C [-40 – 266 °F]

Packaging Features

Packaging Quantity

4000

Packaging Method

Reel

Product Compliance

For compliance documentation, visit the product page on [TE.com](https://www.te.com)>

EU RoHS Directive 2011/65/EU

Compliant

EU ELV Directive 2000/53/EC

Compliant

China RoHS 2 Directive MIIT Order No 32, 2016

有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold

EU REACH Regulation (EC) No. 1907/2006

Current ECHA Candidate List: JUNE 2025 (250)
 Candidate List Declared Against: JUNE 2025 (250)
 Does not contain REACH SVHC

Halogen Content

Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



KIT
REPRESENTATION ONLY

TE Part # 7-2151379-7
OCEAN_2.0_SPARE_PART_KIT-080F110OV



TE Part # 2305570-1
Strip Terminal Cutter-Side Feed-No Crimp



TE Part # 2151379-2
OCEAN_2.0_Applicator-S-080F110OV-RSA



TE Part # 2151379-1
OCEAN_2.0_Applicator-S-080F110OV-RSM



TE Part # CAT-T4827-CH8172
Timer Connector Housing




TE Part # 4-1579007-3
EXTRACTION TOOL KIT



TE Part # 1-1579007-4
EXTRACTION TOOL


Also in the Series | FASTIN-FASTON 110




Automotive Housings(6)




Automotive Signal & Power Connector Housings(6)



Automotive Terminals(5)

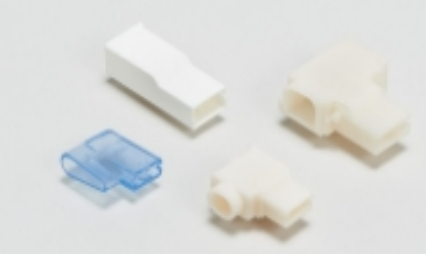

Crimp Terminal Housings(33)



Quick Disconnects(75)

Customers Also Bought



TE Part #SPD-4-3
STRING POT 4.75 INCH RANGE



TE Part #5510310004
PD-CAP-3/16-0



TE Part #163007
FF 250 REC HSG 8P NYLON CLEAR



TE Part #182524-2
187 FASTON,REC.,17-14 AWG,TPPB



TE Part #1-927771-1
JPT REC 2.8 Contact SRC Au



TE Part #CAT-T4827-CH8172
Timer Connector Housing



TE Part #3-1622820-4
3520 2R2 5%



TE Part #3-2176055-5
RLP73K 2B R27 1% 1K RL

Documents

Product Drawings

[FF 110 TAB 0.5-1 MM2 .080 F PTP CUZN30](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_928930-5_P.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_928930-5_P.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_928930-5_P.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[FASTIN_FASTON_Product_Line](#)

English

Product Specifications

[2,8 mm Flachstecker](#)

English

[Application Specification](#)

English



[Application Specification](#)

German

[Application Specification](#)

English