

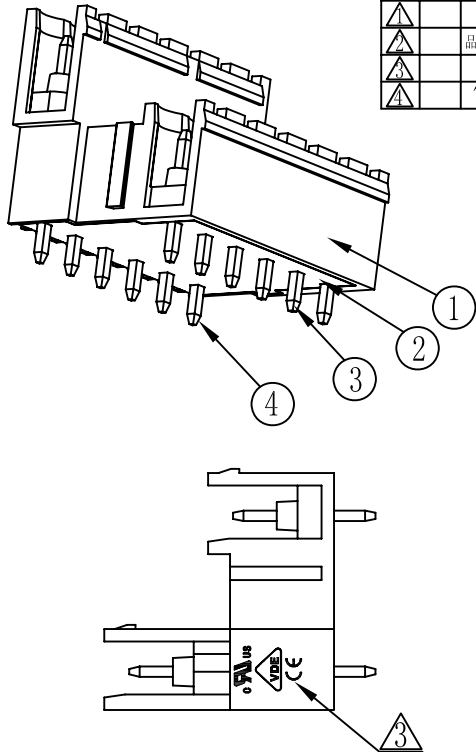
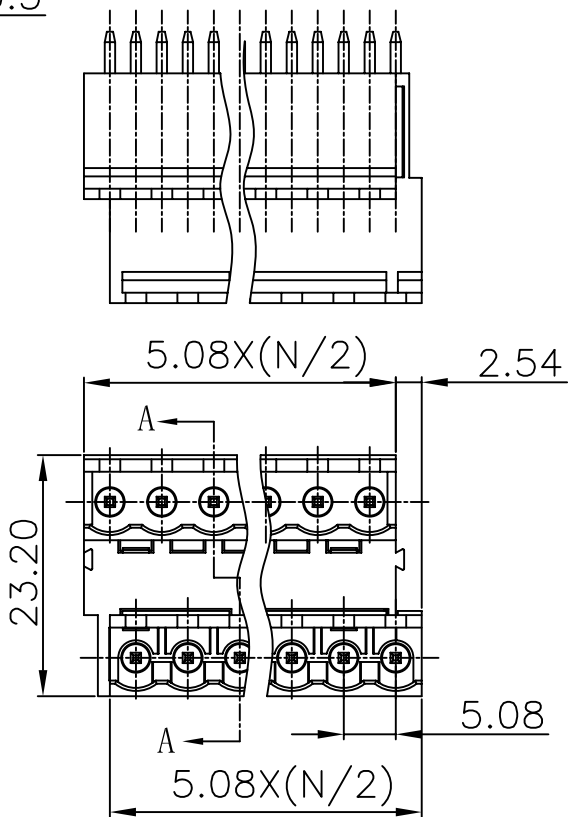


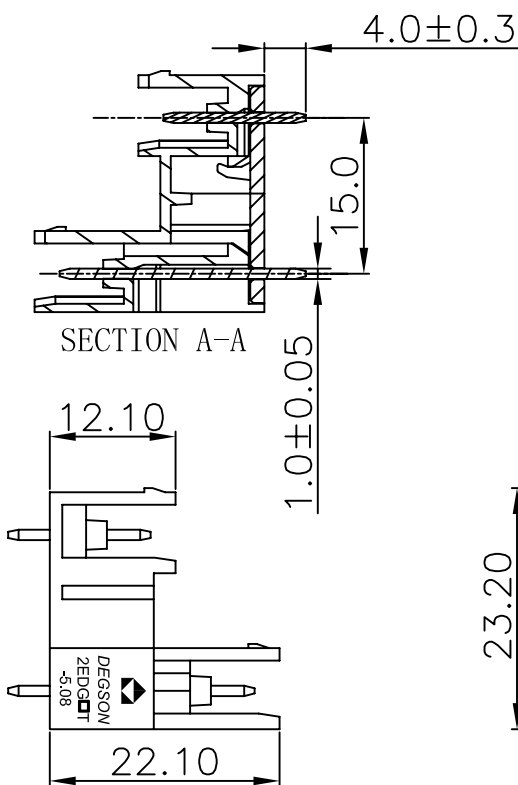

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		Drawing emend	CSX	05/06/06
△		品名、料号增加环保标示“(H)”	LJH	12/11/07
△		增加VDE刻字	WLM	11/04/08
△		“4-24P”修改为“4-48P”	WLM	01/09/09

- Notes:
- 1. Pitch: 5.08mm , poles: 4-48P (Even) △
 - 2. Rated voltage/current: UL 300V/15A
VDE 320V/10A
 - 3. Operation temperatures: -40°C ~ +105°C
 - 4. Withstanding Voltage: AC2000V/1Min
 - 5. Insulation Resistance: 5000MΩ/DC1000V
 - 6. Undimensioned Tolerances:

Pitch range in mm				Nominal dimension range in mm				
	over 6	over 10		over 30	over 60	over 100	over 150	
	to 10	to 24		to 30	to 60	to 100	to 150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10



ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
4	2EDGVT-long pin	1032B00010 (H)	XX	Brass	SnCe
3	2EDGV-pin	1007B00030 (H)	XX	Brass	SnCe
2	2EDGVT-5.08 cover	1056C0YXXA (H)	1	PA66	UL94V-0
1	2EDGVT-5.08 housing	1056A0YXXA (H)	1	PA66	UL94V-0

DETACHED LISTS	MM (INCH)	DFTO Haoyh	DATE 04/12/05
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE
		MFO	DATE
		APPVL	DATE
	MM		
	.0 ±		
	.00 ±		
	.000 ±		
	ANGLES ± 1°		
	THIRD ANGLE PROJECTION		
NAME		2EDGVT-5.08-XXP-1Y-00A(H)	
DRAWING NO. 2EDGVT-5.08-E01		SIZE A3	REV T4
/PART NO.		01/09/09	
SCALE :		DO NOT SCALE DRAWING	
SHEET 1		OF 1	