


2		1	
REV	CONTENT	CHK	DATE
V0.0	CONTENT	YL	24.02.17







Electrical :

- | | | |
|--|---------------|------|
| | UL | IEC |
| 1.Rated Voltage : | 300V | 320V |
| 2.Rated Current : | 8A | 7A |
| 3.Withstanding Voltage : | AC2500V/1Min. | |
| 4.Operating Temperature : | -40°C~+105°C | |
| 5.RoHS Compliance | | |
| 6."★" is the key quality control point | | |

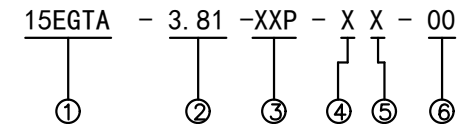

- ① Sereies NO. ④ 1 Single Pitch
2 Double Pitch
- ② Pitch ⑤ Color: 1 Grey
2 Blue
3 Black
4 Green
5 Orange
6 Red
7 Transparent
8 Yellow
9 White
- ③ Poles
02 02Contacts
03 03Contacts
... 24 24Contacts
- ⑥ Customer Request: 00--Standard

2	PIN		XX		P	Copper alloy			Tin Plated	
1	HOUSING		XX		1	PA66 UL94V-0			SEE NOTE	
ITEM	NAME OF PART		NO. OF PART		Q"TY	MATERIAL			NOTE	
DWG.	YL	DATE	24.02.17		SIZE	A4	UNITS	mm	SHEET/OF	1 / 1
CHK.	DATE				SCALE	1:1				
APP.	DATE				NAME	15EGTA-3.81-XXP-XX-00				
 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.					DWGNO	XXXX				

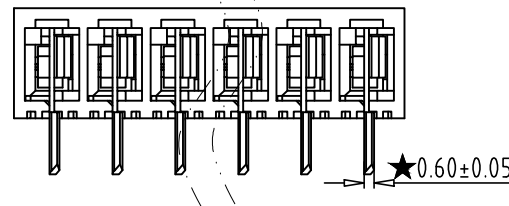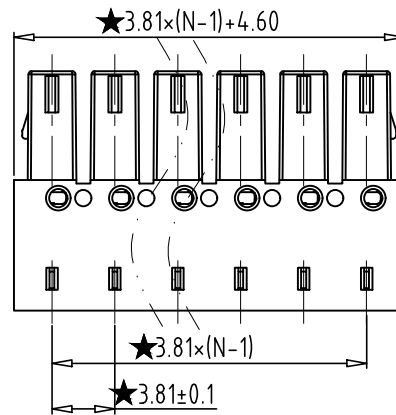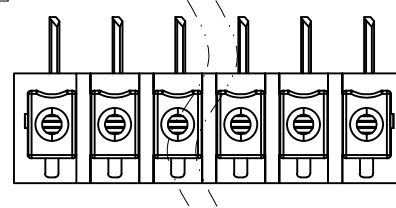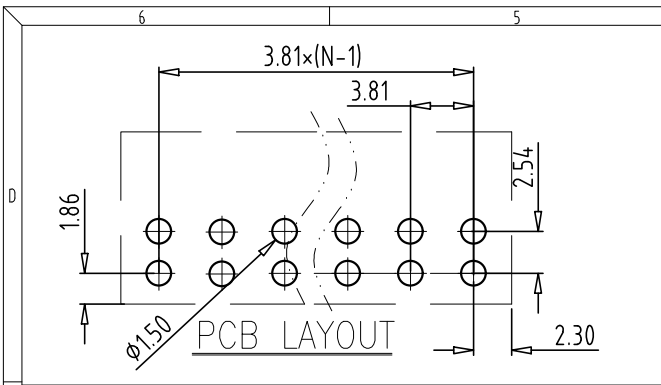

A	Total Pitch Tolerances in mm									Nominal dimension range in mm								$\perp$		$\equiv$	$-$		$//$	
	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 0	over 10		over 0	over 100	over 150
	to 30	to 53	to 70	to 90	to 115	to 150	to 250	to 350	to 500	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10		all	to 100	to 150	
	± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.60	± 0.70	± 0.85	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	0.5