

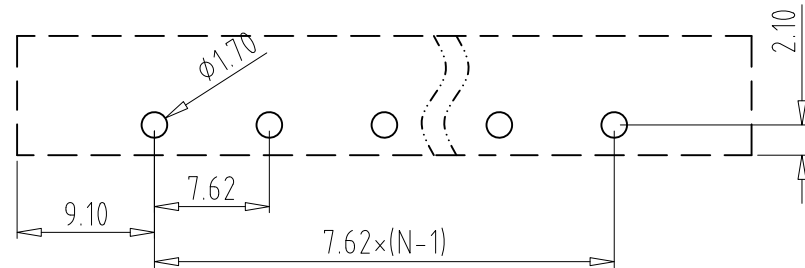




REV	CONTENT	CHK	DATE
V0.0	CONTENT	MYZ	21.07.03



PCB LAYOUT

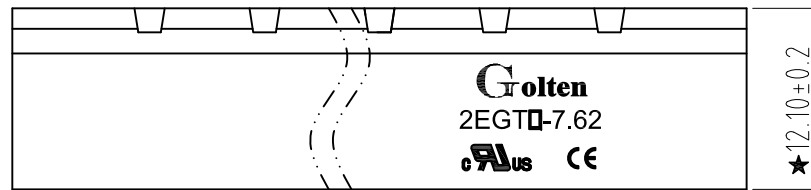

SECTION A-A

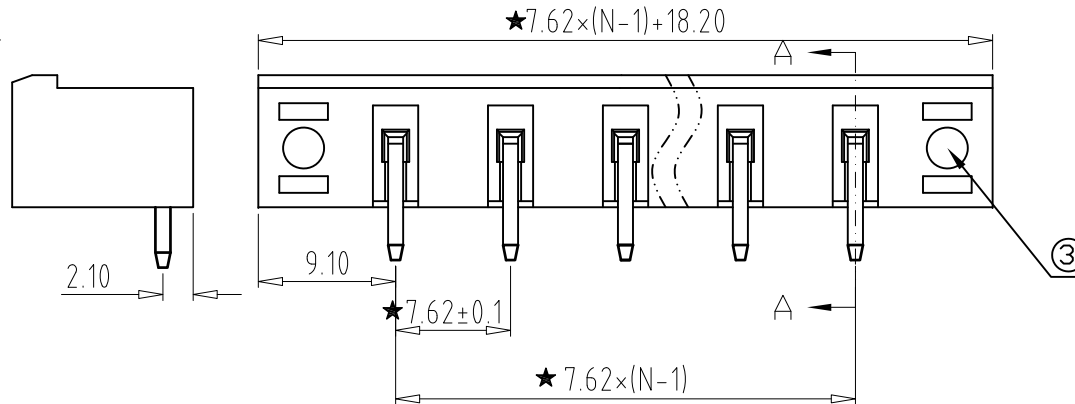

Electrical :

- 1. Rated Voltage : 300V (UL) 320V (IEC)
- 2. Rated Current : 15A
- 3. Withstanding Voltage : AC1600V/1Min.
- 4. Operating Temperature : -40°C ~ +105°C
- 5. RoHS Compliance
- 6. Safety Approval :
- 7. ★ " is the key quality control point

2EGTRM - 7.62 - XXP - X X - 100

① ② ③ ④ ⑤ ⑥

① Series NO. ④ 1 Single Pitch
2 Double Pitch

② Pitch

③ Poles

02 02Contacts
03 03Contacts
...
24 24Contacts

⑤ Color: 1 Grey
2 Blue
3 Black
4 Green
5 Orange
6 Red
7 Transparent
8 Yellow
9 White

⑥ Customer Request: 100--Standard

A	Total Pitch Tolerances in mm									Nominal dimension range in mm									$\perp$		$\equiv$	--- //			
	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 10	all	over 0	over 100	over 150
	to 30	to 53	to 70	to 90	to 115	to 150	to 250	to 350	to 500	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10	to 10		to 100	to 100	to 150	
	± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.60	± 0.70	± 0.85	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	0.5	

3	NUT	XX	2	Brass	--
2	PIN	XX	P	Brass	Tin Plated
1	HOUSING	XX	1	PA66(UL94V-0)	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	MYZ	DATE	21.07.03	SIZE	A4 UNITS mm
CHK.	DATE			SCALE	1:1
APP.	DATE				
				NAME	2EGTRM-7.62-XXP-XX-100
				DWGNO.	XXXX

Golten 宁波冠泰电子有限公司
NINGBO GOLTEN ELECTRONICS CO., LTD.