



Constant Current Driver

Model: LC65W700S



Model	Output Current	Input Current	Input Power	Output Power Range	PF	Efficiency	Output Voltage	No load Voltage
LC65W700S	700mA	0.35A	75W	39.2-65.1W	0.95	90%	56-93V	120V

*** Test result @230V, 50Hz, Full Load.**

1. Parameters

Category	Item	Technical Norm
Features	Output Type	Constant Current
	Output Features	Isolation
	IP Grade	IP20
	Insulation Class	Class I
Input	Rated Input Voltage	220-240VAC
	Range of Input Voltage	198-264VAC or 180-280VDC
	Range of DC Input Voltage	198-280VDC
	Frequency	0/50-60Hz
	Input Current	≤0.35A (230VAC, full load)
	Input Power	≤75W (230VAC, full load)
	Power Factor	≥0.95 (230VAC, full load)
	THD	≤15% (230VAC, full load)
	Inrush Current	≤45A/16us (230VAC, full load)
	Input Over Voltage protection	When input voltage over 330-390VAC, output will be cut off, and can withstand 2 hrs. That is auto recovery, when input voltage come back normal input voltage range.
Output	Output Voltage Range	56-93VDC
	No Load Voltage	120VDC Max.
	Output Current	700mA
	Max. Output Power	65W
	Efficiency	≥90% (230VAC, full load)
	Current Ripple(< 120 Hz)	±5% (Imax-Imin)/(Imax+Imin)
	PstLM	≤1
	SVM	≤0.4
	Current Accuracy	±5%
	Line Regulation	±5%
Load Regulation	±5%	

	Started Delay Time	≤0.5S (230VAC, full load)
Protection	Short Circuit Protection	Auto Recovery
	Overload Protection	Auto Recovery
	No-load Protection	/
	Insulation voltage	3000V 5mA 60S between P-S
	Insulation resistance	>100M ohm @ 500VDC
	Leakage current	I/P to O/P <0.7mA
Environment	Ta/Operation Temperature	-20....+50°C
	Ts/Storage Temperature	-40....+85°C
	Tc/Enclosure Temperature	85°C
	Humidity	10%....90%RH
	Atmospheric pressure	86-108KPa
Construction	Connection Method	Push-in Terminal
	Installation	Built-in
	PRI Wire preparation	0.75-1.5 [□]
	SEC Wire preparation	0.5-1.5 [□]
	Dimension	230x30x 21mm (L*W*H)
Standards	Certification	CE、EAC
	Safety Standards	EN 61347-1:2015/A1:2021 EN 61347-2-13:2014/A1:2017 EN IEC 62384:2020 EN 62493:2015 AS61347.2.13:2018 AS/NZS61347.1:2016 Inc A1 BS EN 61347-1:2015/A1:2021 BS EN 61347-2-13:2014/A1:2017 BS EN 62493:2015 BS EN IEC 62384:2020
	EMC Standards	EN IEC 55015:2019 EN IEC 55015:2019/A11:2020 EN IEC 61000-3-2:2019/A1:2021 EN 61000-3-3:2013/A2:2021 EN 61547:2009
	Performance	EN62384:2020
	Surge	L-N:1KV; L/N-PE:2KV;
	Others	RoHS
	REACH	EU Regulation (EC) No 1907/2006
	Life Time	50000h @Ta/ Tc
	Warranty	5years ,F.R. < 10000ppm
	Noise	≤ 24dB @Background noise ≤18dB ,Interval≥15cm
<p>Remark: 1.All Parameters, if not specified, are measured at 230VAC/50Hz and 25°C ambient temperature. 2.LED Driver is a component of the luminaires, Luminaires and wire layout will affect the EMC, please check the EMC with end products again.</p>		


2. Connected quantities of different current Breaker


TYPE	Connected quantities of different current Breaker						Input Voltage	Inrush Current	Time
	current (A)	10	13	16	20	25			
	Installation wire diameter	1.5mm ²	2.5mm ²	2.5mm ²	4mm ²	4mm ²			
TYPE B	23	30	38	47	59	@230VAC	25.6	528us	
TYPE C	38	49	60	75	94				
TYPE D	60	78	96	120	150				

3. Label


<input type="checkbox"/> ⊕ <input type="checkbox"/> L <input type="checkbox"/> N	KGP KGP Electronics GmbH Hueckstraße 19 DE-58511 Lüdenscheid	LED Driver LC65W700S Constant Current Type	Input Voltage:220-240VAC	U _{range} =56-93VDC	etc 	
			Input Frequency:50/60Hz	I _{rated} =700mA		
			Power Factor(λ):≥0.95	P _{range} =39.2-65.1W		
			I _{in} :≤0.35A	U _{out} :Max. 120VDC		
			For LED modules only	t _a :-20...50°C t _c :85°C		

4. Lifetimecurve

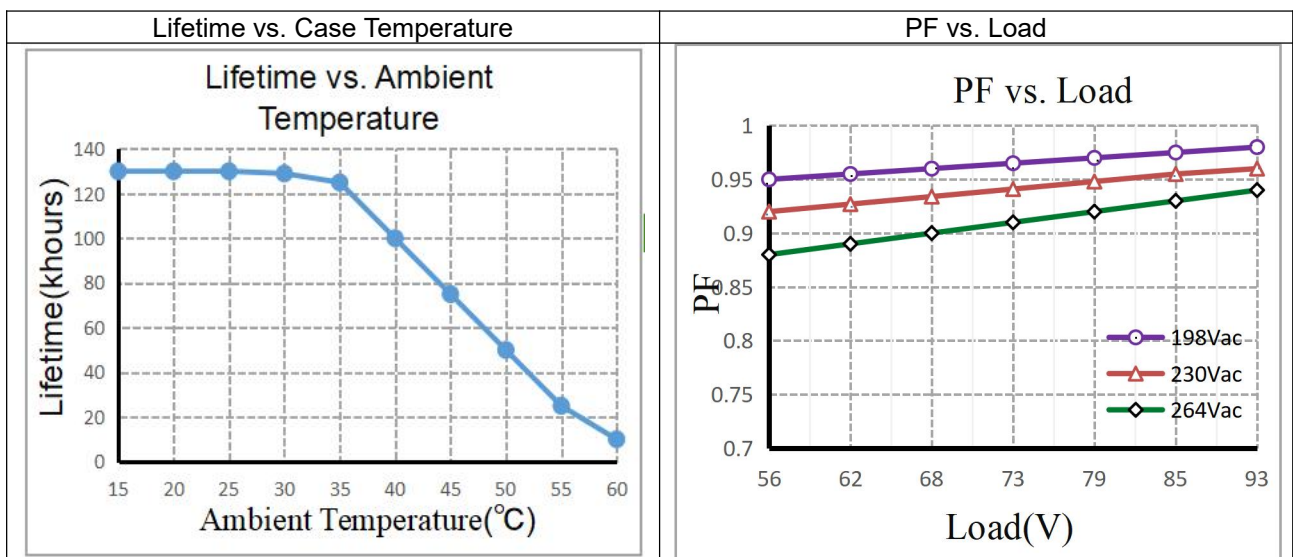


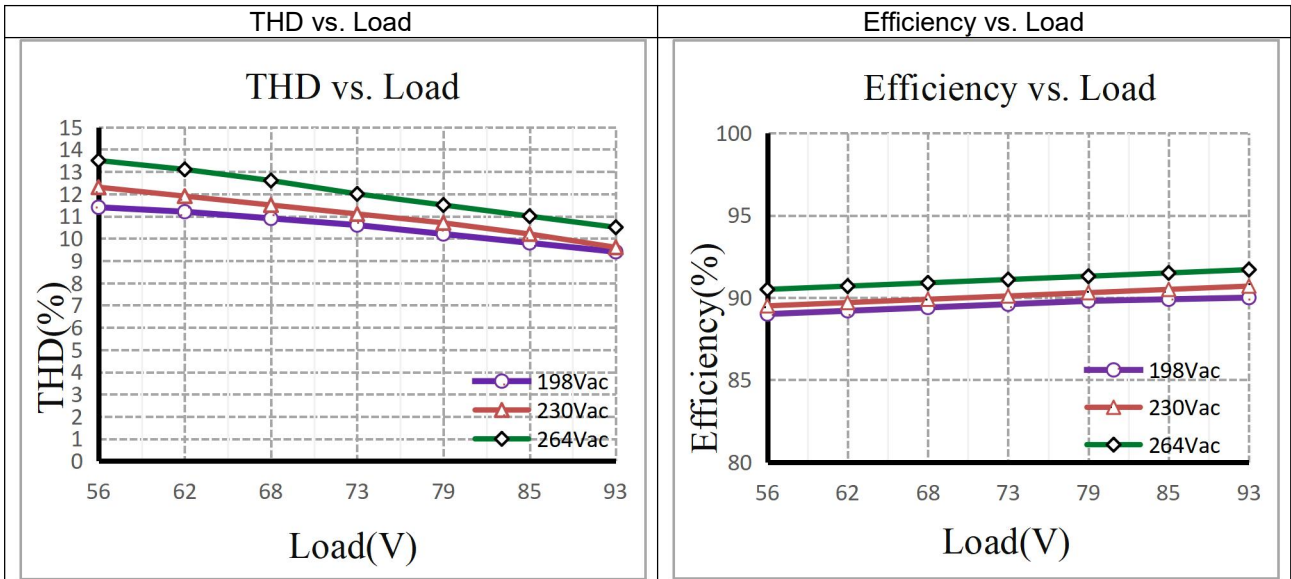

5. Dimension (Unit: mm)

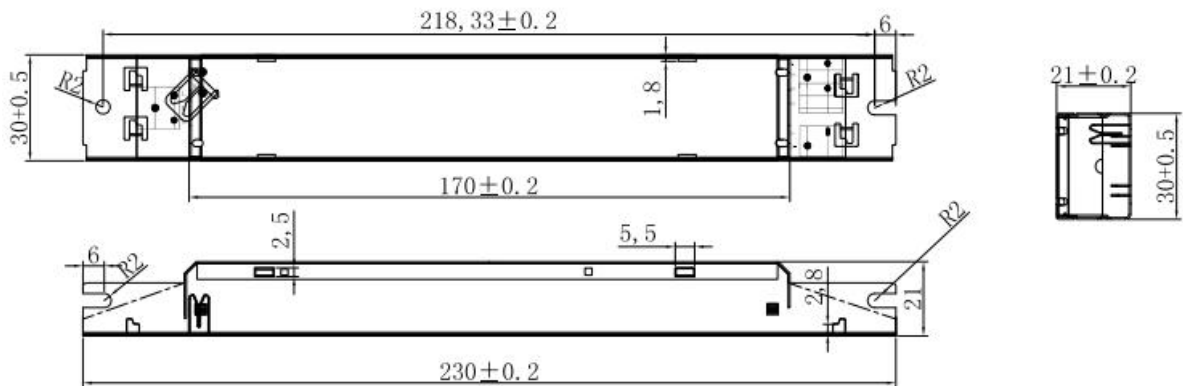

6. Wiring Diagram

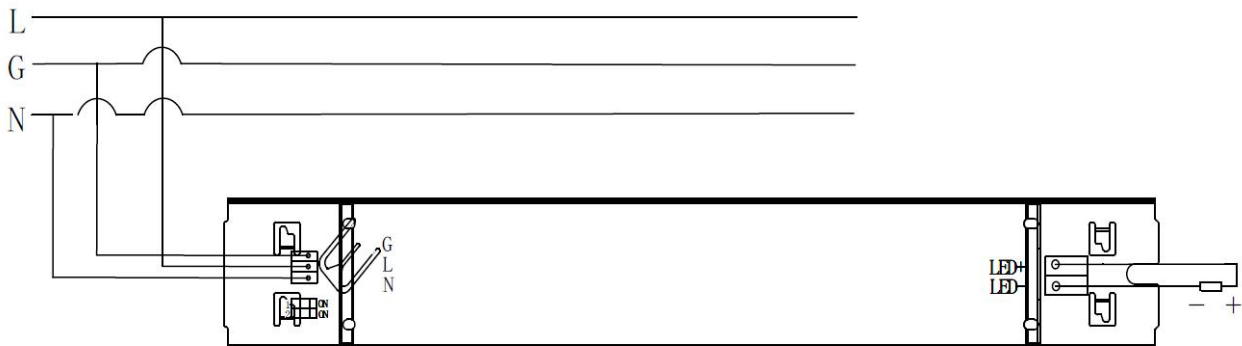

7. Packing information

Carton L*W*H(mm)	Pcs/Carton	Net weight/ Pcs(kg)	Net weight/ Carton(kg)	Gross weight / Carton(kg)
390*260*175mm	60PCS	0.175	10.5	13.5

8. Wiring instructions

- All connections must be kept as short as possible to ensure good EMI behaviour
- Mains leads should be kept apart from LED Driver and other leads (ideally 5 – 10 cm distance)
- Advice the maximum length of output wires is 3 m
- Secondary switching is not permitted (Except for constant voltage)
- Incorrect wiring can damage LED modules.
- The wiring must be protected against short circuits to earth (sharp edged metals parts, metal cable clips, louver, etc.)
- The lamp controlgear relies upon the luminaire enclosure for protection against accidental contact with live parts.

9. REVISION HISTORY

DATE	VER	REMARK
2024-11-4	V1.0	Initial release.