

REV	CONTENT	CHK	DATE
V0.0	CONTENT	LZW	24.08.07

Electrical :

- | | | |
|--|---------------|------------------------|
| | UL | TUV |
| 1.Rated Voltage : | 300V | 320V |
| 2.Rated Current : | 10A | 20A |
| 3.Wire Range: | 26-12AWG | 0.2-2.5mm ² |
| 4.Stripping Length : | 9-10mm | |
| 5.Withstanding Voltage : | AC1600V/1Min. | |
| 6.Operating Temperature : | -40°C~+105°C | |
| 7.RoHS Compliance | | |
| 8."★" is the key quality control point | | |

2EGTKDFM - 5.08 -XXP - X X - 00

① ② ③ ④ ⑤ ⑥

① Series NO. ④ 1 Single Pitch
2 Double Pitch


② Pitch:5.08mm ⑤ Color: 1 Grey
2 Blue
3 Black
4 Green
5 Orange
6 Red
...
24 24Contacts
7 Transparent
8 Yellow
9 White

⑥ Customer Request: 00--Standard

6	SCREW	XX	2	STEEL	Zn Plated
5	SPRING	XX	N	Stainless Steel	--
4	CLAMP	XX	N	COPPER ALLIY	Tin Plated
3	BUTTON	XX	N	PA66 UL94V-0	SEE NOTE
2	COVER	XX	1	PA66 UL94V-0	SEE NOTE
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	24.08.07	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.	DATE			SCALE	1:1
APP.	DATE			NAME	2EGTKDFM-5.08-XXP-XX-00
				DWGNO.	XXXX

Golten 宁波冠泰电子有限公司
NINGBO GOLTEN ELECTRONICS CO., LTD.

02P:Clasp on the left from this view

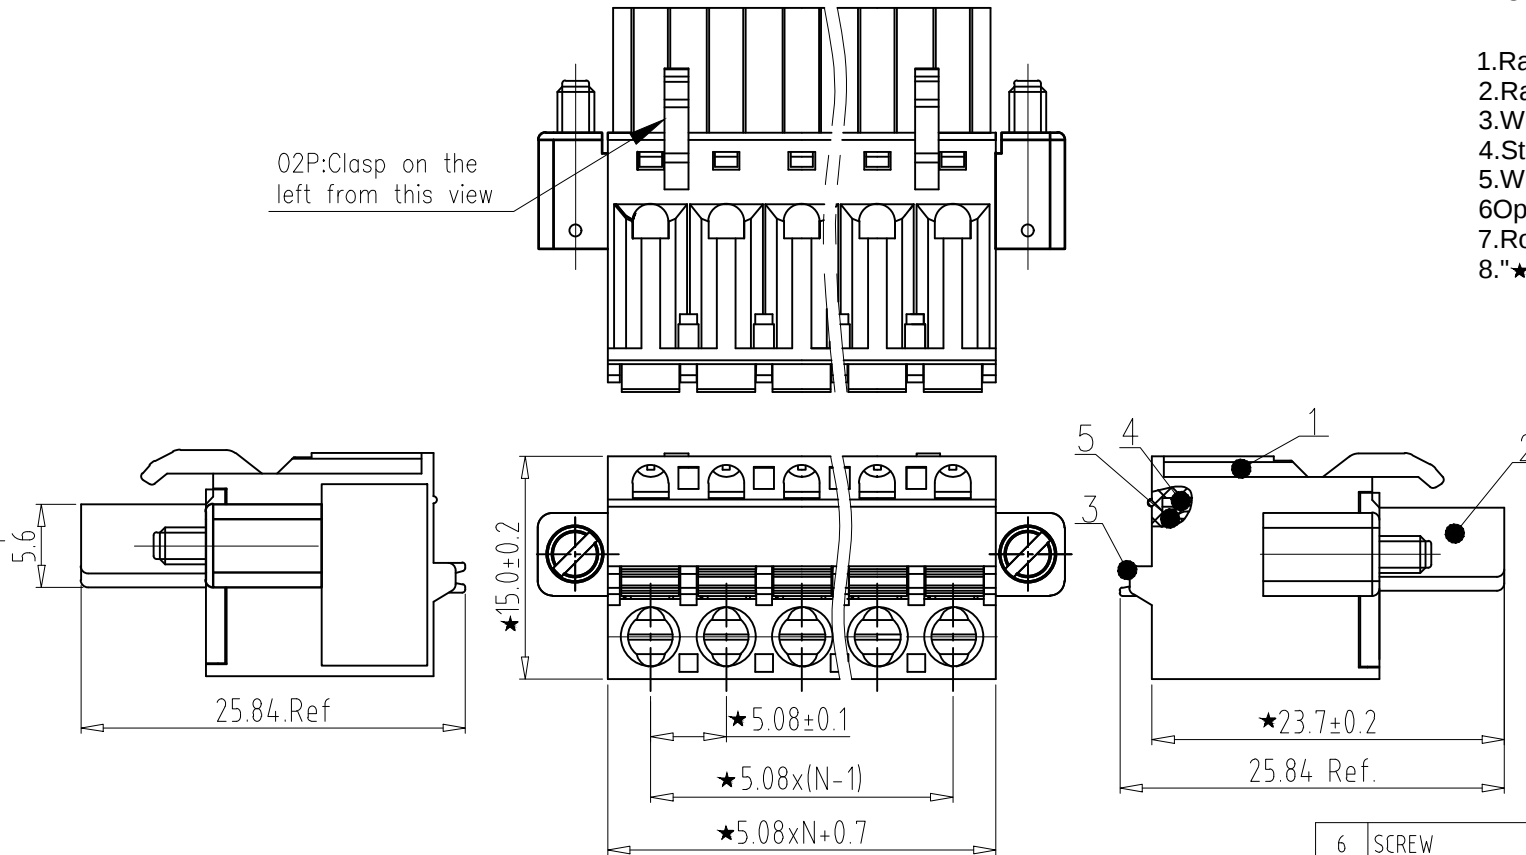

A	Total Pitch Tolerances									Nominal dimension range								$\perp$		$\equiv$	$-$		$//$	
	in mm									in mm														
	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
	0	30	53	70	90	115	150	250	350	0	30	53	70	90	115	150	200	250	0	over		0	100	over
	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	10	all	to	to	150
	30	53	70	90	115	150	250	350	500	30	53	70	90	115	150	200	250	320	10			100	150	
	± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.60	± 0.70	± 0.85	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	0.5