


# Pin terminal type PS19

## PS1927P02

### FEATURES

- High sound pressure.
- Piezo element is coated with water proof processing.

### SHAPE & DIMENSIONS

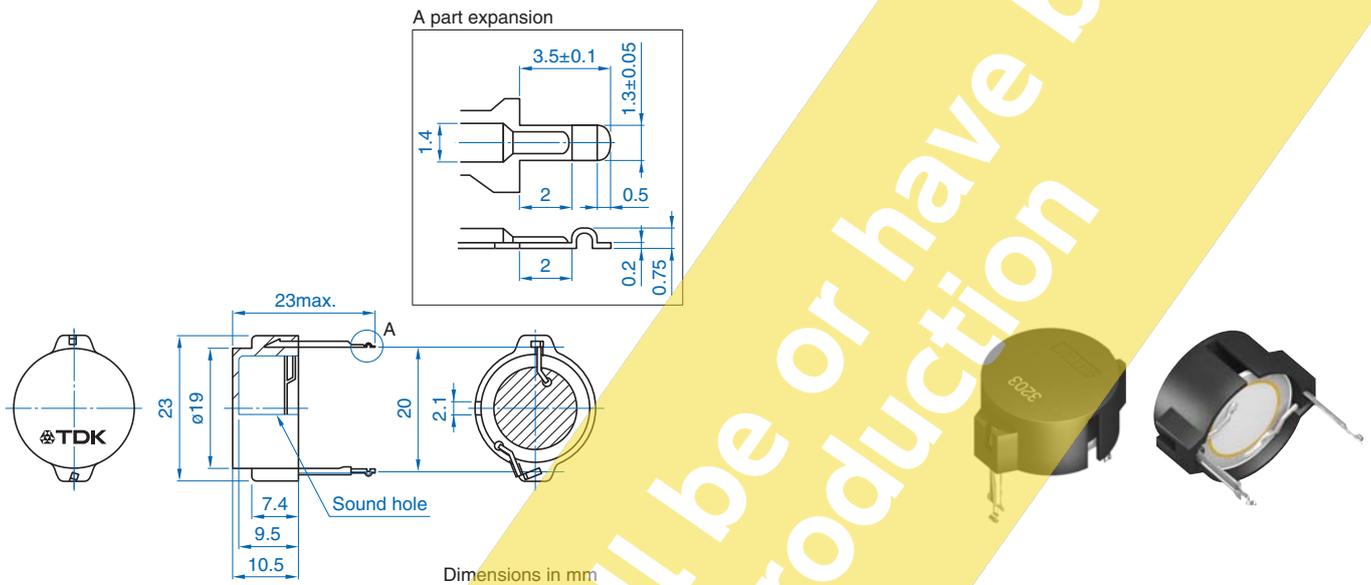


### SPECIFICATIONS


|                             |  |
|-----------------------------|--|
| Sound pressure              | 90dB(A)/10cm min. [at 2.7kHz, 10V <sub>0-P</sub> rectangular waves, measuring temperature:25±5°C, humidity:60±10%] |
| Operating temperature range | -10 to +70°C   |
| Storage conditions          | +5 to +40°C, 20 to 70%RH, please use within 6 months   |
| Maximum input voltage       | 20V <sub>0-P</sub> max. [without DC bias]  |
| Minimum delivery unit       | 600 pieces   |

### FREQUENCY SOUND PRESSURE CHARACTERISTICS

#### SINE WAVE DRIVE

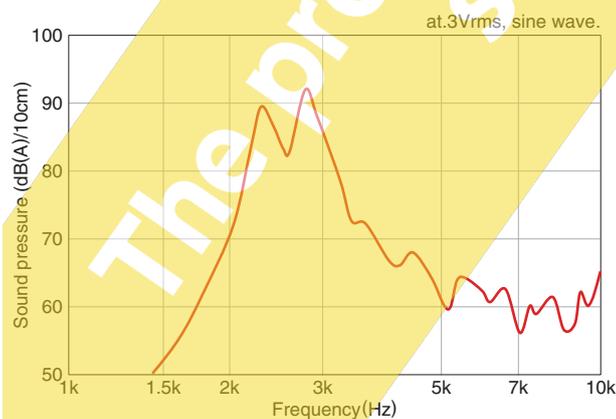

#### SQUARE WAVE DRIVE

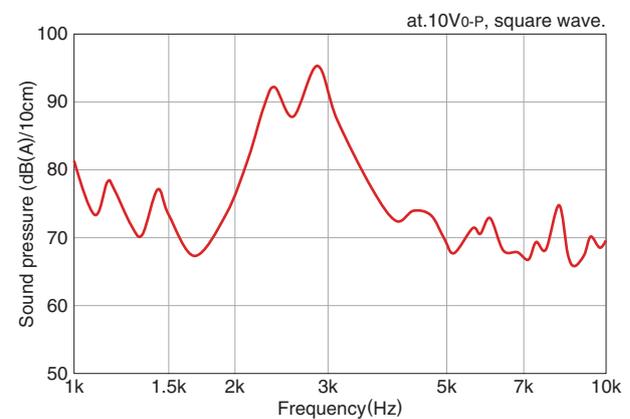

⚠ Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use.  
Please note that the contents may change without any prior notice due to reasons such as upgrading.