

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT
DATE			

General information:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Salt spray test 800h
- 3.Hygrothermal test 240h Temperature 60±2℃ Humidity 100% Basis ISO4628
- 4.Protection IP65
- 5.Operating temperature: -40℃~+125℃
- 6.The clamping fit can't be loosened
- 7.RoHS2.0 Compliance
- 8.Undimensioned Tolerances:

Pitch Range		In mm		Nominal Dimension Range		mm	
Over	TO	Over	TO	Over	TO	Over	TO
6	10	30	60	100	150	0.1/10	
10	24	30	60	100	150	<	
±0.15±0.20±0.30±0.30±0.50±0.70±1.00±1.30							±2°

Material:

NO.	Insulator	Material science	Number
1	Sealing element	NPR	1pcs
2	Housing	ACD12	1pcs
3	Rivet	Iron	2pcs
4	Buckle	Iron	1pcs
5	Bolt	Iron	1pcs
6	Spring	SUS304	1pcs
7	Cover	ADC12	1pcs





HOW TO ORDER:


S3A-BM-1L.M-MC

- Cover-MC: Metal cover
- PC: Plastic cover
- Locking lever—1L: 1 levers(plastic)
- 2L: 2 levers(plastic)
- 1L.M: 1 levers(Metal)
- 2L.M: 2 levers(Metal)

- Housing type—BM: Bulkhead mounted
- SM: Surface mounted
- SMH: Surface mounted—high construction
- CC: Cable to cable
- CCH: Cable to cable high construction

- Series—S3A: 3A Compact type
- S10A: 10A Compact type
- S16A: 16A Compact type
- S32A: 32A Compact type

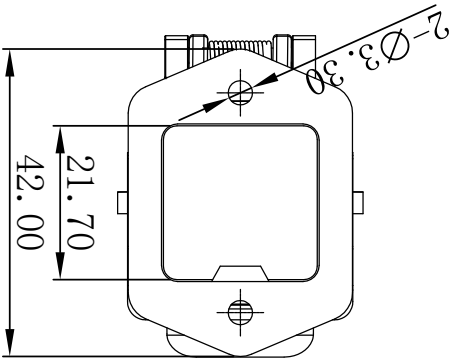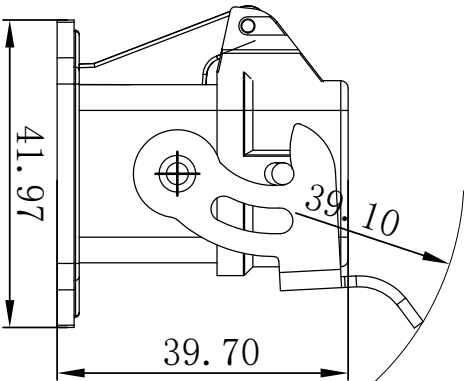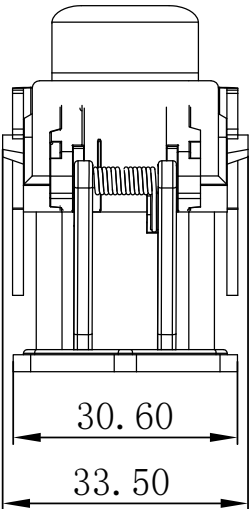

DETACHED LISTS			
THIS DRAWING IS A CONTROLLED DOCUMENT.		NINGBO SUPU ELECTRONICS CO., LTD. 宁波速普电子有限公司	
APVD:		NAME:	
CHK:		S3A-BM-1L.M-MC	
DWN: TIANCHIO4/25/19	DRAWING NO.: SPT20129002	REV	TO-1
	CUSTOMER COPY		
THIRD ANGLE PROJECTION	SUPU retains the right of product modification and engineering change or fine design		
			
	DO NOT SCALE DRAWING	SHEET	1/1
		SCALE	1:1