


VLS252012ET-1R5N

Applications	 Commercial Grade
Feature	<div>Wire Wound</div> <div>Wire Wound</div> <div>Shield</div> <div>Magnetic Shield</div> <div>Ferrite Core</div> <div>Ferrite Core</div>
Series	VLS-E Series / VLS252012E Type
Status	PROD




Size	
Length(L)	2.50mm +/-0.10mm
Width(W)	2.00mm +/-0.10mm
Thickness(T)	1.20mm Max.

Electrical Characteristics	
Inductance	1.5uH +/-30% at 1MHz
Rated Current	2A
Rated Current (L Change) [Typ.]	2A (30% Down)
Rated Current (L Change) [Max.]	1.8A (30% Down)
Rated Current (Temperature Rise) [Typ.]	1.45A (40degC Rise)
DC Resistance [Nom.]	105mΩ
DC Resistance [Max.]	126mΩ


Other	
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105degC
Soldering Method	Reflow
AEC Q200	No
Packing	Blister (Plastic)Taping [180mm Reel]
Package Quantity	2000 Pcs Min.
Weight	0.024g

VLS252012ET-1R5N


Characteristic Graphs

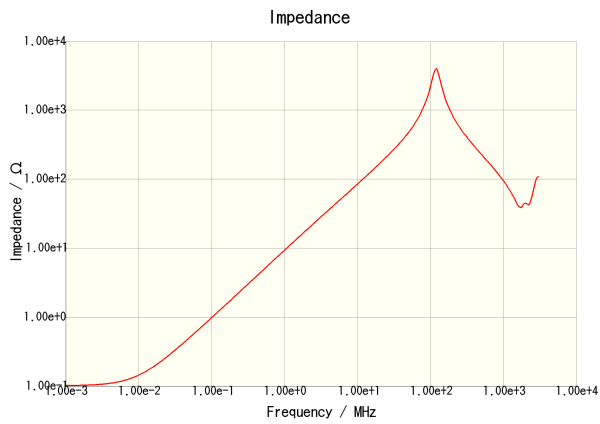


VLS252012ET-1R5N

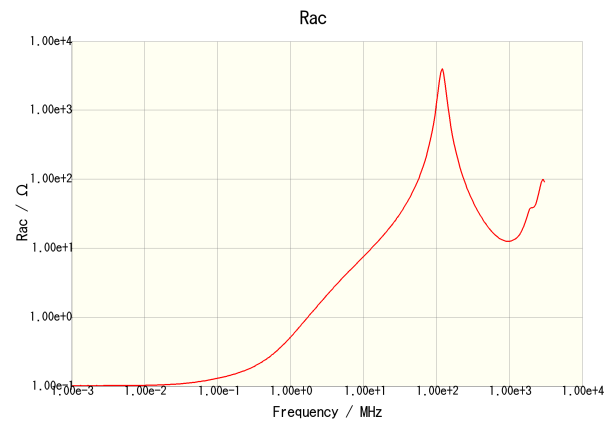

VLS252012ET-1R5N

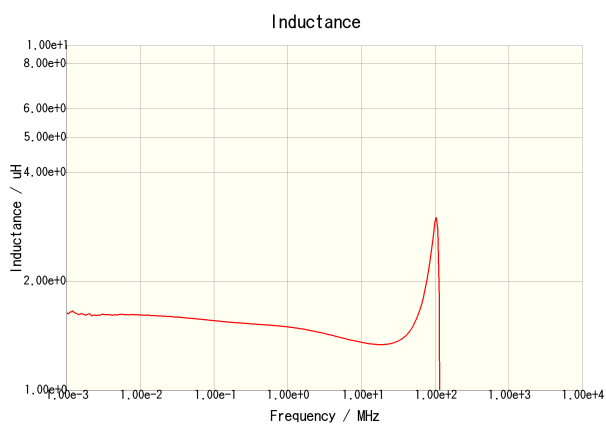


VLS252012ET-1R5N

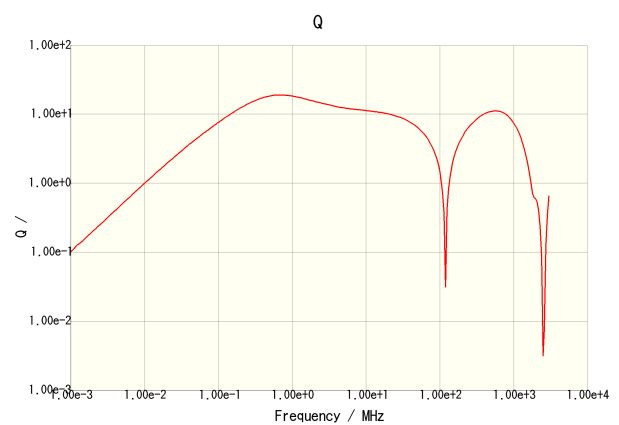


VLS252012ET-1R5N

VLS252012ET-1R5N

Characteristic Graphs

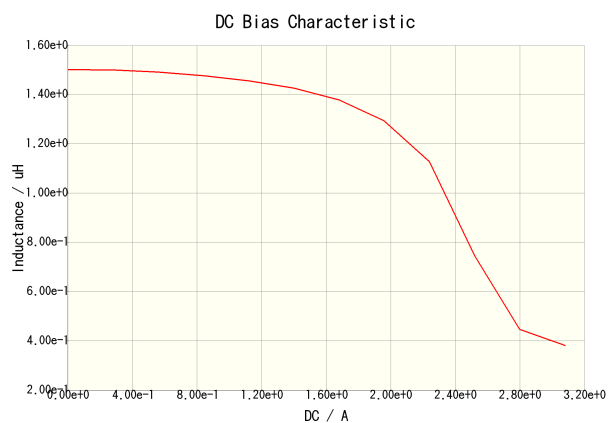


VLS252012ET-1R5N(Amb. Temp. = 20degc)

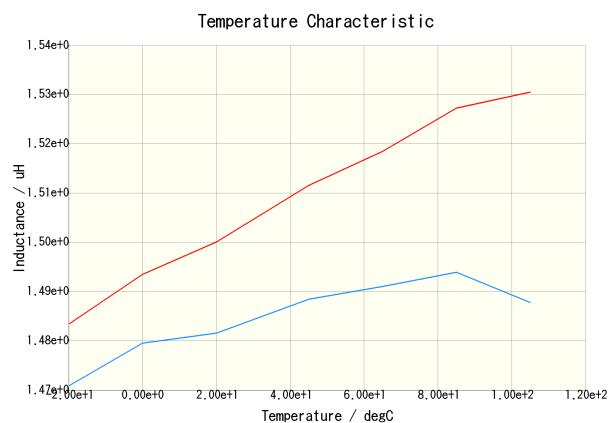

VLS252012ET-1R5N(DC = 0A)

VLS252012ET-1R5N(DC = 0.725A)

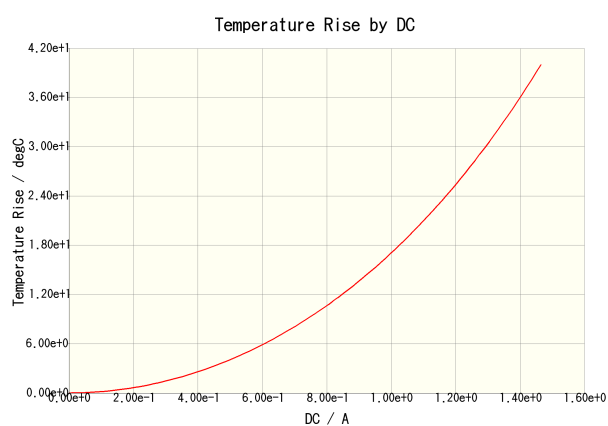

VLS252012ET-1R5N(Amb. Temp. = 20degc)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TDK:](#)

[VLS252012ET-R47N](#) [VLS252012ET-1R0N](#) [VLS252012ET-1R5N](#) [VLS252012ET-2R2M](#) [VLS252012ET-3R3M](#)
[VLS252012ET-4R7M](#) [VLS252012ET-6R8M](#) [VLS252012ET-100M](#)