

RoHS

Specification

规格书

Customer Name:

客户名称: _____

Customer P/N:

客户品号: _____

Factory P/N:

公司品号: GCS05611AYG21-4.0

Sending Date:

送样日期: _____

Client approval 客户审核			Goozo approval 鸿利国泽审核		
Approval 核准	Audit 确认	Confirmation 制作	Approval 核准	Audit 确认	Confirmation 制作
			潘桂建	赵丹	夏昊
<input type="checkbox"/> Qualified 接受		<input type="checkbox"/> Disqualified 不接受	DATE: 日期:		

Address: Dangui Road NO. 1 Dantu Area Zhenjiang City Jiangsu Province

地址: 江苏省镇江市丹徒区丹桂路 1 号

Tel/电话: 0511-88786599

Fax/传真: 0511-88786599

Web/网址: www.goozo.com.cn

注:

- 1.此规格书以中英文方式书写,若有冲突以中文版本为准文本.
- 2.此规格书的最终解释权归属江苏鸿利国泽光电科技有限公司



1、Description:

1. 14.2mm (0.56") Single digital displays series,
2. Yellow green emitting, common cathode , gray face and white segment
3. low power consumption, long life span
4. Complied With RoHS Directive

2、Purpose:

It is widely used in all kinds of household appliances, instruments and meters.

3、Absolute Maximum Ratings (Temperature=25°C):


Parameter	Symbol	Rating	Unit
Forward Current	I_{FM}/seg	20	mA
Reverse Voltage	V_{RM}/seg	5	V
Operating Temperature	T_{OPR}	-25 ~ +60	°C
Storage Temperature	T_{stg}	-25 ~ +85	°C
Pulse Forward Current	$I_{FM (IM)}/seg$	60	mA

* Note: Pulse Width $\leq 0.1ms$, Duty $\leq 1/10$

4、Electro-Optical Characteristics (Temperature=25°C):


Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Reverse Current	I_R	$V_R=5V$	---	---	10	μA
Forward Voltage	V_F	$I_F=20mA$	2.0	2.2	2.4	V
Peak Wavelength	λ_P		---	573	---	nm
Dominant Wavelength	λ_d				569	nm
Spectrum Radiation Bandwidth	$\Delta\lambda$		---	20	---	nm
Luminous Intensity	I_V		65	70	75	mcd

5、 Outline Dimension:





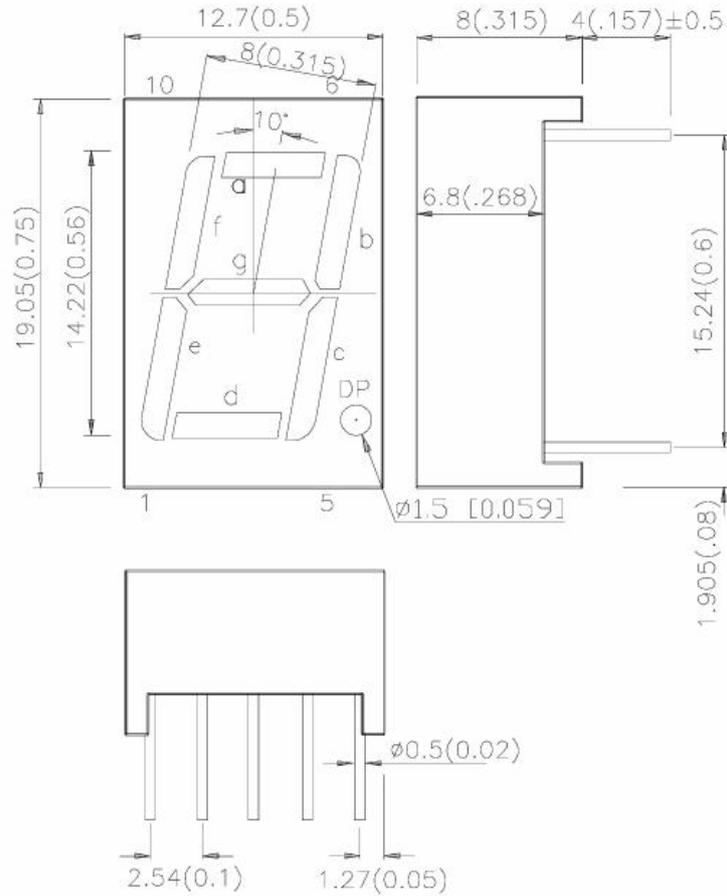


Unmarked tolerance :
 ±0.25
 Unit : mm

6、 Circuit Diagram:

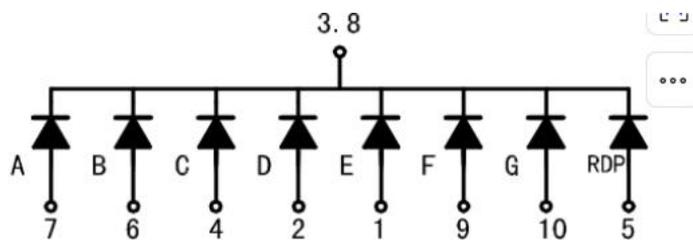

7、Typical Characteristics Curves:

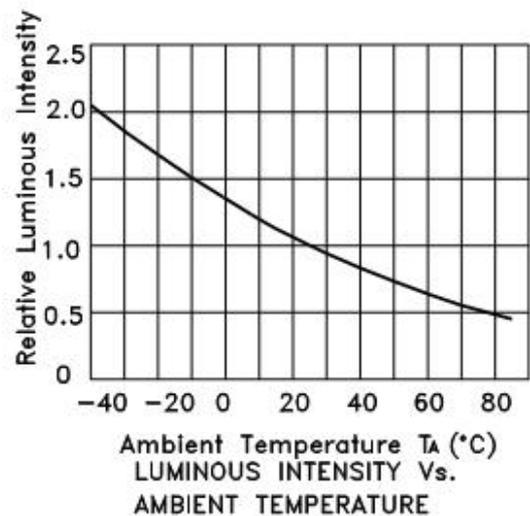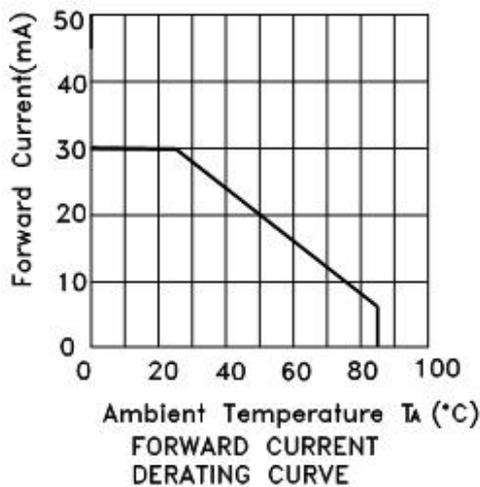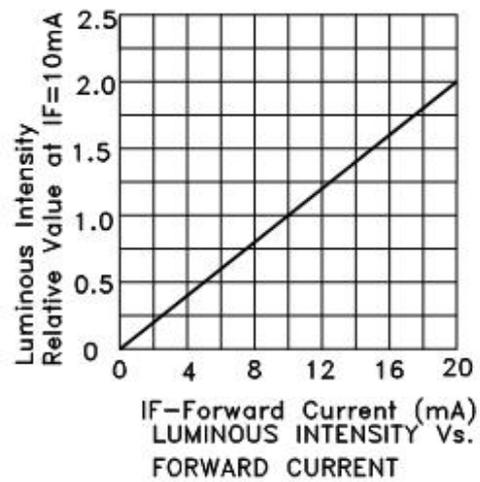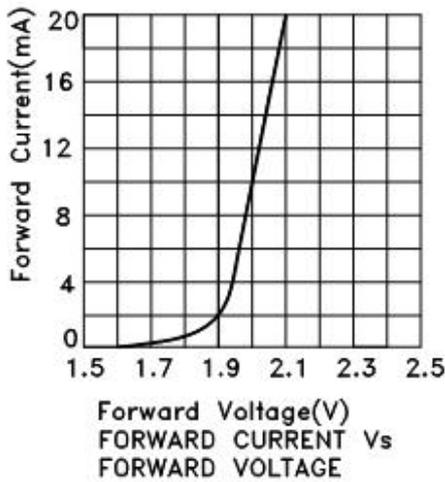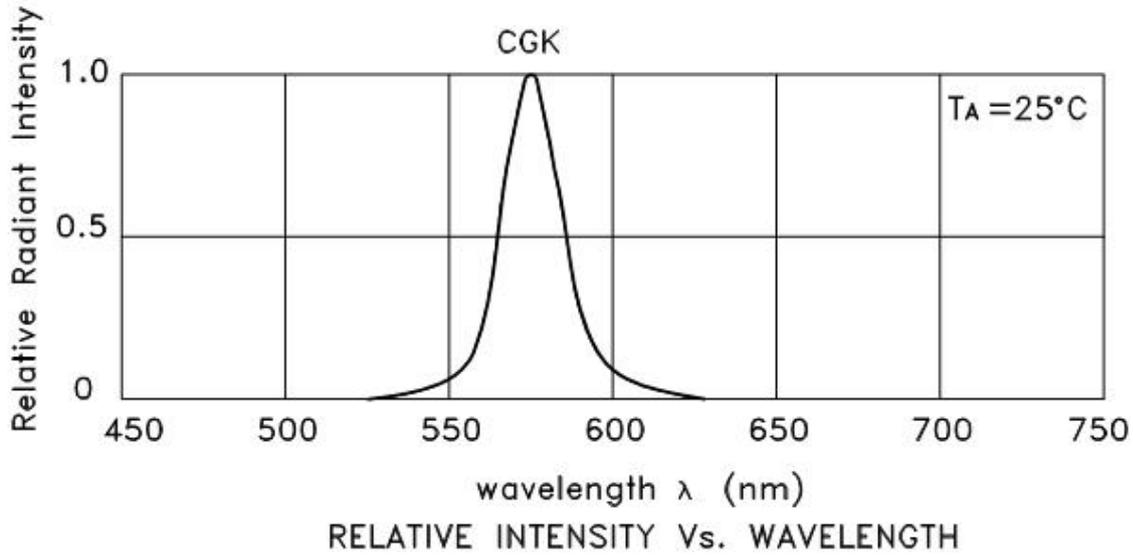

8、Precautions:

- ✧ Static electricity: This product is based on LED design, LED is sensitive to static electricity, static electricity and surge will cause LED characteristics to change, such as forward voltage reduction, etc., if the situation is serious, or even destroy products. So do not touch the pin directly. When installing or using, the relevant equipment and machine should be properly grounded, and other measures must be taken to prevent static electricity and surge. The use of antistatic bracelets, anti-static mats, antistatic work clothes, working shoes, gloves and anti-static containers are effective measures to prevent static electricity and surge.
- ✧ Storage: attention should be paid to preservation. If the preservation condition is not good, the adhesion force between the reflecting film and the reflecting cavity will be reduced. The recommended storage conditions are: temperature (25 ± 10), humidity (65 ± 20)%RH.
- ✧ Welding: the welding temperature is 260 and 5 C, the welding time is less than 3 seconds, the welding power is less than 30W, and the welding point should be more than 1.6mm.