

RoHS

Specification

规格书

Customer Name:

客户名称: _____

Customer P/N:

客户品号: _____

Factory P/N:

公司品号: GCS08021BYG-21-4.0

Sending Date:

送样日期: _____

Client approval 客户审核			Goozo approval 鸿利国泽审核		
Approval 核准	Audit 确认	Confirmation 制作	Approval 核准	Audit 确认	Confirmation 制作
			潘桂建	赵丹	夏昊
<input type="checkbox"/> Qualified 接受	<input type="checkbox"/> Disqualified 不接受		DATE: 日期:		

Address: Dangui Road NO. 1 Dantu Area Zhenjiang City Jiangsu Province

地址: 江苏省镇江市丹徒区丹桂路1号

Tel/电话: 0511-88786599

Fax/传真: 0511-88786599

Web/网址: www.goozo.com.cn

注:

- 1.此规格书以中英文方式书写,若有冲突以中文版本为准文本.
- 2.此规格书的最终解释权归属江苏鸿利国泽光电科技有限公司






ATTENTION 注意
 OBSERVE PRECAUTIONS
 FOR HANDLING
 ELECTROSTATIC
 DISCHARGE
 SENSITIVE
 DEVICES

Features


- 20.32mm (0.8") dual digital display series, common anode, gray face and white segment
- Standard brightness.
- Low current operation.
- Excellent character appearance.
- Easy mounting on P.C.boards or sockets.
- PIN length 4.0mm above the reflector

Package Dimensions

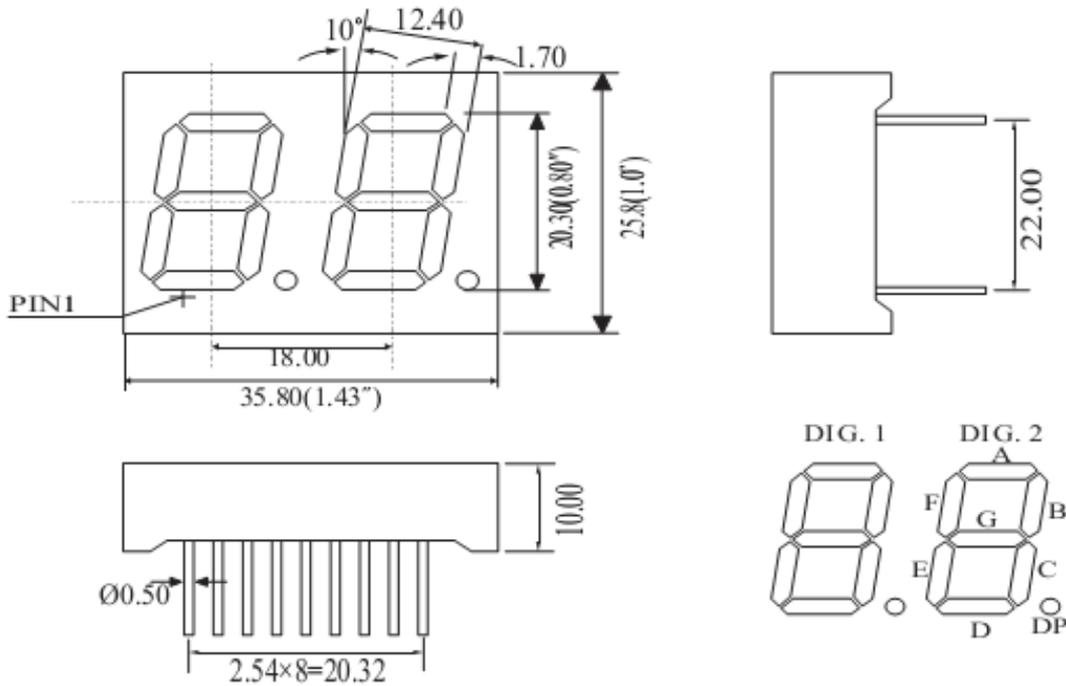

Unmarked tolerance: ± 0.25
 Unit : mm

Internal Circuit Diagram

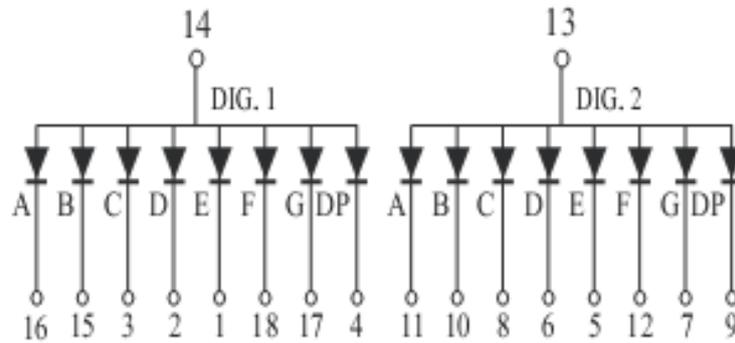

Absolute Maximum Rating






Item 项目	Symbol 符号	Value 数值	Unit 单位
反向电压 Reverse Voltage	VR	5	V/Seg
正向电流 Forward Current	IF	20	mA/Seg
峰值电流 (0.1ms) Peak Faward current(1/10 Duty Cycle)	IPEAK	120	mA/Seg
功耗 Power Dissipation	PA	45	mW/Seg

* Note: Pulse Width ≤ 0.1ms, Duty ≤ 1/10

Typical Optical/ Electrical Characteristics Ta=25°C

Item/项目	Symbol/ 符号	Condition/ 条件	Min. 最小值	Typ. 典型值	Max. 最大值	Unit 单位
Reverse Current 反向电流	IR	VR=5V	---	---	10	μA
Luminous Intensity/光强	Iv	IF=20mA	40	45	50	mcd
Forward Voltage/正向电压	VF		2.0	2.25	2.4	V
Peak Wavelength/峰值波长	λp		---	573	---	nm
Dominant Wavelength/主波长	λd				569	nm
Spectrum Radiation Bandwidth/ 半波宽度	Δλ			--	20	--

■ Typical Characteristics Curves

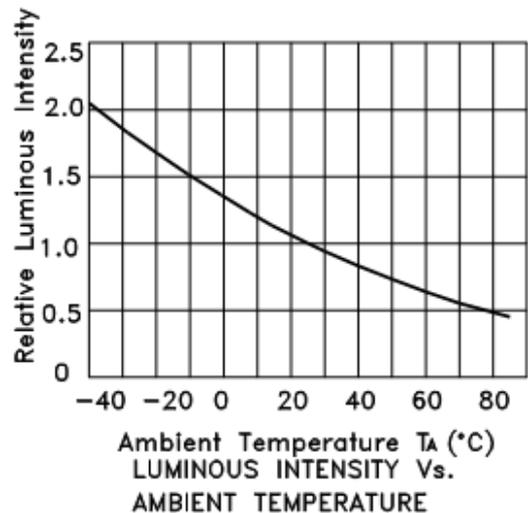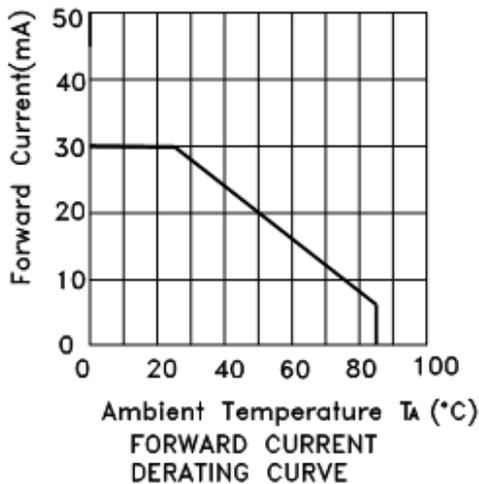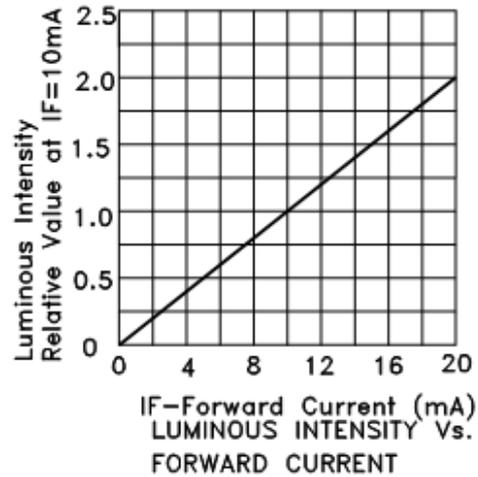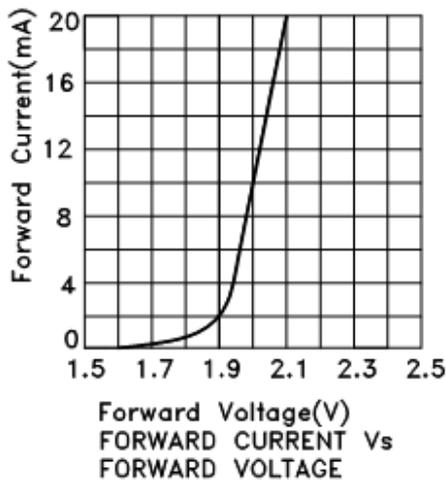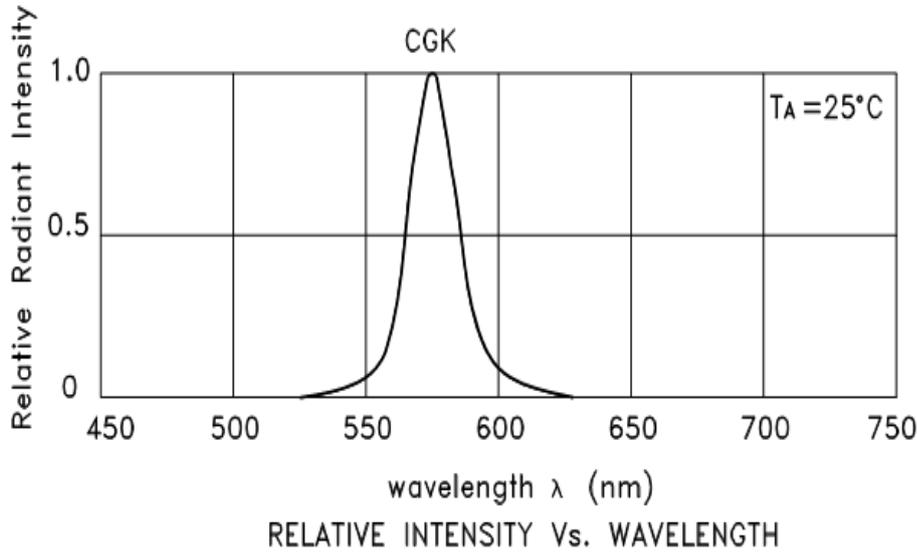

■ Guideline for Soldering

Static electricity: This product is based on LED design, LED is sensitive to static electricity, static electricity and surge will cause LED characteristics to change, such as forward voltage reduction, etc., if the situation is serious, or even destroy products. So do not touch the pin directly. When installing or using, the relevant equipment and machine should be properly grounded, and other measures must be taken to prevent static electricity and surge. The use of antistatic bracelets, anti-static mats, antistatic work clothes, working shoes, gloves and anti-static containers are effective measures to prevent static electricity and surge.

Storage: attention should be paid to preservation. If the preservation condition is not good, the adhesion force between the reflecting film and the reflecting cavity will be reduced. The recommended storage conditions are: temperature (25 ± 10), humidity (65 ± 20)%RH.

Welding: the welding temperature is 260 and 5 C, the welding time is less than 3 seconds, the welding power is less than 30W, and the welding point should be more than 1.6mm.