


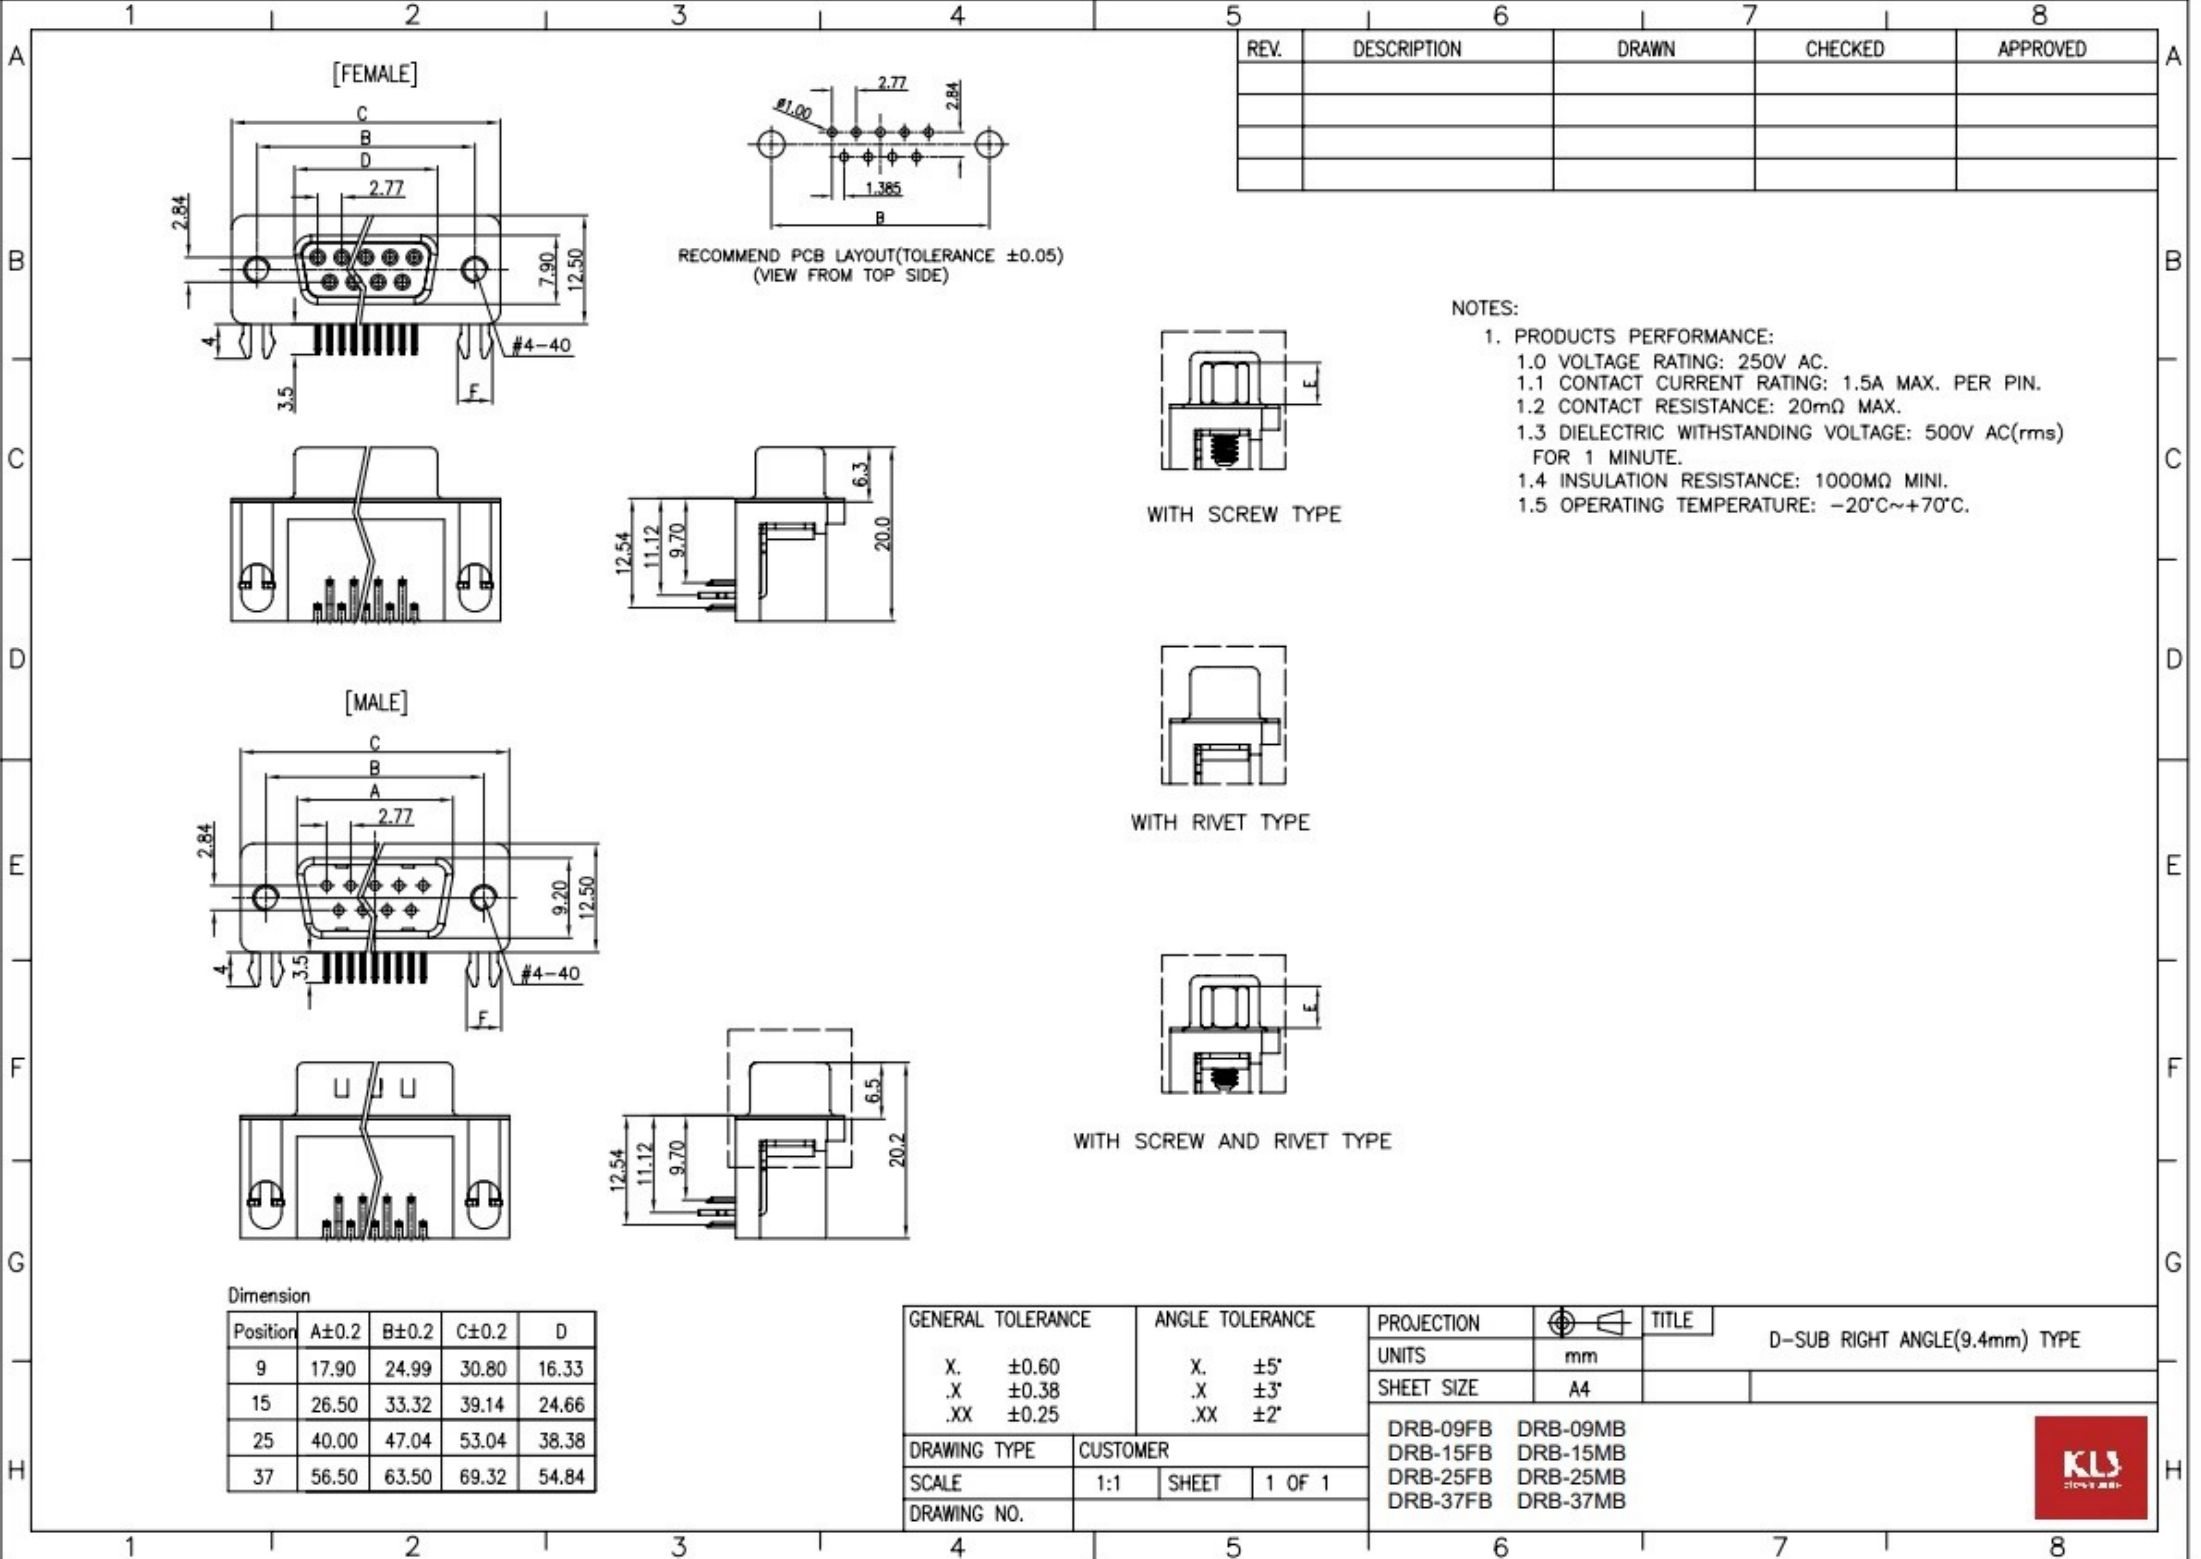

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED

- NOTES:
- 1. PRODUCTS PERFORMANCE:
 - 1.0 VOLTAGE RATING: 250V AC.
 - 1.1 CONTACT CURRENT RATING: 1.5A MAX. PER PIN.
 - 1.2 CONTACT RESISTANCE: 20mΩ MAX.
 - 1.3 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - 1.4 INSULATION RESISTANCE: 1000MΩ MINI.
 - 1.5 OPERATING TEMPERATURE: -20°C~+70°C.

Dimension				
Position	A±0.2	B±0.2	C±0.2	D
9	17.90	24.99	30.80	16.33
15	26.50	33.32	39.14	24.66
25	40.00	47.04	53.04	38.38
37	56.50	63.50	69.32	54.84

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.			

PROJECTION	TITLE	D-SUB RIGHT ANGLE(9.4mm) TYPE	
UNITS	mm		
SHEET SIZE	A4		
DRB-09FB	DRB-09MB		
DRB-15FB	DRB-15MB		
DRB-25FB	DRB-25MB		
DRB-37FB	DRB-37MB		

