


Data sheet

Commercial Art.No.: 5D.203.4055.0

connector disconnect terminal WTPN 2.5 TKG

connector disconnect terminal WTPN 2.5 TKG rated voltage 400 V, rated current 6 A, push-In connection//true, number of levels 1, number of clamp positions per level 2, nominal cross section 2.5 mm², connectable conductor cross section fine stranded without cable end sleeve 0,14mm² - 2,5mm², mounting method DIN rail (top hat rail), color grey, width/grid dimension 5.1 mm, inflammability class of insulation material acc. with ul94 V0

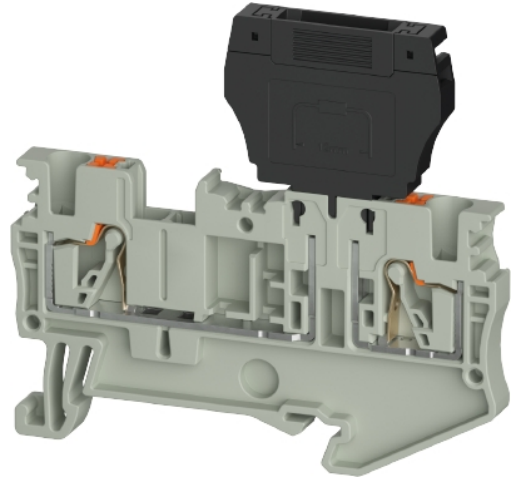

Commercial Art.No.	5D.203.4055.0
EAN	4049088718717
Order Unit	100

certificates / approvals



Technical data

general

nominal cross section	2.5 mm ²
color	grey
number of levels	1
number of clamp positions per level	2
width/grid dimension	5.1 mm
insulating housing	PA
inflammability class of insulation material acc. with UL94	V0
mounting method	DIN rail (top hat rail)

technical data

rated current	6 A
rated voltage	400 V
rated impulse voltage	6 kV
pollution degree	3
closing plate required	yes
type of insulation material	thermoplastic
length	61.7 mm
width	5.1 mm

connection data

connection type	push-In connection//true
connection type 1	plug-in connection
minimum cross section solid	0.14 mm ²

maximum cross section solid	4 mm ²
minimum cross section fine stranded	0.14 mm ²
maximum cross section fine stranded	2.5 mm ²
minumum conductor cross section (flex., stranded) with cable end sleeve	0.25 mm ²
maximum conductor cross section (flex., stranded) with cable end sleeve	2.5 mm ²
wire strip length	10 mm

technical data UL/CSA

cross section UL	26-12 AWG
voltage UL	300 V
current factory wiring	6 A
current field wiring	6 A
cross section CSA	26-12 AWG
voltage CSA	300 V
current CSA	6 A

classification

ECLASS 11	
ECLASS 8.1	27141120
ETIM 9.0	EC000902
ETIM 8.0	EC000897
ETIM 7.0	EC000897
ETIM 6.0	EC000897


product compliance

REACH-SVHC conformity status	compliant
------------------------------	-----------

Accessories

Commercial Art.No.:	Article-type description:	Description:
0D.203.3227.5	jumper bar IVB WTPN 2,5-2	jumper bar IVB WTPN 2,5-2 modular spacing 5.1 mm, insulated yes, number of poles 2, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.203.3327.5	jumper bar IVB WTPN 2,5-3	jumper bar IVB WTPN 2,5-3 modular spacing 5.1 mm, insulated yes, number of poles 3, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.203.3427.5	jumper bar IVB WTPN 2,5-4	jumper bar IVB WTPN 2,5-4 modular spacing 5.1 mm, insulated yes, number of poles 4, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.203.3527.5	jumper bar IVB WTPN 2,5-5	jumper bar IVB WTPN 2,5-5 modular spacing 5.1 mm, insulated yes, number of poles 5, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.203.4027.5	jumper bar IVB WTPN 2,5-10	jumper bar IVB WTPN 2,5-10 modular spacing 5.1 mm, insulated yes, number of poles 10, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.203.5027.5	jumper bar IVB WTPN 2,5-20	jumper bar IVB WTPN 2,5-20 modular spacing 5.1 mm, insulated yes, number of poles 20, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0

0D.203.5427.5	jumper bar IVB WTPN 2.5 500T	jumper bar IVB WTPN 2.5 500T modular spacing 5.1 mm, insulated yes, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.203.8055.5	test plug PS 2.5	test plug PS 2.5 color red
0D.203.8155.5	spacer SPS 2.5	spacer SPS 2.5 color red
0D.202.7281.0	marking strips WML 9.8/60	marking strips WML 9.8/60 color white
0D.202.7381.0	marking strips WML 7.4/60	marking strips WML 7.4/60 color white
0D.203.7056.0	marking plate WMP 5,10-10	marking plate WMP 5,10-10 modular spacing 5.1 mm, color white
0D.203.7156.0	marking plate WMP 5,10-5,8	marking plate WMP 5,10-5,8 modular spacing 5.1 mm, color white

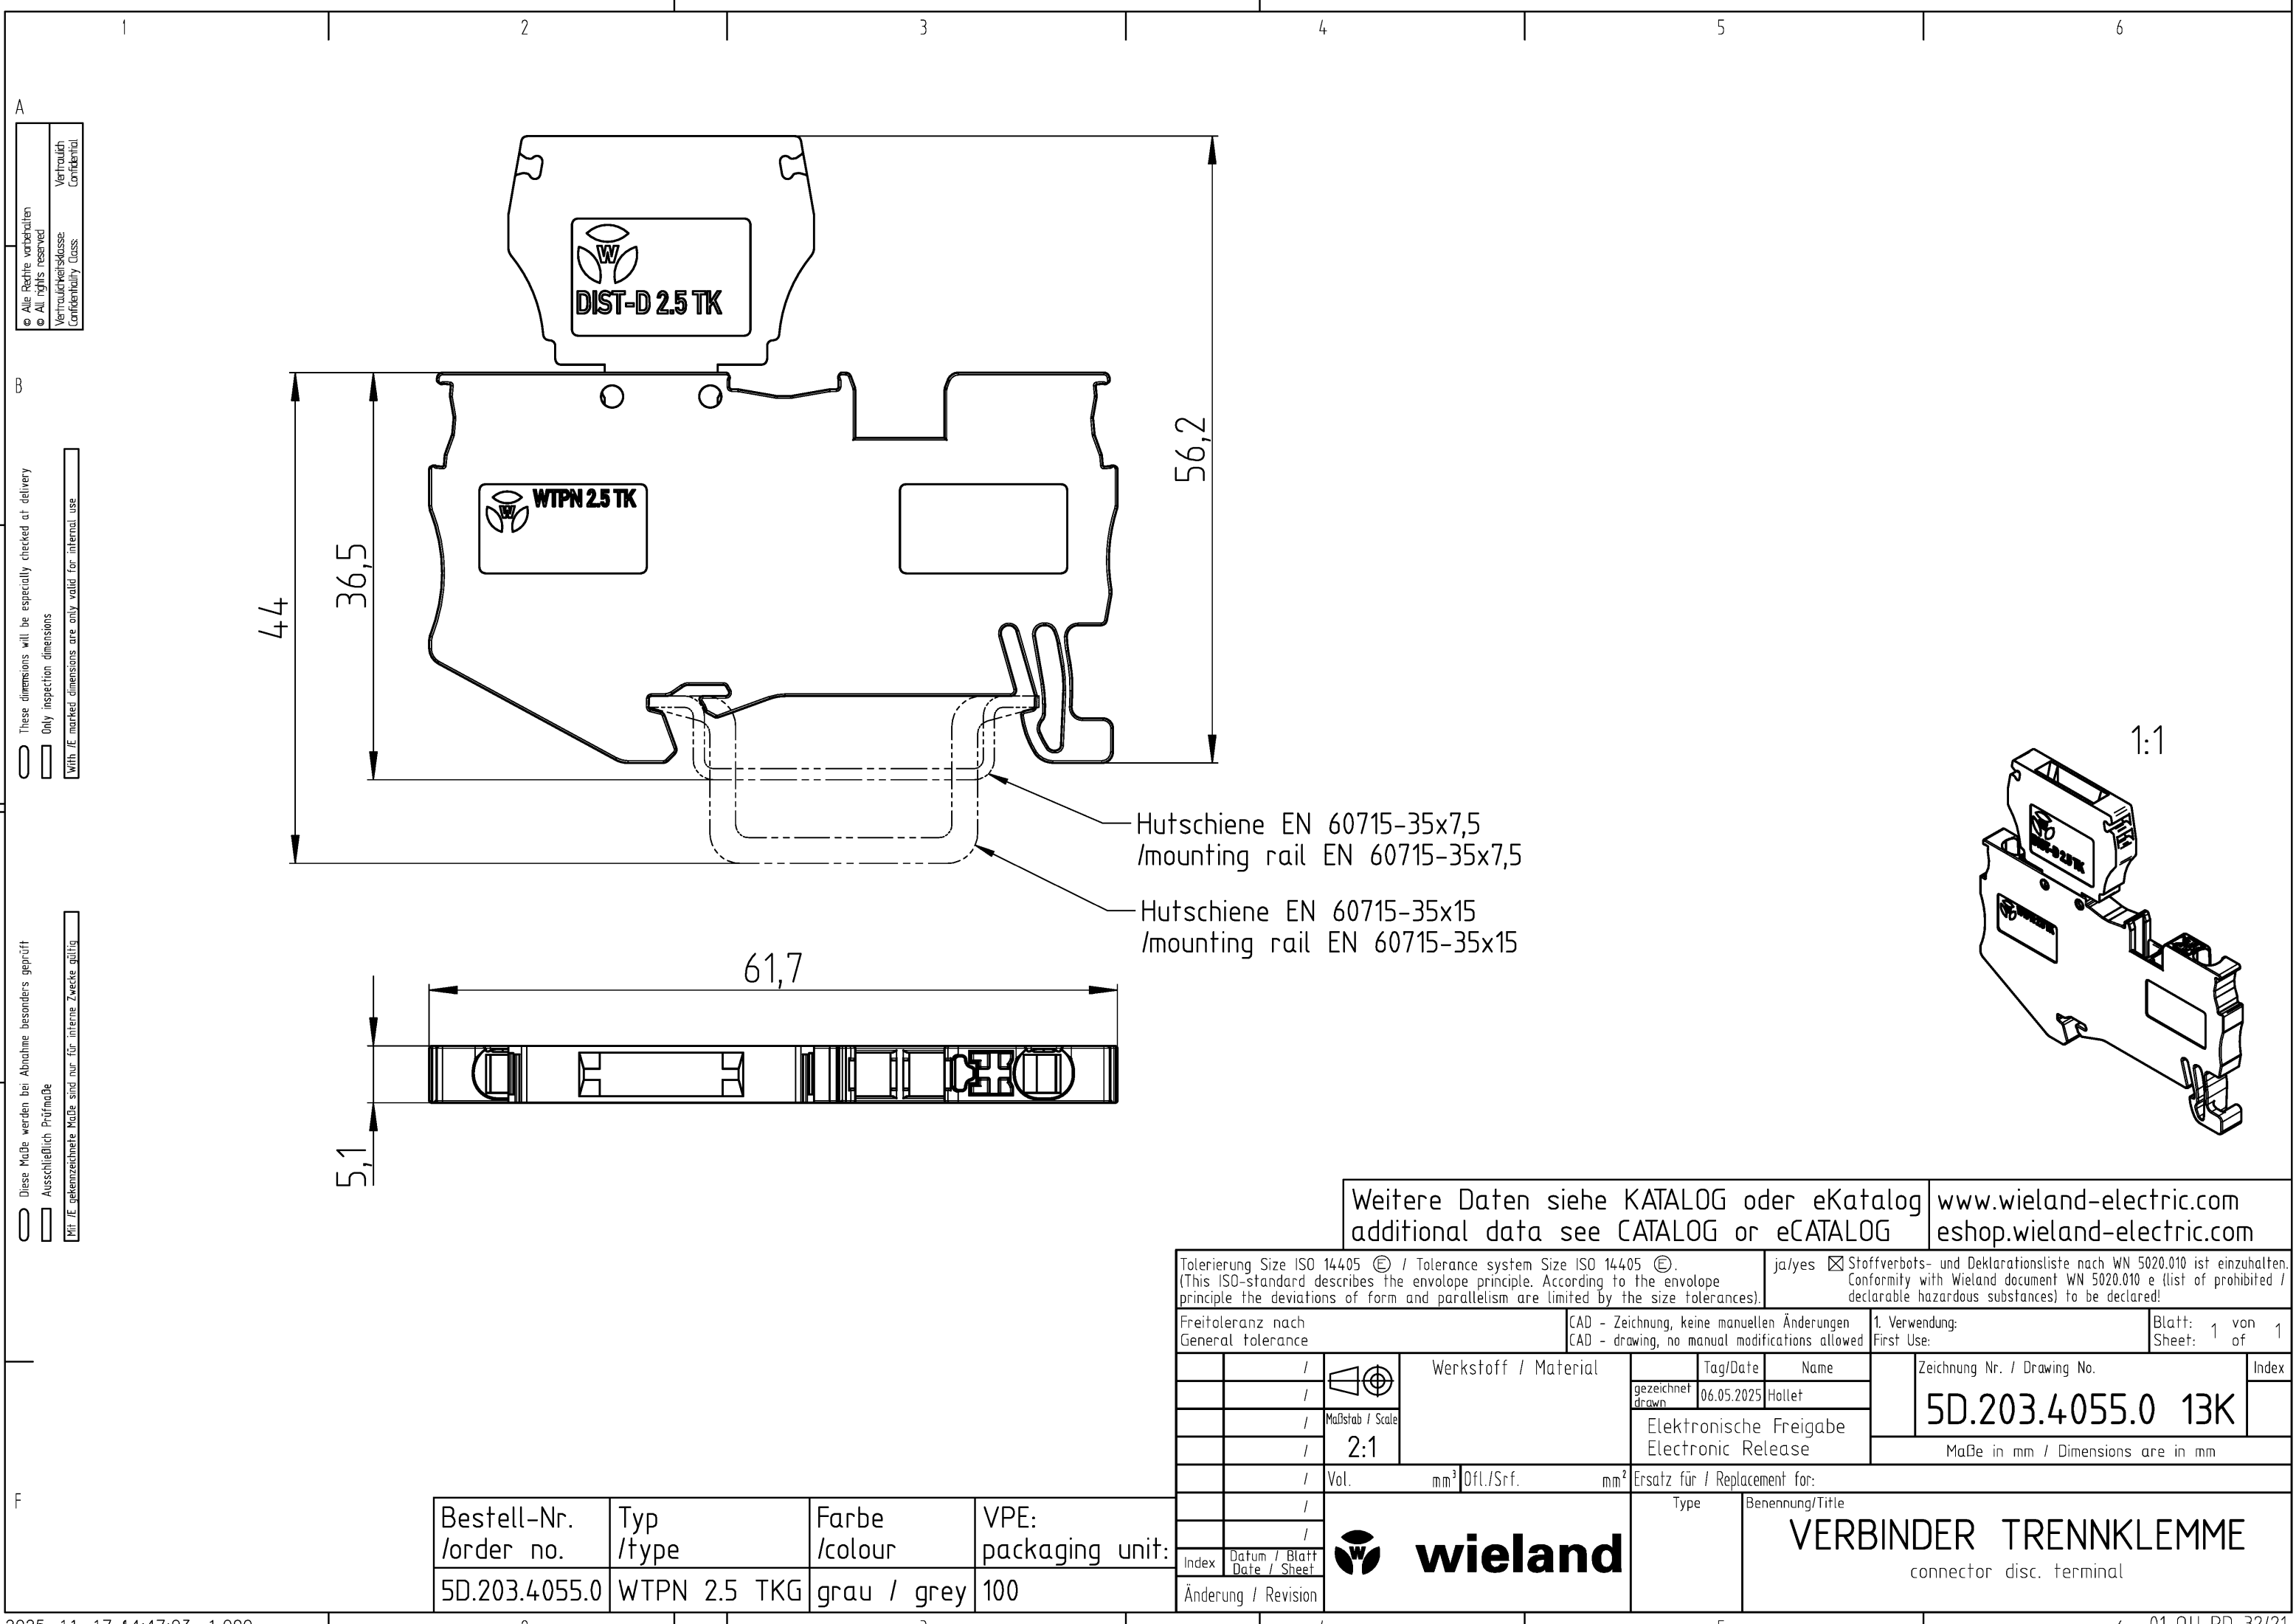

A
Alle Rechte vorbehalten
All rights reserved
Vertraulich
Confidential

B
These dimensions will be especially checked at delivery
Only inspection dimensions
With /E marked dimensions are only valid for internal use

C
Diese Maße werden bei Abnahme besonders geprüft
Ausschließlich Prüfmaße
Mit /E gekennzeichnete Maße sind nur für interne Zwecke gültig

F
Bestell-Nr.
/order no.
5D.203.4055.0
Typ
/type
WTPN 2.5 TKG
Farbe
/colour
grau / grey
VPE:
packaging unit:
100

Weitere Daten siehe KATALOG oder eKatalog
additional data see CATALOG or eCATALOG
www.wieland-electric.com
eshop.wieland-electric.com

Tolerierung Size ISO 14405 © / Tolerance system Size ISO 14405 ©. (This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).					ja/yes ☒ Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten. Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!				
Freitoleranz nach General tolerance			CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed			1. Verwendung: First Use:		Blatt: 1 von 1 Sheet: 1 of 1	
	/		Werkstoff / Material		Tag/Date	Name		Zeichnung Nr. / Drawing No. 5D.203.4055.0 13K Maße in mm / Dimensions are in mm	Index
	/			gezeichnet drawn	06.05.2025	Hollet			
	/			Maßstab / Scale		Elektronische Freigabe Electronic Release			
	/			2:1					
	/	Vol. mm³		OfL./Srf. mm²		Ersatz für / Replacement for:			
	/		wieland	Type	Benennung/Title				
	/			VERBINDER TRENNKLEMME					
	/			connector disc. terminal					
Index	Datum / Blatt Date / Sheet								
Änderung / Revision									