


Data sheet

Commercial Art.No.: 5D.203.4155.0

cutting clamp WTPN 2.5 TK

cutting clamp WTPN 2.5 TK rated voltage 400 V, rated current 20 A, push-In connection//true, number of levels 1, number of clamp positions per level 2, nominal cross section 2.5 mm², connectable conductor cross section fine stranded without cable end sleeve 0,14mm² - 2,5mm², mounting method DIN rail (top hat rail), color grey, width/grid dimension 5.1 mm, inflammability class of insulation material acc. with UL94 V0

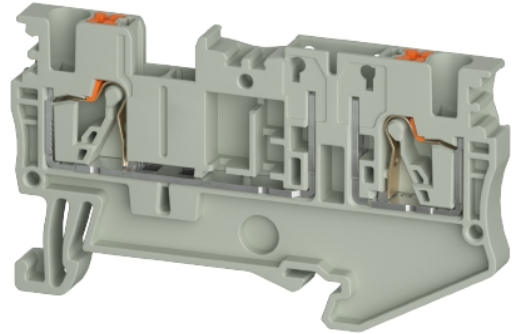

Commercial Art.No.	5D.203.4155.0
EAN	4049088718724
Order Unit	100

certificates / approvals



Technical data

general

nominal cross section	2.5 mm ²
color	grey
number of levels	1
number of clamp positions per level	2
width/grid dimension	5.1 mm
insulating housing	PA
inflammability class of insulation material acc. with UL94	V0
mounting method	DIN rail (top hat rail)

technical data

rated current	20 A
rated voltage	400 V
rated impulse voltage	6 kV
pollution degree	3
closing plate required	yes
type of insulation material	thermoplastic
length	61.7 mm
width	5.1 mm

connection data

connection type	push-In connection//true
connection type 1	plug-in connection
minimum cross section solid	0.14 mm ²
maximum cross section solid	4 mm ²
minimum cross section fine stranded	0.14 mm ²
maximum cross section fine stranded	2.5 mm ²

minumum conductor cross section (flex., stranded) with cable end sleeve	0.25 mm ²
maximum conductor cross section (flex., stranded) with cable end sleeve	2.5 mm ²
wire strip length	10 mm

technical data UL/CSA

cross section UL	22-12 AWG
voltage UL	300 V
current factory wiring	18 A
current field wiring	18 A
cross section CSA	26-12 AWG
voltage CSA	300 V
current CSA	18 A

classification

ECLASS 11	
ECLASS 8.1	27141120
ETIM 9.0	EC000902
ETIM 8.0	EC000897
ETIM 7.0	EC000897
ETIM 6.0	EC000897


product compliance

REACH-SVHC conformity status	compliant
------------------------------	-----------

Accessories

Commercial Art.No.:	Article-type description:	Description:
0D.203.3227.5	jumper bar IVB WTPN 2,5-2	jumper bar IVB WTPN 2,5-2 modular spacing 5.1 mm, insulated yes, number of poles 2, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.203.3327.5	jumper bar IVB WTPN 2,5-3	jumper bar IVB WTPN 2,5-3 modular spacing 5.1 mm, insulated yes, number of poles 3, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.203.3427.5	jumper bar IVB WTPN 2,5-4	jumper bar IVB WTPN 2,5-4 modular spacing 5.1 mm, insulated yes, number of poles 4, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.203.3527.5	jumper bar IVB WTPN 2,5-5	jumper bar IVB WTPN 2,5-5 modular spacing 5.1 mm, insulated yes, number of poles 5, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.203.4027.5	jumper bar IVB WTPN 2,5-10	jumper bar IVB WTPN 2,5-10 modular spacing 5.1 mm, insulated yes, number of poles 10, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.203.5027.5	jumper bar IVB WTPN 2,5-20	jumper bar IVB WTPN 2,5-20 modular spacing 5.1 mm, insulated yes, number of poles 20, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.203.5427.5	jumper bar IVB WTPN 2.5 500T	jumper bar IVB WTPN 2.5 500T modular spacing 5.1 mm, insulated yes, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.203.8055.5	test plug PS 2.5	test plug PS 2.5 color red
0D.203.8155.5	spacer SPS 2.5	spacer SPS 2.5 color red

0D.203.8555.0	diode plug DIST-D 2.5 TK	diode plug DIST-D 2.5 TK mounting method pluggable, color grey, width/grid dimension 5.1 mm
0D.203.8655.9	separating plug PTK 4	separating plug PTK 4 mounting method pluggable, color orange, width/grid dimension 3.5 mm
0D.202.7281.0	marking strips WML 9.8/60	marking strips WML 9.8/60 color white
0D.202.7381.0	marking strips WML 7.4/60	marking strips WML 7.4/60 color white
0D.203.7056.0	marking plate WMP 5,10-10	marking plate WMP 5,10-10 modular spacing 5.1 mm, color white
0D.203.7156.0	marking plate WMP 5,10-5,8	marking plate WMP 5,10-5,8 modular spacing 5.1 mm, color white

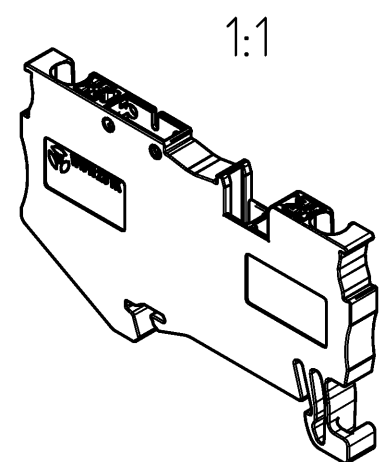

2025-11-17 14:44:45 1.000	2		3		4		5		6	01-QU-RD-32/21
---------------------------	---	--	---	--	---	--	---	--	---	----------------