


Data sheet

Commercial Art.No.: 5D.203.9655.0

earth terminal WTPN 2.5 E PE

earth terminal WTPN 2.5 E PE rated voltage 500 V, push-In connection//true, number of levels 2, number of clamp positions per level 2, nominal cross section 2.5 mm², connectable conductor cross section fine stranded without cable end sleeve 0,14mm² - 2,5mm², mounting method DIN rail (top hat rail), color green/yellow, width/grid dimension 5.1 mm, inflammability class of insulation material acc. with ul94 V0

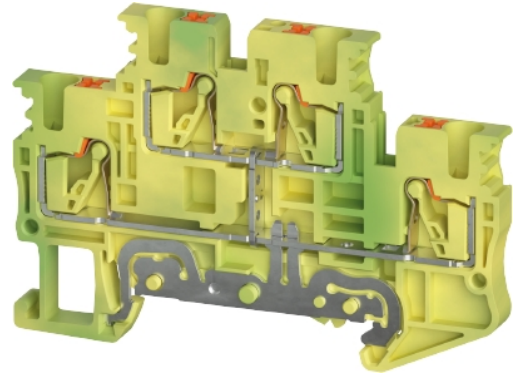

Commercial Art.No.	5D.203.9655.0
EAN	4049088706653
Order Unit	50

certificates / approvals



Technical data

general

nominal cross section	2.5 mm ²
color	green/yellow
number of levels	2
number of clamp positions per level	2
width/grid dimension	5.1 mm
insulating housing	PA
inflammability class of insulation material acc. with UL94	V0
mounting method	DIN rail (top hat rail)

technical data

rated voltage	500 V
rated impulse voltage	6 kV
pollution degree	3
closing plate required	yes
type of insulation material	thermoplastic
length	69 mm
width	5.1 mm

connection data

connection type	push-In connection//true
connection type 1	plug-in connection
minimum cross section solid	0.14 mm ²
maximum cross section solid	4 mm ²
minimum cross section fine stranded	0.14 mm ²
maximum cross section fine stranded	2.5 mm ²

minumum conductor cross section (flex., stranded) with cable end sleeve	0.25 mm ²
maximum conductor cross section (flex., stranded) with cable end sleeve	2.5 mm ²
wire strip length	10 mm

technical data UL/CSA

cross section UL	26-12 AWG
voltage UL	300 V
cross section CSA	26-12 AWG
voltage CSA	300 V

classification

ETIM 9.0	EC000901
----------	----------

product compliance

REACH-SVHC conformity status	compliant
------------------------------	-----------

Accessories

Commercial Art.No.:	Article-type description:	Description:
0D.203.8055.5	test plug PS 2.5	test plug PS 2.5 color red
0D.203.8155.5	spacer SPS 2.5	spacer SPS 2.5 color red
0D.203.2355.0	end plate APWTPN 2.5 E	
0D.202.7381.0	marking strips WML 7.4/60	marking strips WML 7.4/60 color white
0D.203.7156.0	marking plate WMP 5,10-5,8	marking plate WMP 5,10-5,8 modular spacing 5.1 mm, color white