


Data sheet

Commercial Art.No.: 5D.204.4155.0

cutting clamp WTPN 4 TK

cutting clamp WTPN 4 TK rated voltage 500 V, rated current 20 A, push-In connection//true, number of levels 1, number of clamp positions per level 1, nominal cross section 4 mm², connectable conductor cross section fine stranded without cable end sleeve 0,2mm² - 4mm², mounting method DIN rail (top hat rail), color grey, width/grid dimension 6.1 mm, inflammability class of insulation material acc. with ul94 V0

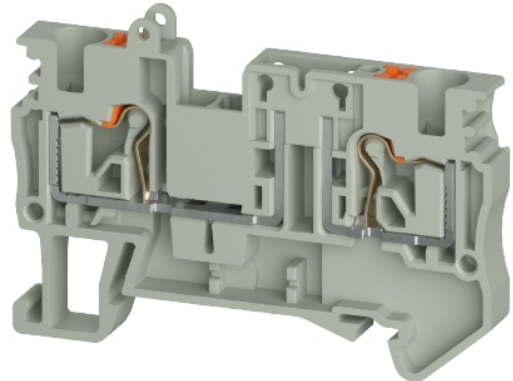

Commercial Art.No.	5D.204.4155.0
EAN	4049088718960
Order Unit	50

certificates / approvals



Technical data

general

nominal cross section	4 mm ²
color	grey
number of levels	1
number of clamp positions per level	1
width/grid dimension	6.1 mm
insulating housing	PA
inflammability class of insulation material acc. with UL94	V0
mounting method	DIN rail (top hat rail)

technical data

rated current	20 A
rated voltage	500 V
rated impulse voltage	6 kV
pollution degree	3
closing plate required	yes
type of insulation material	thermoplastic
length	57 mm
width	6.1 mm

connection data

connection type	push-In connection//true
connection type 1	plug-in connection
minimum cross section solid	0.2 mm ²
maximum cross section solid	6 mm ²
minimum cross section fine stranded	0.2 mm ²
maximum cross section fine stranded	4 mm ²

minumum conductor cross section (flex., stranded) with cable end sleeve	0.25 mm ²
maximum conductor cross section (flex., stranded) with cable end sleeve	4 mm ²
wire strip length	12 mm

technical data UL/CSA

cross section UL	24-10 AWG
voltage UL	300 V
current factory wiring	20 A
current field wiring	20 A
cross section CSA	24-10 AWG
voltage CSA	300 V
current CSA	20 A

classification

ETIM 9.0	EC000902
----------	----------

product compliance

REACH-SVHC conformity status	compliant
------------------------------	-----------

Accessories

Commercial Art.No.:	Article-type description:	Description:
0D.204.3227.5	jumper bar IVB WTPN 4-2	jumper bar IVB WTPN 4-2 modular spacing 6.1 mm, insulated yes, number of poles 2, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.204.3327.5	jumper bar IVB WTPN 4-3	jumper bar IVB WTPN 4-3 modular spacing 6.1 mm, insulated yes, number of poles 3, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.204.3427.5	jumper bar IVB WTPN 4-4	jumper bar IVB WTPN 4-4 modular spacing 6.1 mm, insulated yes, number of poles 4, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.204.3527.5	jumper bar IVB WTPN 4-5	jumper bar IVB WTPN 4-5 modular spacing 6.1 mm, insulated yes, number of poles 5, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.204.4027.5	jumper bar IVB WTPN 4-10	jumper bar IVB WTPN 4-10 modular spacing 6.1 mm, insulated yes, number of poles 10, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.204.5027.5	jumper bar IVB WTPN 4-20	jumper bar IVB WTPN 4-20 modular spacing 6.1 mm, insulated yes, number of poles 20, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.204.8055.5	test plug PS 4	test plug PS 4 color red
0D.204.8155.5	spacer SPS 4	spacer SPS 4 color red
0D.203.8555.0	diode plug DIST-D 2.5 TK	diode plug DIST-D 2.5 TK mounting method pluggable, color grey, width/grid dimension 5.1 mm
0D.203.8655.9	separating plug PTK 4	separating plug PTK 4 mounting method pluggable, color orange, width/grid dimension 3.5 mm
0D.202.7381.0	marking strips WML 7.4/60	marking strips WML 7.4/60 color white
0D.204.7156.0	marking plate WMP 6.10-5.8	marking plate WMP 6.10-5.8 modular spacing 6.1 mm, color white

1:1

Weitere Daten siehe KATALOG oder eKatalog additional data see CATALOG or eCATALOG					www.wieland-electric.com eshop.wieland-electric.com					
Tolerierung Size ISO 14405 ☺ / Tolerance system Size ISO 14405 ☺. (This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).					ja/yes ☑ Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten. Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!					
Freitoleranz nach General tolerance			CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed		1. Verwendung: First Use:			Blatt: 1 von 1 Sheet: of 1		
	/		Werkstoff / Material			Tag/Date	Name		Zeichnung Nr. / Drawing No. 5D.204.4155.0 13K	Index a
	/				gezeichnet drawn	09.05.2025	Hollet			
	/				Elektronische Freigabe Electronic Release		Maße in mm / Dimensions are in mm			
	/									
	/	Vol. mm ³		Ofl./Srf. mm ²		Ersatz für / Replacement for:				
	/	 wieland			Type		Benennung/Title TRENNKLEMME disconnect terminal			
a	01.12.2025 /									
Index	Datum / Blatt Date / Sheet									
Änderung / Revision										