


Data sheet

Commercial Art.No.: 5D.204.4655.0

fuse terminal WTPN 4 FSI

fuse terminal WTPN 4 FSI rated voltage 400 V, rated current 10 A, push-In connection//true, number of levels 1, number of clamp positions per level 2, nominal cross section 4 mm², connectable conductor cross section fine stranded without cable end sleeve 0,2mm² - 4mm², mounting method DIN rail (top hat rail), color grey, width/grid dimension 6.1 mm, inflammability class of insulation material acc. with ul94 V0

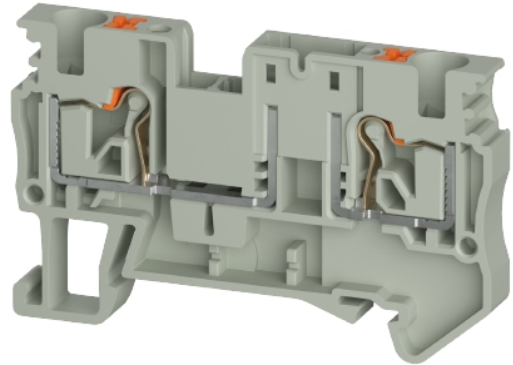

Commercial Art.No.	5D.204.4655.0
EAN	4049088719011
Order Unit	20

certificates / approvals



Technical data

general

nominal cross section	4 mm ²
color	grey
number of levels	1
number of clamp positions per level	2
width/grid dimension	6.1 mm
insulating housing	PA
inflammability class of insulation material acc. with UL94	V0
mounting method	DIN rail (top hat rail)

technical data

rated current	10 A
rated voltage	400 V
rated impulse voltage	6 kV
pollution degree	3
closing plate required	yes
type of insulation material	thermoplastic
length	57 mm
width	6.1 mm

connection data

connection type	push-In connection//true
connection type 1	plug-in connection
minimum cross section solid	0.2 mm ²
maximum cross section solid	6 mm ²
minimum cross section fine stranded	0.2 mm ²
maximum cross section fine stranded	4 mm ²

minumum conductor cross section (flex., stranded) with cable end sleeve	0.25 mm ²
maximum conductor cross section (flex., stranded) with cable end sleeve	4 mm ²
wire strip length	12 mm

technical data UL/CSA

cross section UL	24-10 AWG
voltage UL	300 V
current factory wiring	15 A
current field wiring	15 A
cross section CSA	24-10 AWG
voltage CSA	300 V
current CSA	15 A

classification


ETIM 9.0	EC000899
----------	----------

product compliance

REACH-SVHC conformity status	compliant
------------------------------	-----------


Accessories

Commercial Art.No.:	Article-type description:	Description:
0D.204.3227.5	jumper bar IVB WTPN 4-2	jumper bar IVB WTPN 4-2 modular spacing 6.1 mm, insulated yes, number of poles 2, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.204.3327.5	jumper bar IVB WTPN 4-3	jumper bar IVB WTPN 4-3 modular spacing 6.1 mm, insulated yes, number of poles 3, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.204.3427.5	jumper bar IVB WTPN 4-4	jumper bar IVB WTPN 4-4 modular spacing 6.1 mm, insulated yes, number of poles 4, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.204.3527.5	jumper bar IVB WTPN 4-5	jumper bar IVB WTPN 4-5 modular spacing 6.1 mm, insulated yes, number of poles 5, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.204.4027.5	jumper bar IVB WTPN 4-10	jumper bar IVB WTPN 4-10 modular spacing 6.1 mm, insulated yes, number of poles 10, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.204.5027.5	jumper bar IVB WTPN 4-20	jumper bar IVB WTPN 4-20 modular spacing 6.1 mm, insulated yes, number of poles 20, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.204.8055.5	test plug PS 4	test plug PS 4 color red
0D.204.8155.5	spacer SPS 4	spacer SPS 4 color red
0D.204.8755.1	safety plug WTPN 4 FP5X20	safety plug WTPN 4 FP5X20 mounting method pluggable, color black, width/grid dimension 6.1 mm
0D.202.7381.0	marking strips WML 7.4/60	marking strips WML 7.4/60 color white
0D.204.7156.0	marking plate WMP 6.10-5.8	marking plate WMP 6.10-5.8 modular spacing 6.1 mm, color white

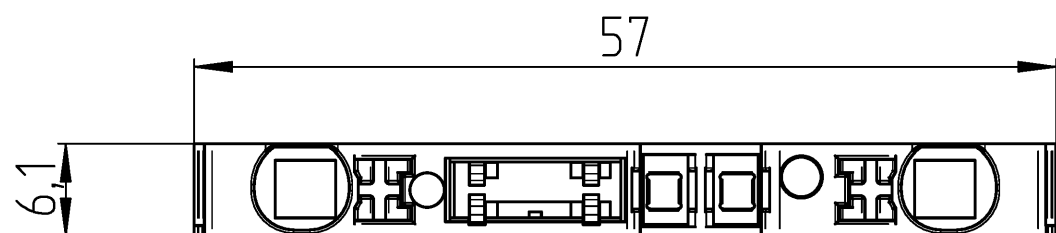

-Hutschiene EN 60715-35x7,5
/mounting rail EN 60715-35x7,5

– Hutschiene EN 60715-35x15
/mounting rail EN 60715-35x15

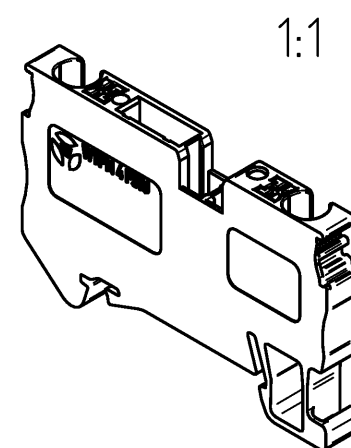

1:1

Weitere Daten siehe KATALOG oder eKatalog additional data see CATALOG or eCATALOG	www.wieland-electric.com eshop.wieland-electric.com
--	--

Tolerierung Size ISO 14405 ☐ / Tolerance system Size ISO 14405 ☐. (This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).	ja/yes ☑ Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten. Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!
---	---

Freitoleranz nach General tolerance	CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed	1. Verwendung: First Use:	Blatt: 1 von 1 Sheet: 1 of 1
--	---	------------------------------	---------------------------------

	/		Werkstoff / Material		Tag/Date	Name	Zeichnung Nr. / Drawing No.	Index
	/			gezeichnet drawn	09.05.2025	Hollet		
	/			Elektronische Freigabe Electronic Release				
	/			Maße in mm / Dimensions are in mm				
	/	Maßstab / Scale					5D.204.4655.0 13K	
	/	2:1						

/	Vol.	mm ³	Dfl./Srf.	mm ²	Ersatz für / Replacement for:
---	------	-----------------	-----------	-----------------	-------------------------------

			Type	Benennung/Title
	/			
	/			
Index	Datum / Blatt Date / Sheet	 wieland		SICHERUNGSKLEMME fuse terminal

Änderung / Revision

Bestell-Nr. /order no.	Typ /type	Farbe /colour	VPE: packaging unit
5D.204.4655.0	WTPN 4 FSI	grau / grey	20