


Data sheet

Commercial Art.No.: 5D.204.4855.0

fuse terminal WTPN 4 FSIU 5X20

fuse terminal WTPN 4 FSIU 5X20 rated voltage 400 V, rated current 6.3 A, push-In connection//true, number of levels 1, number of clamp positions per level 2, nominal cross section 4 mm², connectable conductor cross section fine stranded without cable end sleeve 0,2mm² - 4mm², mounting method DIN rail (top hat rail), color grey, width/grid dimension 6.1 mm, inflammability class of insulation material acc. with ul94 V0

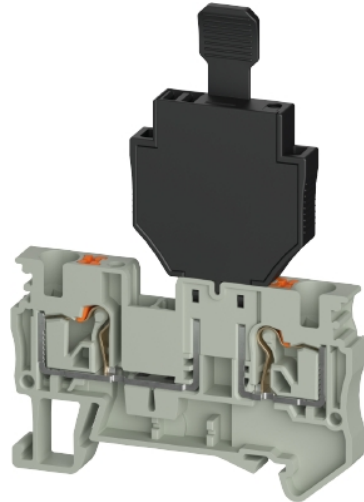

Commercial Art.No.	5D.204.4855.0
EAN	4049088719035
Order Unit	50

certificates / approvals



Technical data

general

nominal cross section	4 mm ²
color	grey
number of levels	1
number of clamp positions per level	2
width/grid dimension	6.1 mm
insulating housing	PA
inflammability class of insulation material acc. with UL94	V0
mounting method	DIN rail (top hat rail)

technical data

rated current	6.3 A
rated voltage	400 V
rated impulse voltage	6 kV
pollution degree	3
closing plate required	yes
type of insulation material	thermoplastic
length	57 mm
width	6.1 mm

connection data

connection type	push-In connection//true
connection type 1	plug-in connection

minimum cross section solid	0.2 mm ²
maximum cross section solid	6 mm ²
minimum cross section fine stranded	0.2 mm ²
maximum cross section fine stranded	4 mm ²
minumum conductor cross section (flex., stranded) with cable end sleeve	0.25 mm ²
maximum conductor cross section (flex., stranded) with cable end sleeve	4 mm ²
wire strip length	12 mm

technical data UL/CSA

cross section UL	24-10 AWG
voltage UL	300 V
current factory wiring	6.3 A
current field wiring	6.3 A
cross section CSA	24-10 AWG
voltage CSA	300 V
current CSA	6.3 A

classification


ETIM 9.0	EC000899
----------	----------

product compliance

REACH-SVHC conformity status	compliant
------------------------------	-----------

Accessories

Commercial Art.No.:	Article-type description:	Description:
0D.204.8800.0	fuse WF 5X20 1A	fuse WF 5X20 1A color transparent
0D.204.8900.0	fuse WF 5X20 2A	fuse WF 5X20 2A color transparent
0D.204.9000.0	fuse WF 5X20 6.3A	fuse WF 5X20 6.3A color transparent

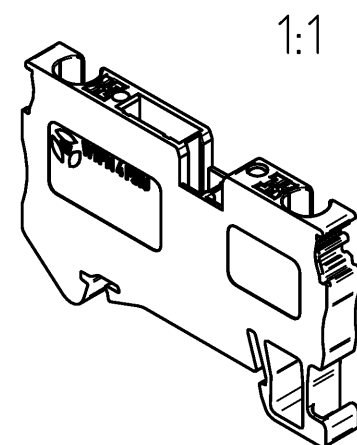

1	2	3	4	5	6
---	---	---	---	---	---