


Data sheet

Commercial Art.No.: 5D.204.9255.0

earth terminal WTPN 4 D2/2 PE

earth terminal WTPN 4 D2/2 PE rated voltage 800 V, push-In connection//true, number of levels 1, number of clamp positions per level 4, nominal cross section 4 mm², connectable conductor cross section fine stranded without cable end sleeve 0,2mm² - 4mm², mounting method DIN rail (top hat rail), color green/yellow, width/grid dimension 6.1 mm, inflammability class of insulation material acc. with ul94 V0

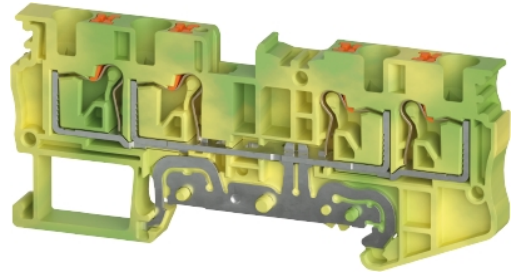

Commercial Art.No.	5D.204.9255.0
EAN	4049088706745
Order Unit	50

certificates / approvals



Technical data

general

nominal cross section	4 mm ²
color	green/yellow
number of levels	1
number of clamp positions per level	4
width/grid dimension	6.1 mm
insulating housing	PA
inflammability class of insulation material acc. with UL94	V0
mounting method	DIN rail (top hat rail)

technical data

rated voltage	800 V
rated impulse voltage	8 kV
pollution degree	3
closing plate required	yes
type of insulation material	thermoplastic
length	80.4 mm
width	6.1 mm

connection data

connection type	push-In connection//true
connection type 1	plug-in connection
minimum cross section solid	0.2 mm ²
maximum cross section solid	6 mm ²
minimum cross section fine stranded	0.2 mm ²
maximum cross section fine stranded	4 mm ²
minumum conductor cross section (flex., stranded) with cable end sleeve	0.25 mm ²
maximum conductor cross section (flex., stranded) with cable end sleeve	4 mm ²

wire strip length	12 mm
-------------------	-------

technical data UL/CSA

cross section UL	24-10 AWG
voltage UL	600 V
cross section CSA	24-10 AWG
voltage CSA	600 V

classification

ETIM 9.0	EC000901
----------	----------

product compliance


REACH-SVHC conformity status	compliant
------------------------------	-----------

Accessories

Commercial Art.No.:	Article-type description:	Description:
0D.204.8055.5	test plug PS 4	test plug PS 4 color red
0D.204.8155.5	spacer SPS 4	spacer SPS 4 color red
0D.204.2255.0	end plate APWTPN 4 D2/2	
0D.204.2255.7	end plate APWTPN 4 D2/2 GN	
0D.202.7281.0	marking strips WML 9.8/60	marking strips WML 9.8/60 color white
0D.202.7381.0	marking strips WML 7.4/60	marking strips WML 7.4/60 color white
0D.204.7056.0	marking plate WMP 6.10-10	marking plate WMP 6.10-10 modular spacing 6.1 mm, color white
0D.204.7156.0	marking plate WMP 6.10-5.8	marking plate WMP 6.10-5.8 modular spacing 6.1 mm, color white
0D.203.7455.0	marking tag ZS 003	marking tag ZS 003 modular spacing 5.1 mm, color transparent
0D.203.7555.0	marking tag ZS 004	marking tag ZS 004 modular spacing 12 mm, color transparent

Fits with

Commercial Art.No.:	Article-type description:	Description:
5D.202.9155.0	earth terminal WTPN 1.5 D1/2 PE	earth terminal WTPN 1.5 D1/2 PE rated voltage 500 V, push-In connection//true, number of levels 1, number of clamp positions per level 2, nominal cross section 1.5 mm ² , connectable conductor cross section fine stranded without cable end sleeve 0,14mm ² - 1,5mm ² , mounting method DIN rail (top hat rail), color green/yellow, width/grid dimension 3.5 mm, inflammability class of insulation material acc. with ul94 V0

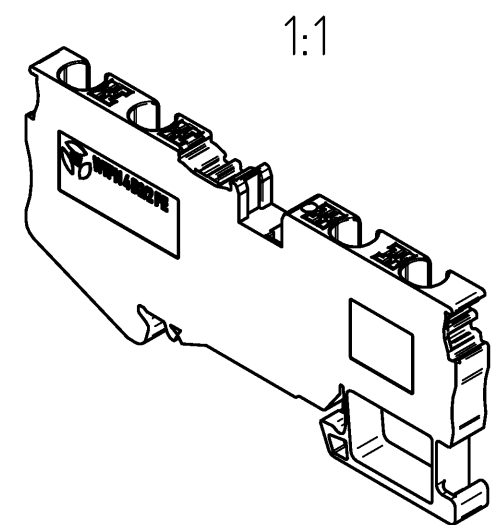

2025-11-20 15:34:03 1.000	2	3	4	5	6 01-QU-RD-32/21
---------------------------	---	---	---	---	------------------