
Data sheet

Commercial Art.No.: 5D.204.9755.0

earth terminal WTPN 4 EL PE

earth terminal WTPN 4 EL PE rated voltage 500 V, rated current 28 A, push-In connection//true, number of levels 2, number of clamp positions per level 2, nominal cross section 4 mm², connectable conductor cross section fine stranded without cable end sleeve 0,2mm² - 4mm², mounting method DIN rail (top hat rail), color grey, width/grid dimension 6.1 mm, inflammability class of insulation material acc. with ul94 V0

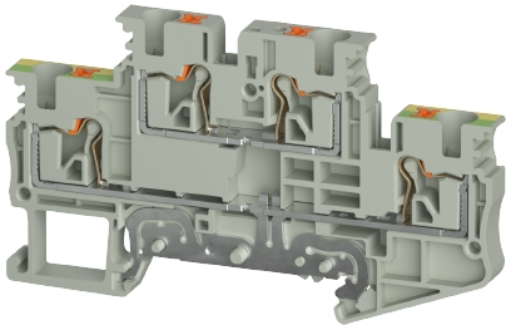

Commercial Art.No.	5D.204.9755.0
EAN	4049088706783
Order Unit	50

certificates / approvals

Technical data

general

nominal cross section	4 mm²
color	grey
number of levels	2
number of clamp positions per level	2
width/grid dimension	6.1 mm
insulating housing	PA
inflammability class of insulation material acc. with UL94	V0
mounting method	DIN rail (top hat rail)

technical data

rated current	28 A
rated voltage	500 V
rated impulse voltage	6 kV
pollution degree	3
closing plate required	yes
type of insulation material	thermoplastic
length	81 mm
width	6.1 mm

connection data

connection type	push-In connection//true
connection type 1	plug-in connection
minimum cross section solid	0.2 mm²
maximum cross section solid	6 mm²
minimum cross section fine stranded	0.2 mm²
maximum cross section fine stranded	4 mm²

minumum conductor cross section (flex., stranded) with cable end sleeve	0.25 mm²
maximum conductor cross section (flex., stranded) with cable end sleeve	4 mm²
wire strip length	12 mm

technical data UL/CSA

cross section UL	24-10 AWG
voltage UL	300 V
current factory wiring	30 A
current field wiring	30 A
cross section CSA	24-10 AWG
voltage CSA	300 V
current CSA	30 A

classification

ETIM 9.0	EC000901

product compliance

REACH-SVHC conformity status	compliant

Accessories

Commercial Art.No.:	Article-type description:	Description:
0D.204.3227.5	jumper bar IVB WTPN 4-2	jumper bar IVB WTPN 4-2 modular spacing 6.1 mm, insulated yes, number of poles 2, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.204.3327.5	jumper bar IVB WTPN 4-3	jumper bar IVB WTPN 4-3 modular spacing 6.1 mm, insulated yes, number of poles 3, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.204.3427.5	jumper bar IVB WTPN 4-4	jumper bar IVB WTPN 4-4 modular spacing 6.1 mm, insulated yes, number of poles 4, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.204.3527.5	jumper bar IVB WTPN 4-5	jumper bar IVB WTPN 4-5 modular spacing 6.1 mm, insulated yes, number of poles 5, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.204.4027.5	jumper bar IVB WTPN 4-10	jumper bar IVB WTPN 4-10 modular spacing 6.1 mm, insulated yes, number of poles 10, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.204.5027.5	jumper bar IVB WTPN 4-20	jumper bar IVB WTPN 4-20 modular spacing 6.1 mm, insulated yes, number of poles 20, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.204.8055.5	test plug PS 4	test plug PS 4 color red
0D.204.8155.5	spacer SPS 4	spacer SPS 4 color red
0D.204.2355.0	end plate APWTPN 4 E	
0D.202.7381.0	marking strips WML 7.4/60	marking strips WML 7.4/60 color white
0D.204.7156.0	marking plate WMP 6.10-5.8	marking plate WMP 6.10-5.8 modular spacing 6.1 mm, color white

Fits with

Commercial Art.No.:	Article-type description:	Description:

5D.202.9155.0	earth terminal WTPN 1.5 D1/2 PE	earth terminal WTPN 1.5 D1/2 PE rated voltage 500 V, push-In connection//true, number of levels 1, number of clamp positions per level 2, nominal cross section 1.5 mm², connectable conductor cross section fine stranded without cable end sleeve 0,14mm² - 1,5mm², mounting method DIN rail (top hat rail), color green/yellow, width/grid dimension 3.5 mm, inflammability class of insulation material acc. with ul94 V0