


Data sheet

Commercial Art.No.: 5D.S03.2155.6

connector disconnect terminal WTN 2.5 TKGM BL

connector disconnect terminal WTN 2.5 TKGM BL rated voltage 400 V, rated current 24 A, screw connection, number of levels 1, number of clamp positions per level 2, nominal cross section 2.5 mm², connectable conductor cross section fine stranded without cable end sleeve 0,34mm² - 2,5mm², mounting method DIN rail (top hat rail), color blue, width/grid dimension 5.1 mm, inflammability class of insulation material acc. with ul94 V0

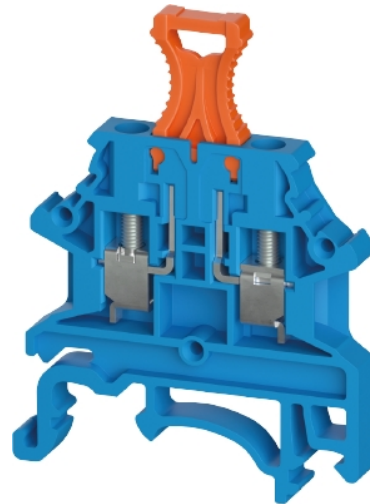

Commercial Art.No.	5D.S03.2155.6
EAN	4049088724398
Order Unit	100

certificates / approvals



Technical data

general

nominal cross section	2.5 mm ²
color	blue
number of levels	1
number of clamp positions per level	2
width/grid dimension	5.1 mm
insulating housing	PA
inflammability class of insulation material acc. with UL94	V0
mounting method	DIN rail (top hat rail)

technical data

rated current	24 A
rated voltage	400 V
rated impulse voltage	6 kV
pollution degree	3
closing plate required	yes
type of insulation material	thermoplastic
length	40.7 mm
width	5.1 mm

connection data

connection type	screw connection
connection type 1	screw connection

connection type 2	screw connection
minimum cross section solid	0.34 mm ²
maximum cross section solid	2.5 mm ²
minimum cross section fine stranded	0.34 mm ²
maximum cross section fine stranded	2.5 mm ²
minumum conductor cross section (flex., stranded) with cable end sleeve	0.25 mm ²
maximum conductor cross section (flex., stranded) with cable end sleeve	2.5 mm ²
wire strip length	10 mm
torque conductor mounting	0.4 Nm

technical data UL/CSA

cross section UL	22-12 AWG
voltage UL	300 V
current factory wiring	20 A
current field wiring	20 A
cross section CSA	26-12 AWG
voltage CSA	300 V
current CSA	20 A

classification

ETIM 9.0	EC000902
----------	----------

product compliance

REACH-SVHC conformity status	compliant
------------------------------	-----------

Accessories


Commercial Art.No.:	Article-type description:	Description:
0D.S04.2055.0	end plate APWTN 2.5/4	
0D.202.7281.0	marking strips WML 9.8/60	marking strips WML 9.8/60 color white
0D.203.7056.0	marking plate WMP 5,10-10	marking plate WMP 5,10-10 modular spacing 5.1 mm, color white

A
Alle Rechte vorbehalten
All rights reserved
Vertraulichkeitsklasse
Confidentiality Class
Vertraulich
Confidential

B
These dimensions will be especially checked at delivery
Only inspection dimensions
With /E marked dimensions are only valid for internal use



C
Diese Maße werden bei Abnahme besonders geprüft
Ausschließlich Prüfmaße
Mit /E gekennzeichnete Maße sind nur für interne Zwecke gültig

F

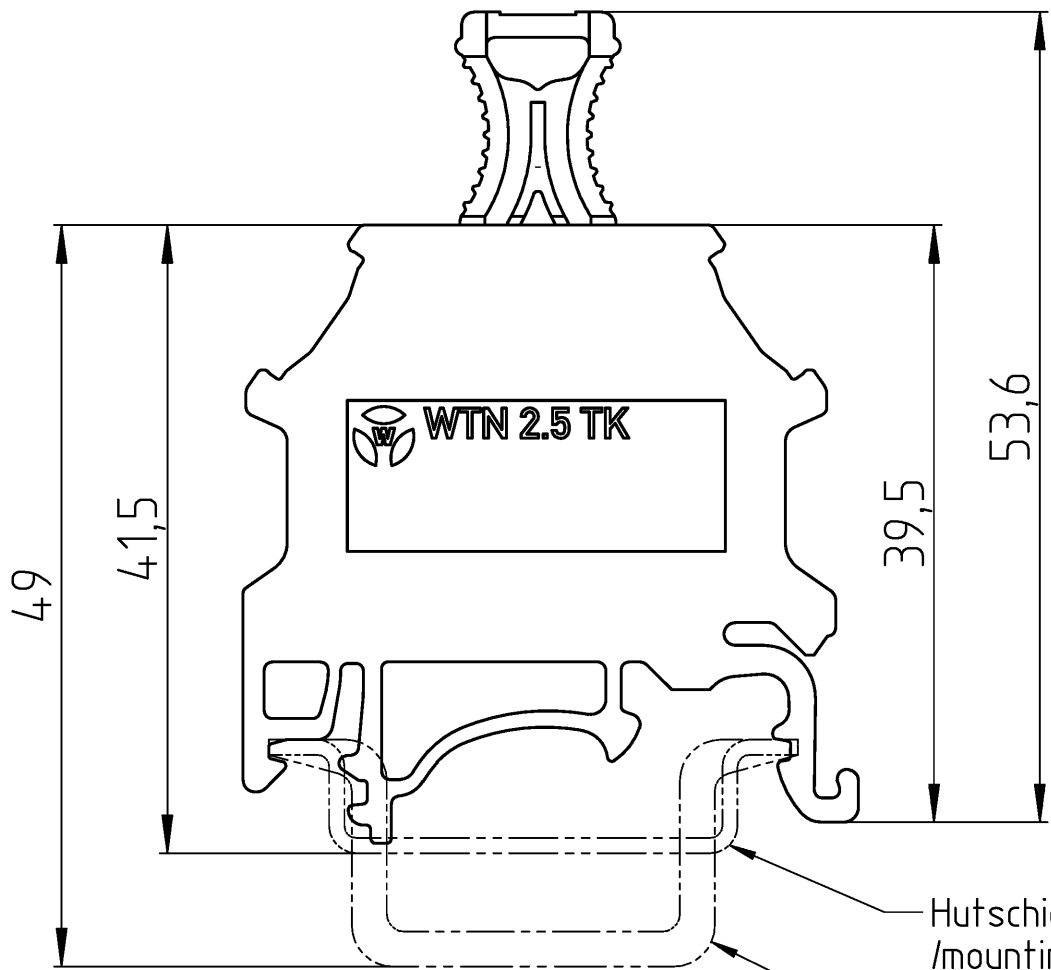

Hutschiene EN 60715-35x7,5
/mounting rail EN 60715-35x7,5

Hutschiene EN 60715-35x15
/mounting rail EN 60715-35x15

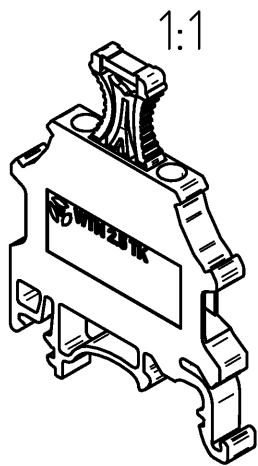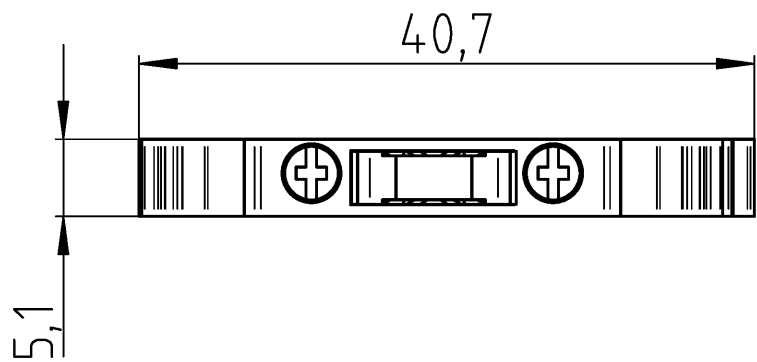

Weitere Daten siehe KATALOG oder eKatalog
additional data see CATALOG or eCATALOG
www.wieland-electric.com
eshop.wieland-electric.com

Tolerierung Size ISO 14405 © / Tolerance system Size ISO 14405 ©. (This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).				ja/yes ☒ Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten. Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!			
Freitoleranz nach General tolerance		CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed		1. Verwendung: First Use:		Blatt: Sheet: 1 von 1 of 1	
		Werkstoff / Material		Tag/Date		Name	
				gezeichnet drawn 16.09.2025		Sachs (extern)	
		Maßstab / Scale		Elektronische Freigabe Electronic Release		Zeichnung Nr. / Drawing No.	
		2:1				T 5D.S03.2155.0 13K	
		Vol. mm³		Dfl./Srf. mm²		Maße in mm / Dimensions are in mm	
		Ersatz für / Replacement for:		Type		Benennung/Title	
		Index		Datum / Blatt Date / Sheet		VERBINDER TRENNKLEMME	
		Änderung / Revision		wieland		connector disc. terminal	

Bestell-Nr. /order no.	Typ /type	Farbe /colour	VPE: packaging unit:
5D.S03.2155.0	WTN 2.5 TKGM	grau / grey	100
5D.S03.2155.5	WTN 2.5 TKGM RT	rot / red	
5D.S03.2155.6	WTN 2.5 TKGM BL	blau / blue	