


Data sheet

Commercial Art.No.: 5D.S03.5055.6

feed-through terminal WTN 2.5 D1/2 BL

feed-through terminal WTN 2.5 D1/2 BL rated voltage 1000 V, rated current 24 A, screw connection, number of levels 1, number of clamp positions per level 2, nominal cross section 2.5 mm², connectable conductor cross section fine stranded without cable end sleeve 0,14mm² - 2,5mm², mounting method DIN rail (top hat rail), color blue, width/grid dimension 5.1 mm, inflammability class of insulation material acc. with UL94 V0

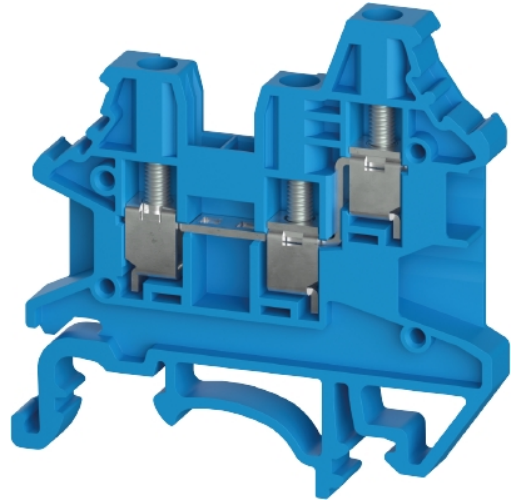

Commercial Art.No.	5D.S03.5055.6
EAN	4049088724640
Order Unit	100

certificates / approvals



Technical data

general

nominal cross section	2.5 mm ²
color	blue
number of levels	1
number of clamp positions per level	2
width/grid dimension	5.1 mm
insulating housing	PA
inflammability class of insulation material acc. with UL94	V0
mounting method	DIN rail (top hat rail)

technical data

rated current	24 A
rated voltage	1000 V
rated impulse voltage	8 kV
pollution degree	3
closing plate required	yes
type of insulation material	thermoplastic
length	48.7 mm
width	5.1 mm

connection data

connection type	screw connection
connection type 1	screw connection

connection type 2	screw connection
minimum cross section solid	0.14 mm ²
maximum cross section solid	4 mm ²
minimum cross section fine stranded	0.14 mm ²
maximum cross section fine stranded	2.5 mm ²
minumum conductor cross section (flex., stranded) with cable end sleeve	0.25 mm ²
maximum conductor cross section (flex., stranded) with cable end sleeve	2.5 mm ²
wire strip length	10 mm
torque conductor mounting	0.4 Nm

technical data UL/CSA

cross section UL	22-12 AWG
voltage UL	600 V
current factory wiring	20 A
current field wiring	20 A
cross section CSA	22-12 AWG
voltage CSA	600 V
current CSA	20 A

classification

ETIM 9.0	EC000897
----------	----------

product compliance

REACH-SVHC conformity status	compliant
------------------------------	-----------

Accessories

Commercial Art.No.:	Article-type description:	Description:
0D.S03.3227.5	jumper bar IVB WTN 2,5-2	jumper bar IVB WTN 2,5-2 modular spacing 5.1 mm, insulated yes, number of poles 2, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S03.3327.5	jumper bar IVB WTN 2,5-3	jumper bar IVB WTN 2,5-3 modular spacing 5.1 mm, insulated yes, number of poles 3, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S03.3427.5	jumper bar IVB WTN 2,5-4	jumper bar IVB WTN 2,5-4 modular spacing 5.1 mm, insulated yes, number of poles 4, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S03.3527.5	jumper bar IVB WTN 2,5-5	jumper bar IVB WTN 2,5-5 modular spacing 5.1 mm, insulated yes, number of poles 5, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S03.4027.5	jumper bar IVB WTN 2,5-10	jumper bar IVB WTN 2,5-10 modular spacing 5.1 mm, insulated yes, number of poles 10, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S03.5027.5	jumper bar IVB WTN 2,5-20	jumper bar IVB WTN 2,5-20 modular spacing 5.1 mm, insulated yes, number of poles 20, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S03.5127.5	jumper bar IVB WTN 2.5R6	jumper bar IVB WTN 2.5R6 modular spacing 7.8 mm, insulated yes, number of poles 2, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0


0D.S03.5227.5	jumper bar IVB WTN 2.5R10	jumper bar IVB WTN 2.5R10 modular spacing 8.5 mm, insulated yes, number of poles 2, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S13.3227.5	jumper bar IVB WTN 2.5P2	jumper bar IVB WTN 2.5P2 modular spacing 10 mm, insulated yes, number of poles 2, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S13.3327.5	jumper bar IVB WTN 2.5P3	jumper bar IVB WTN 2.5P3 modular spacing 10 mm, insulated yes, number of poles 3, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S13.3427.5	jumper bar IVB WTN 2.5P4	jumper bar IVB WTN 2.5P4 modular spacing 10 mm, insulated yes, number of poles 4, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S13.3527.5	jumper bar IVB WTN 2.5P5	jumper bar IVB WTN 2.5P5 modular spacing 10 mm, insulated yes, number of poles 5, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S03.5955.5	test plug PS 2.5 WTN	test plug PS 2.5 WTN color red
0D.S03.6955.9	lever LVWTN 2.5/4	lever LVWTN 2.5/4 color orange
0D.S03.2155.0	end plate APWTN 2,5/4 D1/2	
0D.S04.1055.9	partition TW 001 WTN	
0D.202.7281.0	marking strips WML 9.8/60	marking strips WML 9.8/60 color white
0D.203.7056.0	marking plate WMP 5,10-10	marking plate WMP 5,10-10 modular spacing 5.1 mm, color white

Alle Rechte vorbehalten
All rights reserved
Vertraulichkeitsklasse
Confidentiality Class

Vertraulich
Confidential



These dimensions will be especially checked at delivery
Only inspection dimensions
With /E marked dimensions are only valid for internal use

Diese Maße werden bei Abnahme besonders geprüft
Ausschließlich Prüfmaße
Mit /E gekennzeichnete Maße sind nur für interne Zwecke gültig

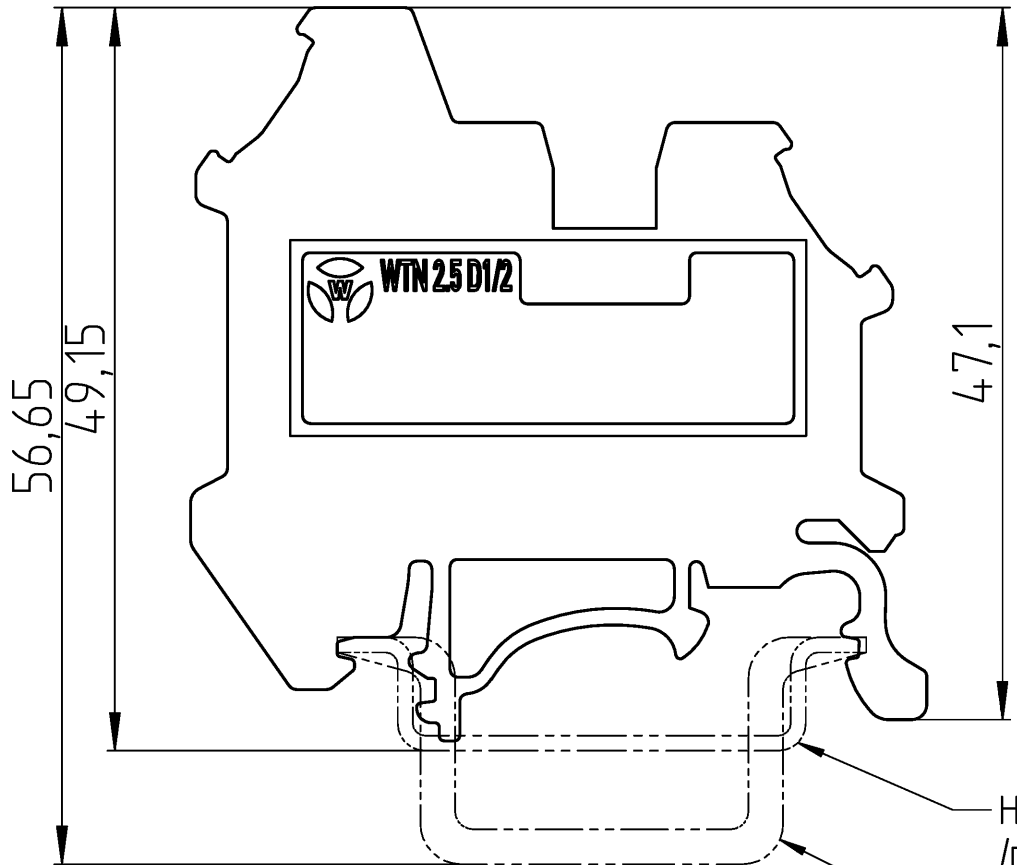

Hutschiene EN 60715-35x7,5
/mounting rail EN 60715-35x7,5

Hutschiene EN 60715-35x15
/mounting rail EN 60715-35x15

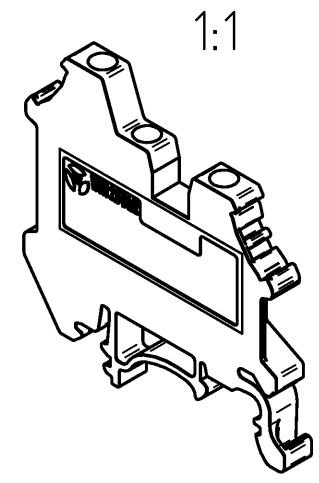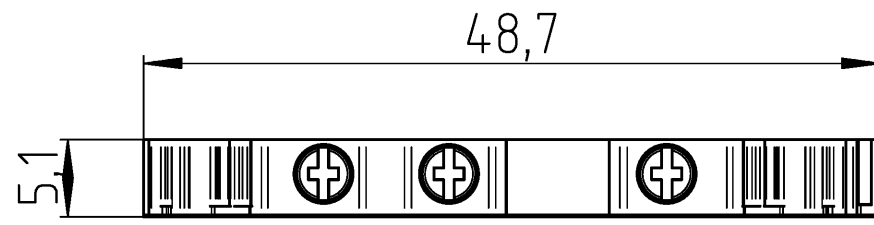

Weitere Daten siehe KATALOG oder eKatalog
additional data see CATALOG or eCATALOG

www.wieland-electric.com
eshop.wieland-electric.com

Tolerierung Size ISO 14405 © / Tolerance system Size ISO 14405 ©. (This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).				ja/yes ☒ Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten. Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!					
Freitoleranz nach General tolerance			CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed		1. Verwendung: First Use:		Blatt: Sheet: 1 von 1 of 1		
		/		Werkstoff / Material		Tag/Date		Name	
		/				gezeichnet drawn		28.08.2025 Eichhorn N.	
		/		Maßstab / Scale					
		/		2:1					
		/		Vol.		mm ³ Dfl./Srf.		mm ²	
		/				Ersatz für / Replacement for:			
		/				Type		Benennung/Title	
		/							
Index		Datum / Blatt Date / Sheet		Änderung / Revision		wieland		DURCHGANGSKLEMME feed-through terminal	

Bestell-Nr. /order no.	Typ /type	Farbe /colour	VPE: packaging unit:
5D.S03.5055.0	WTN 2.5 D1/2	grau / grey	100
5D.S03.5055.5	WTN 2.5 D1/2 RT	rot / red	
5D.S03.5055.6	WTN 2.5 D1/2 BL	blau / blue	