


Data sheet

Commercial Art.No.: 5D.S03.8755.0

multi-tier terminal WTN 2.5 E D02

multi-tier terminal WTN 2.5 E D02 rated voltage 250 V, rated current 0.5 A, screw connection, number of levels 2, number of clamp positions per level 2, nominal cross section 2.5 mm², connectable conductor cross section fine stranded without cable end sleeve 0,34mm² - 2,5mm², mounting method DIN rail (top hat rail), color grey, width/grid dimension 5.1 mm, inflammability class of insulation material acc. with ul94 V0

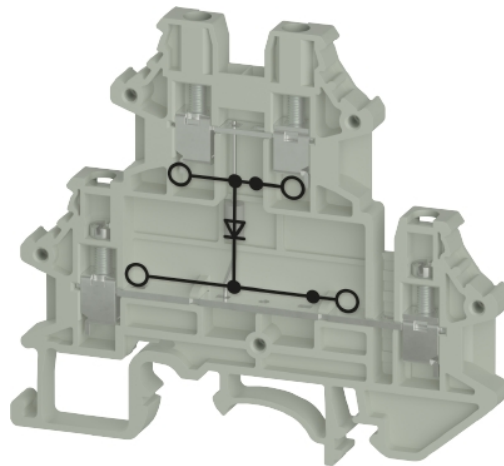

Commercial Art.No.	5D.S03.8755.0
EAN	4049088724817
Order Unit	20

certificates / approvals



Technical data

general

nominal cross section	2.5 mm ²
color	grey
number of levels	2
number of clamp positions per level	2
width/grid dimension	5.1 mm
insulating housing	PA
inflammability class of insulation material acc. with UL94	V0
mounting method	DIN rail (top hat rail)

technical data

rated current	0.5 A
rated voltage	250 V
rated impulse voltage	6 kV
pollution degree	3
closing plate required	yes
type of insulation material	thermoplastic
length	71.5 mm
width	5.1 mm

connection data

connection type	screw connection
connection type 1	screw connection
connection type 2	screw connection

minimum cross section solid	0.34 mm ²
maximum cross section solid	4 mm ²
minimum cross section fine stranded	0.34 mm ²
maximum cross section fine stranded	2.5 mm ²
minumum conductor cross section (flex., stranded) with cable end sleeve	0.25 mm ²
maximum conductor cross section (flex., stranded) with cable end sleeve	2.5 mm ²
wire strip length	10 mm
torque conductor mounting	0.4 Nm

technical data UL/CSA

cross section UL	22-12 AWG
voltage UL	250 V
current factory wiring	0.5 A
current field wiring	0.5 A
cross section CSA	22-12 AWG
voltage CSA	250 V
current CSA	0.5 A

classification

ETIM 9.0	EC000897
----------	----------


product compliance

REACH-SVHC conformity status	compliant
------------------------------	-----------



Accessories

Commercial Art.No.:	Article-type description:	Description:
0D.S03.3227.5	jumper bar IVB WTN 2,5-2	jumper bar IVB WTN 2,5-2 modular spacing 5.1 mm, insulated yes, number of poles 2, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S03.3327.5	jumper bar IVB WTN 2,5-3	jumper bar IVB WTN 2,5-3 modular spacing 5.1 mm, insulated yes, number of poles 3, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S03.3427.5	jumper bar IVB WTN 2,5-4	jumper bar IVB WTN 2,5-4 modular spacing 5.1 mm, insulated yes, number of poles 4, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S03.3527.5	jumper bar IVB WTN 2,5-5	jumper bar IVB WTN 2,5-5 modular spacing 5.1 mm, insulated yes, number of poles 5, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S03.4027.5	jumper bar IVB WTN 2,5-10	jumper bar IVB WTN 2,5-10 modular spacing 5.1 mm, insulated yes, number of poles 10, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S03.5027.5	jumper bar IVB WTN 2,5-20	jumper bar IVB WTN 2,5-20 modular spacing 5.1 mm, insulated yes, number of poles 20, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S13.3227.5	jumper bar IVB WTN 2.5P2	jumper bar IVB WTN 2.5P2 modular spacing 10 mm, insulated yes, number of poles 2, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0

0D.S13.3327.5	jumper bar IVB WTN 2.5P3	jumper bar IVB WTN 2.5P3 modular spacing 10 mm, insulated yes, number of poles 3, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S13.3427.5	jumper bar IVB WTN 2.5P4	jumper bar IVB WTN 2.5P4 modular spacing 10 mm, insulated yes, number of poles 4, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S13.3527.5	jumper bar IVB WTN 2.5P5	jumper bar IVB WTN 2.5P5 modular spacing 10 mm, insulated yes, number of poles 5, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S03.5955.5	test plug PS 2.5 WTN	test plug PS 2.5 WTN color red
0D.S03.6955.9	lever LVWTN 2.5/4	lever LVWTN 2.5/4 color orange
0D.S03.2355.0	end plate APWTN 2.5/4 E	
0D.S04.1055.9	partition TW 001 WTN	
0D.202.7281.0	marking strips WML 9.8/60	marking strips WML 9.8/60 color white
0D.203.7056.0	marking plate WMP 5,10-10	marking plate WMP 5,10-10 modular spacing 5.1 mm, color white

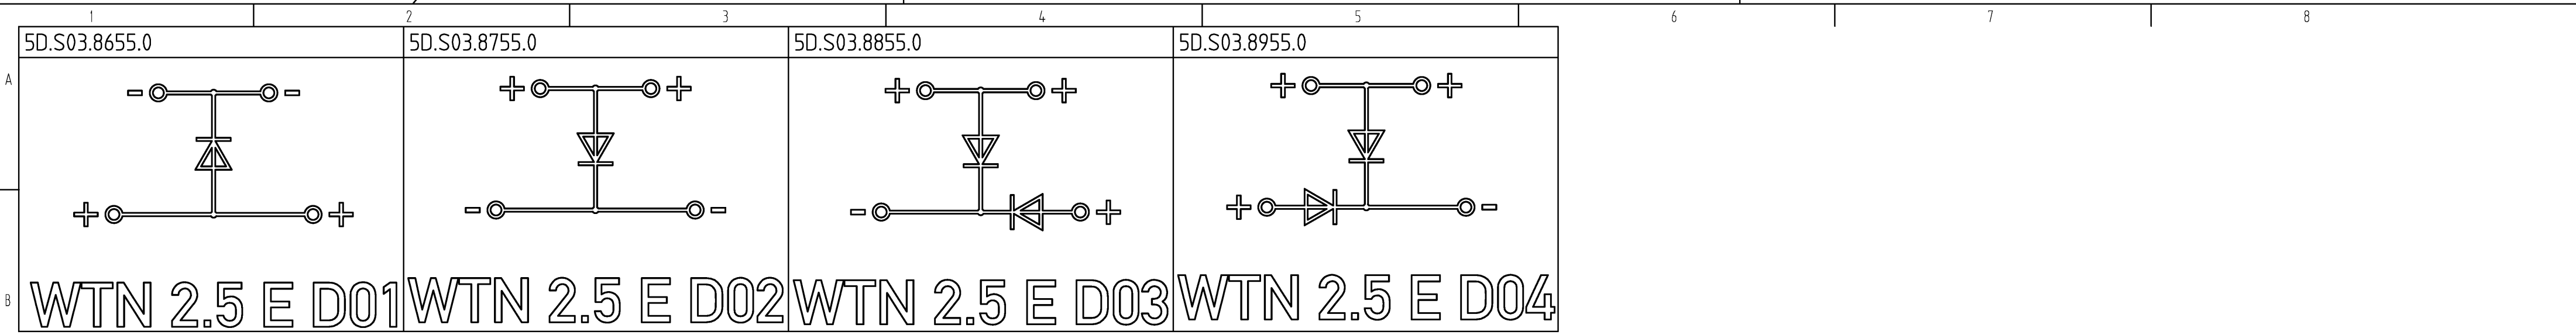


Dargestellte Ansicht 5D.S03.8655.0
/shown version 5D.S03.8655.0

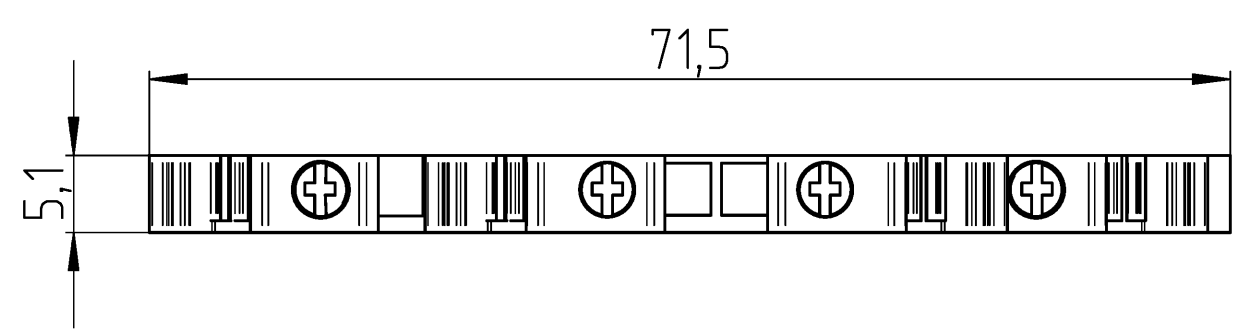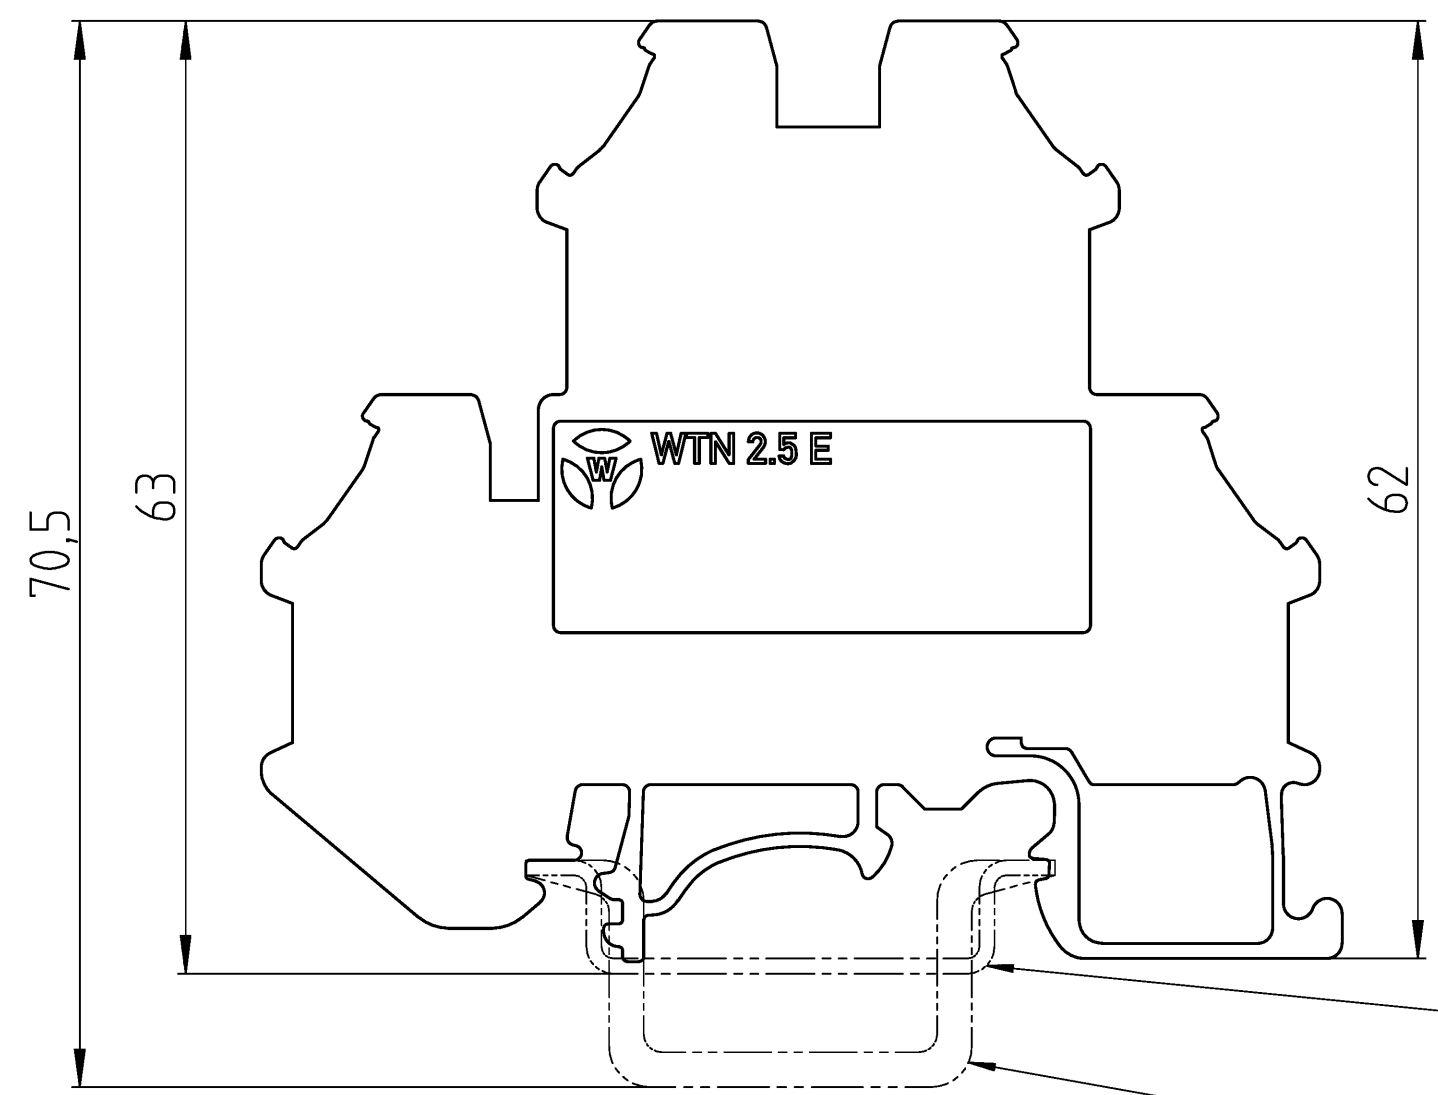

Hutschiene EN 60715-35x7,5
/mounting rail EN 60715-35x7,5

Hutschiene EN 60715-35x15
/mounting rail EN 60715-35x15

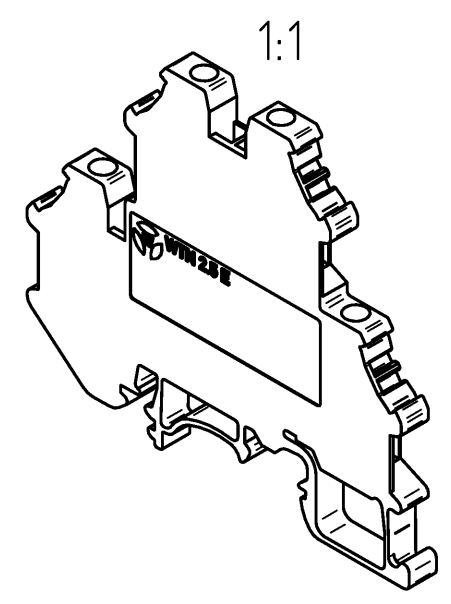

Alle Rechte vorbehalten
All rights reserved
Vertraulich
Confidentially Class

These dimensions will be especially checked at delivery
Only inspection dimensions
With /E marked dimensions are only valid for internal use

Diese Maße werden bei Abnahme besonders geprüft
Ausschließlich für interne Zwecke
Für /E gekennzeichnete Maße sind nur für interne Zwecke gültig

Weitere Daten siehe KATALOG oder eKatalog
additional data see CATALOG or eCATALOG

www.wieland-electric.com
eshop.wieland-electric.com

Tolerierung Size ISO 14405 © / Tolerance system Size ISO 14405 © (This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances)		ja/yes ☒ Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten. Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!	
Freitoleranz nach General tolerance		CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed	
		1. Verwendung: First Use:	
		Blatt: 1 von 1 Sheet: of	
		Zeichnung Nr. / Drawing No.	
		Index	
		Maße in mm / Dimensions are in mm	
		Ersatz für / Replacement for:	
		Type	
		Benennung/Title	
		ETAGENKKLEMME	
		double deck terminal	

Bestell-Nr. /order no.	Typ /type	Farbe /colour
5D.S03.8655.0	WTN 2.5 E D01	grau / grey
5D.S03.8755.0	WTN 2.5 E D02	grau / grey
5D.S03.8855.0	WTN 2.5 E D03	grau / grey
5D.S03.8955.0	WTN 2.5 E D04	grau / grey