


Data sheet

Commercial Art.No.: 5D.S06.0055.5

feed-through terminal WTN 6 RT

feed-through terminal WTN 6 RT rated voltage 1000 V, rated current 41 A, screw connection, number of levels 1, number of clamp positions per level 2, nominal cross section 6 mm², connectable conductor cross section fine stranded without cable end sleeve 0,5mm² - 6mm², mounting method DIN rail (top hat rail), color red, width/grid dimension 8 mm, inflammability class of insulation material acc. with ul94 V0

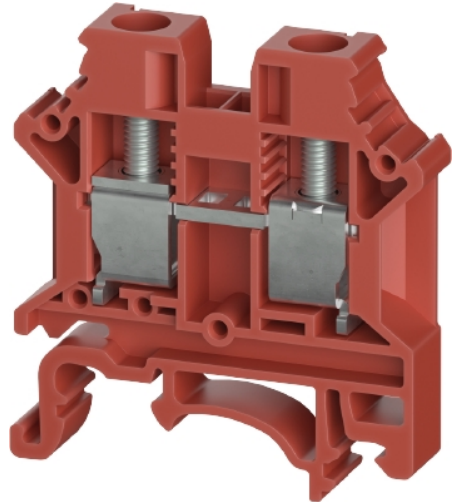

Commercial Art.No.	5D.S06.0055.5
EAN	4049088725265
Order Unit	100

certificates / approvals



Technical data

general

nominal cross section	6 mm ²
color	red
number of levels	1
number of clamp positions per level	2
width/grid dimension	8 mm
insulating housing	PA
inflammability class of insulation material acc. with UL94	V0
mounting method	DIN rail (top hat rail)

technical data

rated current	41 A
rated voltage	1000 V
rated impulse voltage	8 kV
pollution degree	3
closing plate required	yes
type of insulation material	thermoplastic
length	43.3 mm
width	8 mm

connection data

connection type	screw connection
connection type 1	screw connection

connection type 2	screw connection
minimum cross section solid	0.5 mm ²
maximum cross section solid	10 mm ²
minimum cross section fine stranded	0.5 mm ²
maximum cross section fine stranded	6 mm ²
minumum conductor cross section (flex., stranded) with cable end sleeve	0.5 mm ²
maximum conductor cross section (flex., stranded) with cable end sleeve	6 mm ²
wire strip length	12 mm
torque conductor mounting	1.2 Nm

technical data UL/CSA

cross section UL	20-8 AWG
voltage UL	600 V
current factory wiring	50 A
current field wiring	50 A
cross section CSA	20-8 AWG
voltage CSA	600 V
current CSA	50 A

classification

ETIM 9.0	EC000897
----------	----------



product compliance

REACH-SVHC conformity status	compliant
------------------------------	-----------

Accessories

Commercial Art.No.:	Article-type description:	Description:
0D.S03.5127.5	jumper bar IVB WTN 2.5R6	jumper bar IVB WTN 2.5R6 modular spacing 7.8 mm, insulated yes, number of poles 2, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S04.5127.5	jumper bar IVB WTN 4R6	jumper bar IVB WTN 4R6 modular spacing 8.3 mm, insulated yes, number of poles 2, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S06.3227.5	jumper bar IVB WTN 6-2	jumper bar IVB WTN 6-2 modular spacing 8 mm, insulated yes, number of poles 2, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S06.3327.5	jumper bar IVB WTN 6-3	jumper bar IVB WTN 6-3 modular spacing 8 mm, insulated yes, number of poles 3, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S06.3427.5	jumper bar IVB WTN 6-4	jumper bar IVB WTN 6-4 modular spacing 8 mm, insulated yes, number of poles 4, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S06.3527.5	jumper bar IVB WTN 6-5	jumper bar IVB WTN 6-5 modular spacing 8 mm, insulated yes, number of poles 5, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S06.4027.5	jumper bar IVB WTN 6-10	jumper bar IVB WTN 6-10 modular spacing 8 mm, insulated yes, number of poles 10, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0

0D.S06.5227.5	jumper bar IVB WTN 6R16	jumper bar IVB WTN 6R16 modular spacing 11.2 mm, insulated yes, number of poles 2, color red, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S06.6555.2	cover ADWTN 6 SC	cover ADWTN 6 SC color white
0D.S06.6555.8	cover ADWTN 6 SC Y	cover ADWTN 6 SC Y color yellow
0D.S04.1055.9	partition TW 001 WTN	
0D.S04.1255.9	partition TW 008 WTN	
0D.S06.2055.0	end plate APWTN 6	
0D.S06.2655.0	end plate APWTN 6 B	
0D.202.7281.0	marking strips WML 9.8/60	marking strips WML 9.8/60 color white
0D.206.7056.0	marking plate WMP 8-10	marking plate WMP 8-10 modular spacing 8 mm, color white

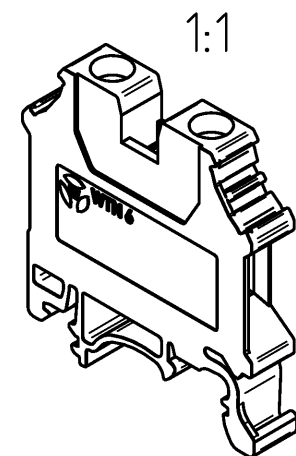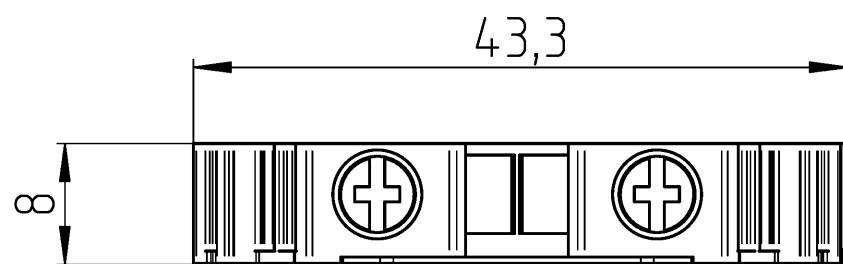

2025-11-26 13:57:46 1.000	2		3		4		5	6 01-QU-RD-32/21
---------------------------	---	--	---	--	---	--	---	------------------