


Data sheet

Commercial Art.No.: 5D.S25.1655.0

high current terminal WRTN 25 U

high current terminal WRTN 25 U rated voltage 1500 V, rated current 101 A, bolt connection, number of levels 1, number of clamp positions per level 2, nominal cross section 25 mm², connectable conductor cross section fine stranded without cable end sleeve 2,5mm² - 25mm², mounting method DIN rail (top hat rail), color grey, width/grid dimension 27 mm, inflammability class of insulation material acc. with ul94 V0

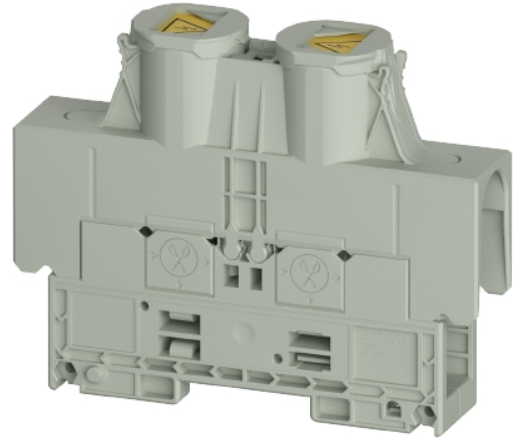

Commercial Art.No.	5D.S25.1655.0
EAN	4049088725494
Order Unit	5

certificates / approvals



Technical data

general

nominal cross section	25 mm ²
color	grey
number of levels	1
number of clamp positions per level	2
width/grid dimension	27 mm
insulating housing	PA
inflammability class of insulation material acc. with UL94	V0
mounting method	DIN rail (top hat rail)

technical data

rated current	101 A
rated voltage	1000 V
rated impulse voltage	8 kV
closing plate required	no
length	126.8 mm
width	27 mm

connection data

connection type	bolt connection
connection type 1	screw connection
minimum cross section solid	2.5 mm ²
maximum cross section solid	25 mm ²
minimum cross section fine stranded	2.5 mm ²
maximum cross section fine stranded	25 mm ²

torque conductor mounting	5 Nm
---------------------------	------

technical data UL/CSA

cross section UL	14-4 AWG
voltage UL	1500 V
current factory wiring	85 A
current field wiring	85 A
cross section CSA	14-4 AWG
voltage CSA	
current CSA	85 A

classification


ETIM 9.0	EC000897
----------	----------

product compliance

REACH-SVHC conformity status	compliant
------------------------------	-----------

Accessories

Commercial Art.No.:	Article-type description:	Description:
0D.S25.3227.0	jumper bar VB WRTN 25-2	jumper bar VB WRTN 25-2 modular spacing 27 mm, insulated no, number of poles 2, color grey, mounting method screwable, inflammability class of insulation material acc. with ul94 V0
0D.S25.3327.0	jumper bar VB WRTN 25-3	jumper bar VB WRTN 25-3 modular spacing 27 mm, insulated no, number of poles 3, color grey, mounting method screwable, inflammability class of insulation material acc. with ul94 V0
0D.202.7281.0	marking strips WML 9.8/60	marking strips WML 9.8/60 color white
0D.210.7056.0	marking plate WMP 10-10	marking plate WMP 10-10 modular spacing 10 mm, color white

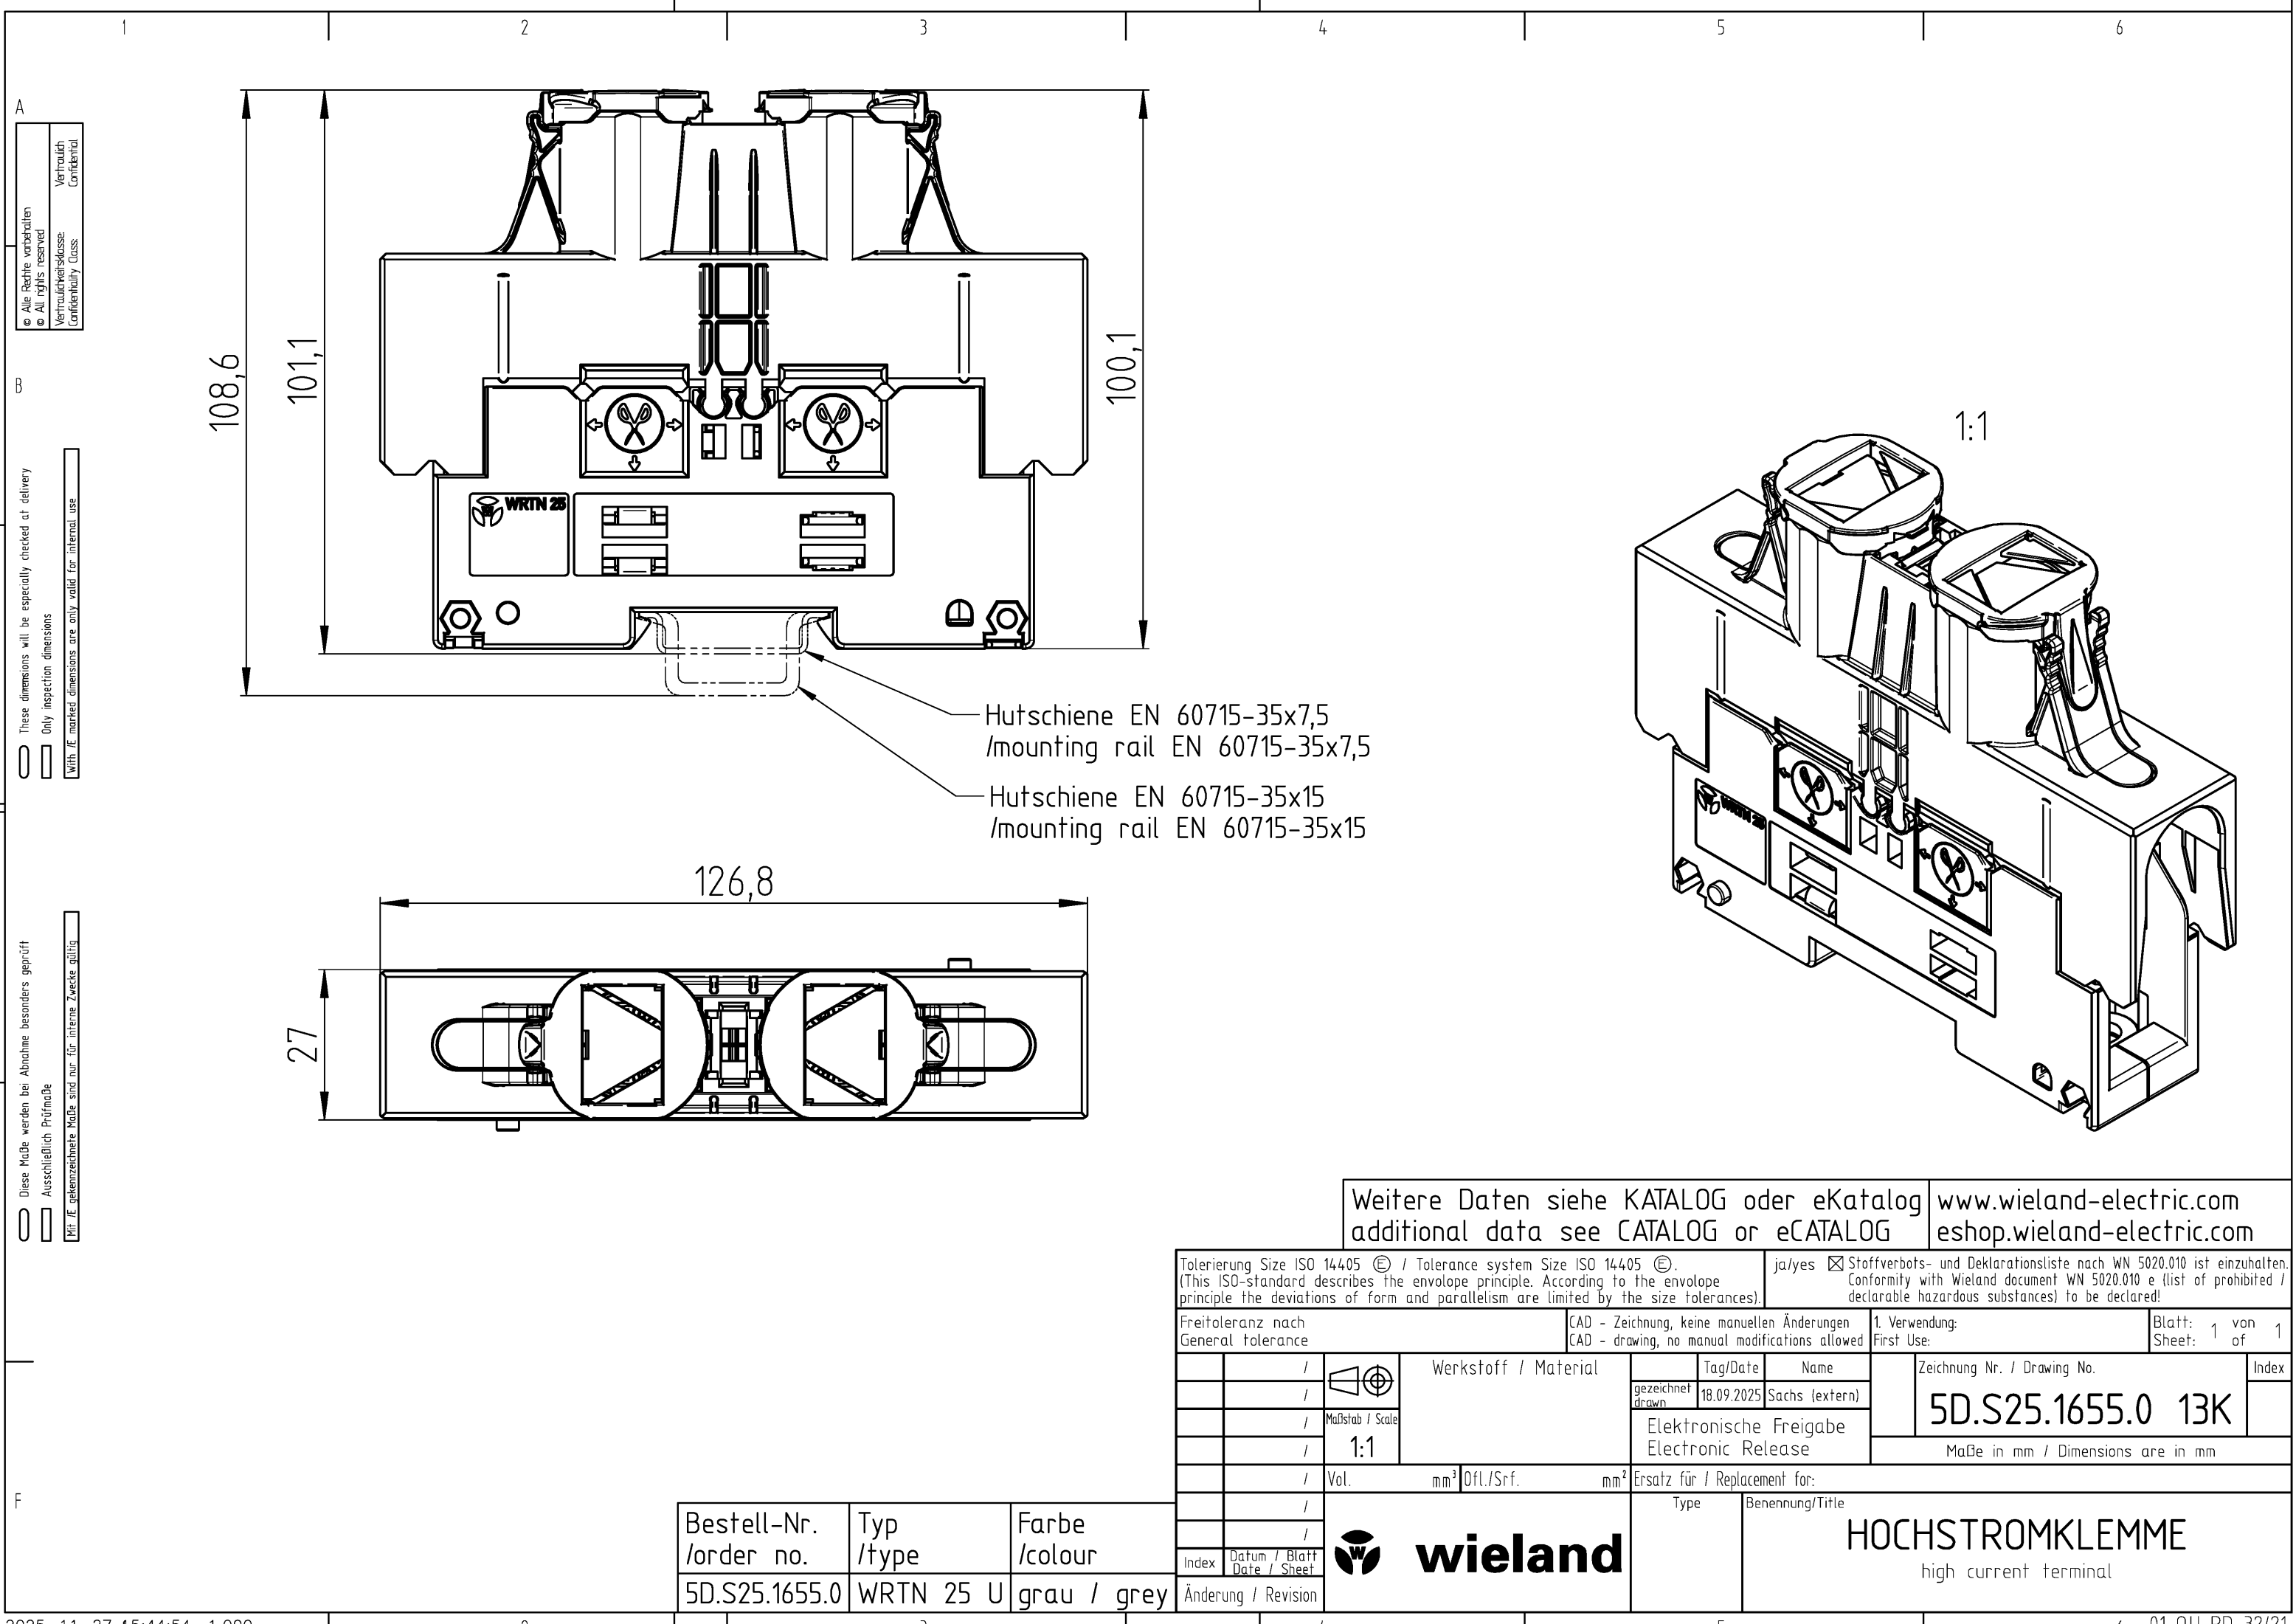

A
© Alle Rechte vorbehalten
© All rights reserved
Vertraulich
Confidential

B
These dimensions will be especially checked at delivery
Only inspection dimensions
With /E marked dimensions are only valid for internal use

C
Diese Maße werden bei Abnahme besonders geprüft
Ausschließlich Prüfmaße
Mit /E gekennzeichnete Maße sind nur für interne Zwecke gültig

F

Weitere Daten siehe KATALOG oder eKatalog
additional data see CATALOG or eCATALOG
www.wieland-electric.com
eshop.wieland-electric.com

Tolerierung Size ISO 14405 © / Tolerance system Size ISO 14405 ©. (This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).					ja/yes ☒ Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten. Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!							
Freitoleranz nach General tolerance			CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed			1. Verwendung: First Use:		Blatt: 1 von 1 Sheet: 1 of 1				
	/		Werkstoff / Material			Tag/Date	Name		Zeichnung Nr. / Drawing No.	Index		
	/				gezeichnet drawn	18.09.2025	Sachs (extern)					
	/				Maßstab / Scale		Elektronische Freigabe Electronic Release				5D.S25.1655.0 13K	
	/				1:1							
	/					Maße in mm / Dimensions are in mm						
	/	Vol.	mm ³	Dfl./Srf.	mm ²	Ersatz für / Replacement for:						
	/	 wieland				Type		Benennung/Title HOCHSTROMKLEMME high current terminal				
	/											
Index	Datum / Blatt Date / Sheet											
Änderung / Revision												

Bestell-Nr. /order no.	Typ /type	Farbe /colour
5D.S25.1655.0	WRTN 25 U	grau / grey