


Data sheet

Commercial Art.No.: 5D.S97.0055.5

feed-through terminal WTN 150 RT

feed-through terminal WTN 150 RT rated voltage 1000 V, rated current 309 A, screw connection, number of levels 1, number of clamp positions per level 2, nominal cross section 150 mm², connectable conductor cross section fine stranded without cable end sleeve 35mm² - 150mm², mounting method DIN rail (top hat rail), color red, width/grid dimension 31 mm, inflammability class of insulation material acc. with ul94 V0

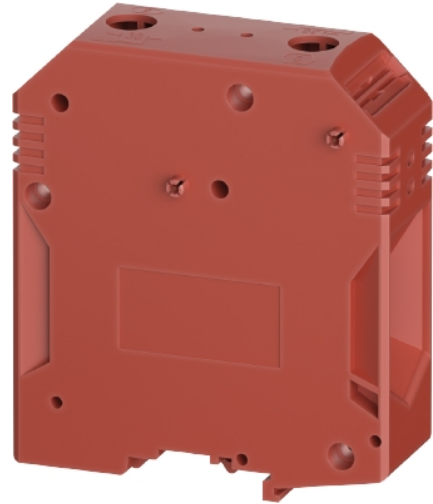

Commercial Art.No.	5D.S97.0055.5
EAN	4049088725777
Order Unit	5

certificates / approvals



Technical data

general

nominal cross section	150 mm ²
color	red
number of levels	1
number of clamp positions per level	2
width/grid dimension	31 mm
insulating housing	PA
inflammability class of insulation material acc. with UL94	V0
mounting method	DIN rail (top hat rail)

technical data

rated current	309 A
rated voltage	1000 V
rated impulse voltage	8 kV
pollution degree	3
closing plate required	no
type of insulation material	thermoplastic
length	93 mm
width	31 mm

connection data

connection type	screw connection
connection type 1	screw connection

connection type 2	screw connection
minimum cross section solid	35 mm ²
maximum cross section solid	150 mm ²
minimum cross section fine stranded	35 mm ²
maximum cross section fine stranded	150 mm ²
wire strip length	36 mm
torque conductor mounting	19 Nm

technical data UL/CSA

cross section UL	8-3/0 AWG
voltage UL	600 V
current factory wiring	275 A
current field wiring	275 A
cross section CSA	8-3/0 AWG
voltage CSA	600 V
current CSA	275 A

classification

ETIM 9.0	EC000897
----------	----------

product compliance

REACH-SVHC conformity status	compliant
------------------------------	-----------

Accessories


Commercial Art.No.:	Article-type description:	Description:
0D.202.7281.0	marking strips WML 9.8/60	marking strips WML 9.8/60 color white
0D.210.7056.0	marking plate WMP 10-10	marking plate WMP 10-10 modular spacing 10 mm, color white

A
© Alle Rechte vorbehalten
© All rights reserved
Vertraulichkeitsklasse
Confidentiality Class.

B
These dimensions will be especially checked at delivery
Only inspection dimensions
With /E marked dimensions are only valid for internal use



C
Diese Maße werden bei Abnahme besonders geprüft
Ausschließlich Prüfmaße
Mit /E gekennzeichnete Maße sind nur für interne Zwecke gültig

F

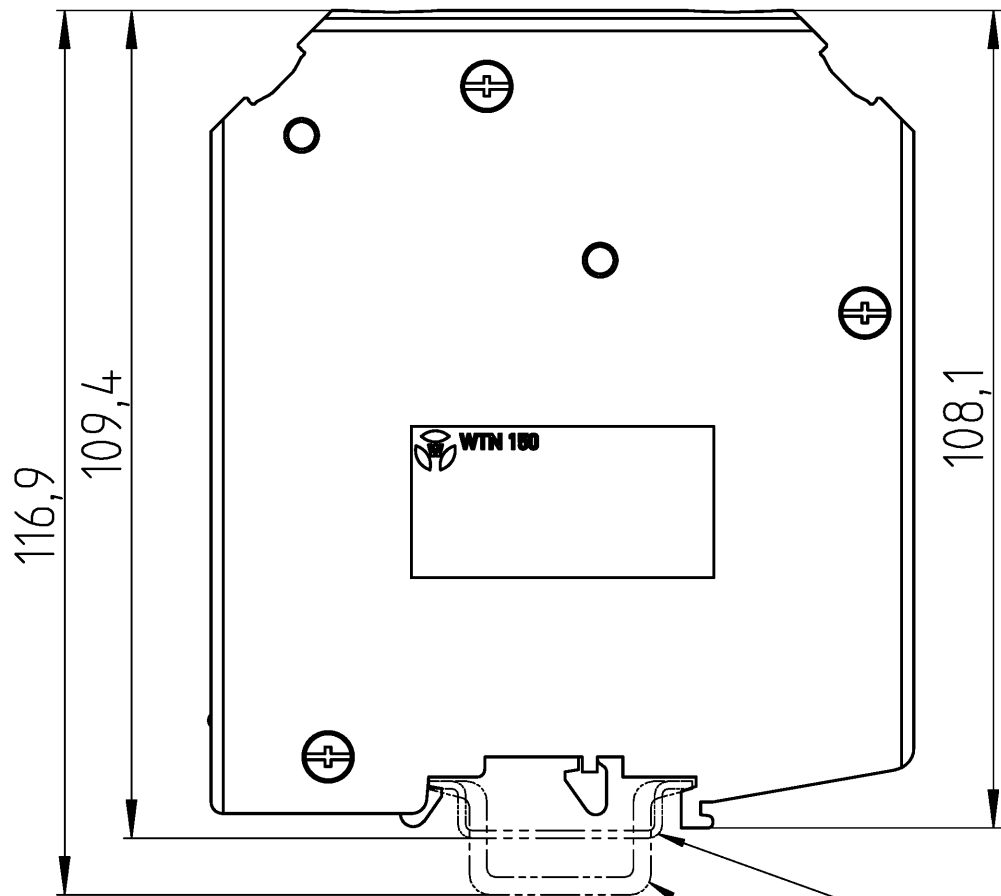

Hutschiene EN 60715-35x7,5
/mounting rail EN 60715-35x7,5

Hutschiene EN 60715-35x15
/mounting rail EN 60715-35x15

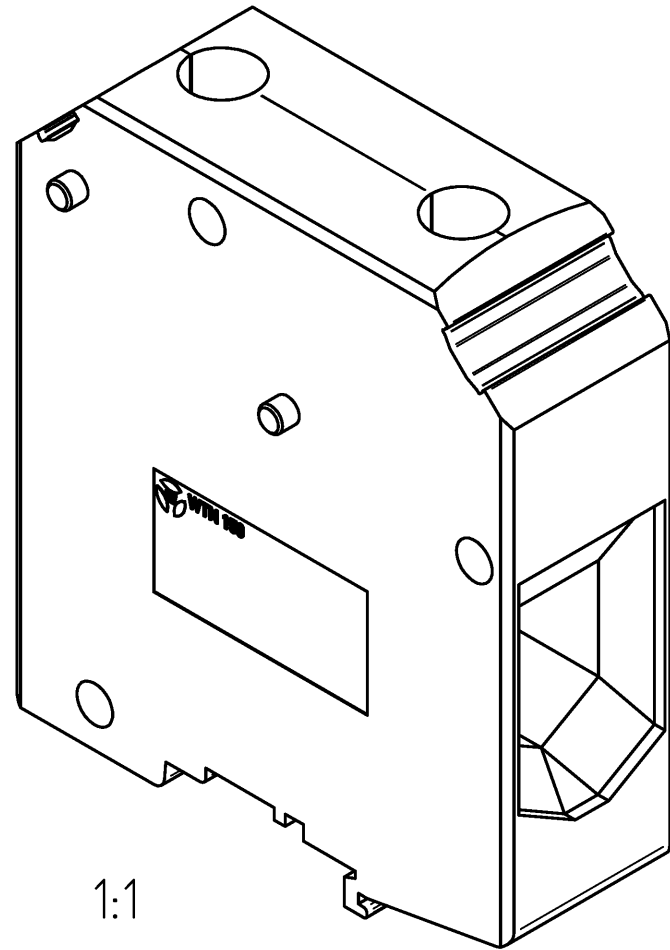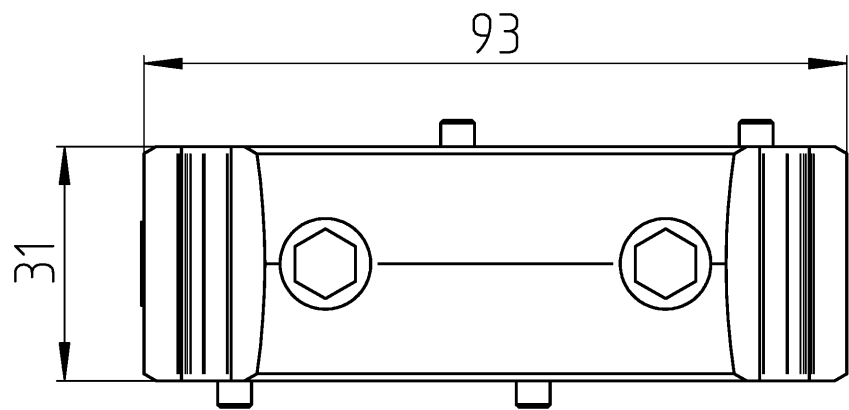

1:1

Weitere Daten siehe KATALOG oder eKatalog
additional data see CATALOG or eCATALOG
www.wieland-electric.com
eshop.wieland-electric.com

Tolerierung Size ISO 14405 © / Tolerance system Size ISO 14405 ©. (This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).				ja/yes ☒ Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten. Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!					
Freitoleranz nach General tolerance			CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed		1. Verwendung: First Use:		Blatt: Sheet: 1 von 1 of 1		
		Werkstoff / Material		Tag/Date		Name		Zeichnung Nr. / Drawing No.	Index
				gezeichnet drawn 24.10.2025		Burger			
		Maßstab / Scale 1:1		Elektronische Freigabe Electronic Release				T 5D.S97.0055.0 13K	
				Ersatz für / Replacement for:				Maße in mm / Dimensions are in mm	
		Vol. mm³		Dfl./Srf. mm²					
				Type		Benennung/Title			
				wieland		DURCHGANGSKLEMME earth terminal			
Index		Datum / Blatt Date / Sheet							
Änderung / Revision									

Bestell-Nr. /order no.	Typ /type	Farbe /colour
5D.S97.0055.0	WTN 150	grau/grey
5D.S97.0055.5	WTN 150 RT	rot/red
5D.S97.0055.6	WTN 150 BL	blau/blue