


## Data sheet

Commercial Art.No.: 0D.S23.3527.0

insert bridge IVB WTN 2.5-5 IN

insert bridge IVB WTN 2.5-5 IN modular spacing 5.1 mm, insulated yes, number of poles 5, color grey, height 19 mm, mounting method screwable, inflammability class of insulation material acc. with ul94 V0

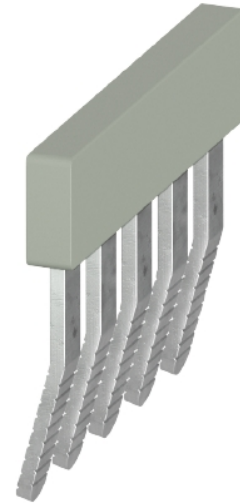

Commercial Art.No.	0D.S23.3527.0
EAN	4049088723896
Order Unit	100

## Technical data

### general

color	grey
inflammability class of insulation material acc. with UL94	V0
width/grid dimension	25 mm
length	2.4 mm
modular spacing	5.1 mm
number of bridged clamps	5
mounting method	screwable
insulated	yes
model	cross connector
height	19 mm

### classification

ETIM 9.0	EC000489
----------	----------



### product compliance

REACH-SVHC conformity status	compliant
------------------------------	-----------

A  
 © Alle Rechte vorbehalten  
 © All rights reserved  
 Vertraulichkeitsklasse  
 Confidentiality Class: Vertraulich  
 Confidential

B  
 These dimensions will be especially checked at delivery  
 Only inspection dimensions  
 With /E marked dimensions are only valid for internal use

C  
 Diese Maße werden bei Abnahme besonders geprüft  
 Ausschließlich Prüfmaße  
 Mit /E gekennzeichnete Maße sind nur für interne Zwecke gültig

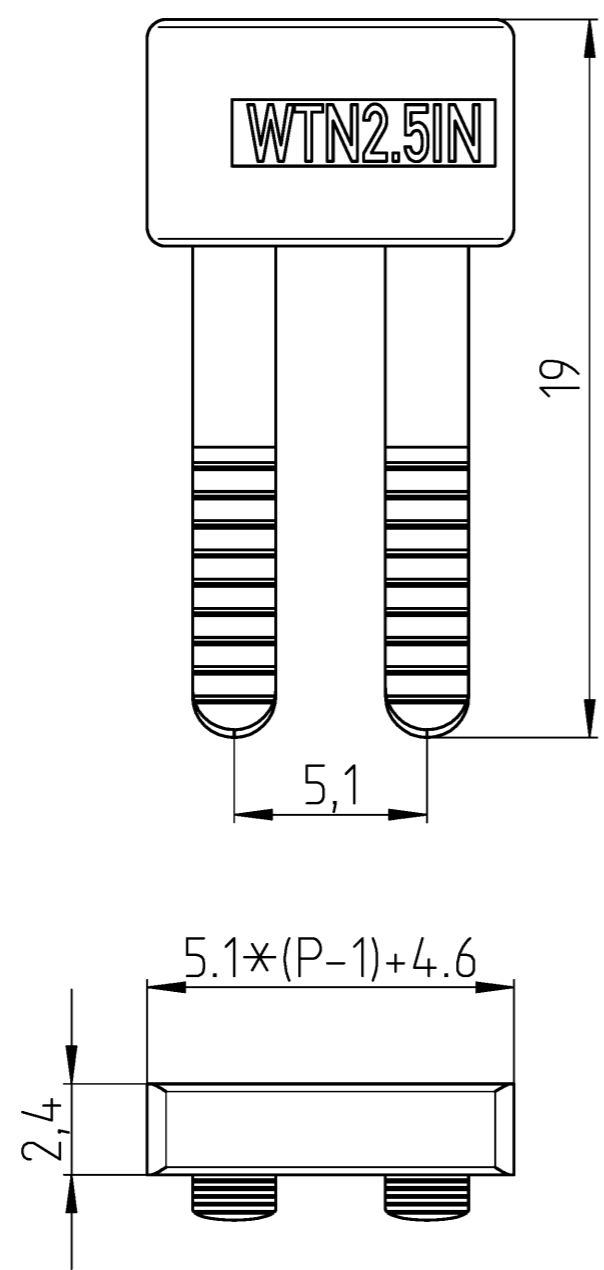

Weitere Daten siehe KATALOG oder eKatalog  
 additional data see CATALOG or eCATALOG  
[www.wieland-electric.com](http://www.wieland-electric.com)  
[eshop.wieland-electric.com](http://eshop.wieland-electric.com)

Tolerierung Size ISO 14405 © / Tolerance system Size ISO 14405 ©.  
 (This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).  
 ja/yes  Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten.  
 Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!

Freitoleranz nach General tolerance CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed 1. Verwendung: First Use: Blatt: 1 von 1 Sheet: 1 of 1

Werkstoff / Material		Tag/Date	Name	Zeichnung Nr. / Drawing No.	Index
Maßstab / Scale		gezeichnet / drawn	Eichhorn N.		
5:1		Elektronische Freigabe Electronic Release		T OD.S23.3227.0 13K	Maße in mm / Dimensions are in mm
Vol. mm <sup>3</sup> / OfL./Srf. mm <sup>2</sup>		Ersatz für / Replacement for:			
		Type	Benennung/Title		
Änderung / Revision		<b>EINLEGEBRUECKE</b> connection plug			

Bestell-Nr. /order no.	Polzahl P /number of poles P	Typ /type	Farbe /colour	VPE: packaging unit:
0D.S23.3227.0	2	IVB WTN 2.5-2 IN	grau / grey	250
0D.S23.3327.0	3	IVB WTN 2.5-3 IN	grau / grey	200
0D.S23.3427.0	4	IVB WTN 2.5-4 IN	grau / grey	
0D.S23.3527.0	5	IVB WTN 2.5-5 IN	grau / grey	100
0D.S23.4027.0	10	IVB WTN 2.5-10 IN	grau / grey	