

Data sheet

Commercial Art.No.: 0D.ST3.3227.0

insert bridge IVB WTN 2.5-2 TS15

insert bridge IVB WTN 2.5-2 TS15 modular spacing 5.1 mm, insulated yes,number of poles 2, color grey, height 16.5 mm, mounting methodscrewable, inflammability class of insulation material acc. with ul94 V0



Commercial Art.No.	0D.ST3.3227.0
EAN	4049088724190
Order Unit	250

Technical data

general

color	grey
inflammability class of insulation material acc. with UL94	V0
width/grid dimension	9.7 mm
length	2.4 mm
modular spacing	5.1 mm
number of bridged clamps	2
mounting method	screwable
insulated	yes
model	cross connector
height	16.5 mm

classification

ETIM 9.0	EC000489
----------	----------



product compliance

REACH-SVHC conformity status	compliant
------------------------------	-----------

A
 © Alle Rechte vorbehalten
 © All rights reserved
 Vertraulichkeitsklasse
 Confidentiality Class: Vertraulich
 Confidential

B
 These dimensions will be especially checked at delivery
 Only inspection dimensions
 With /E marked dimensions are only valid for internal use

C
 Diese Maße werden bei Abnahme besonders geprüft
 Ausschließlich Prüfmaße
 Mit /E gekennzeichnete Maße sind nur für interne Zwecke gültig

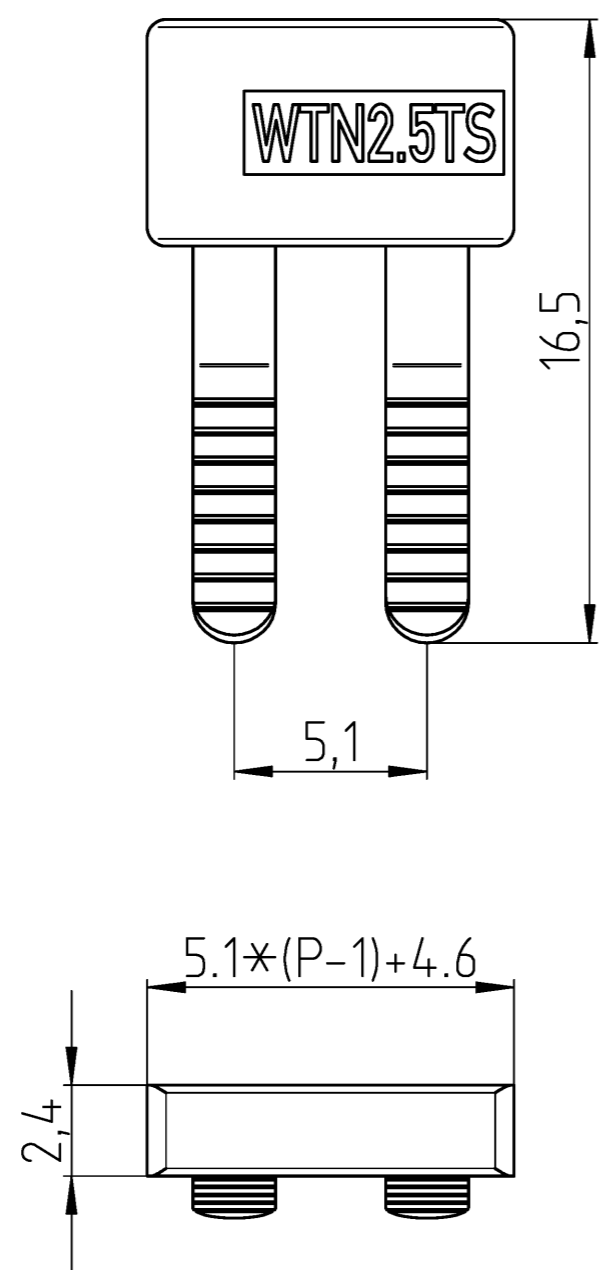

Weitere Daten siehe KATALOG oder eKatalog
 additional data see CATALOG or eCATALOG
www.wieland-electric.com
eshop.wieland-electric.com

Tolerierung Size ISO 14405 © / Tolerance system Size ISO 14405 ©.
 (This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).
 ja/yes Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten.
 Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!

Freitoleranz nach General tolerance CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed 1. Verwendung: First Use: Blatt: 1 von 1 Sheet: 1 of 1

Bestell-Nr. /order no.	Polzahl P /number of poles P	Typ /type	Farbe /colour	VPE: packaging unit:
0D.ST3.3227.0	2	IVB WTN 2.5-2 IN TS15	grau / grey	250
0D.ST3.3327.0	3	IVB WTN 2.5-3 IN TS15	grau / grey	200
0D.ST3.3427.0	4	IVB WTN 2.5-4 IN TS15	grau / grey	200
0D.ST3.3527.0	5	IVB WTN 2.5-5 IN TS15	grau / grey	100
0D.ST3.4027.0	10	IVB WTN 2.5-10 IN TS15	grau / grey	100

Werkstoff / Material	Tag/Date	Name	Zeichnung Nr. / Drawing No.	Index
	gezeichnet drawn	08.10.2025		
Maßstab / Scale	5:1		T 0D.ST3.3227.0 13K	Maße in mm / Dimensions are in mm
Vol.	mm ³ /Ofl./Srf.	mm ²		
wieland		Type	Benennung/Title	
Index	Datum / Blatt Date / Sheet	EINLEGEBRUECKE connection plug		
Änderung / Revision				