

Data sheet

Commercial Art.No.: 0D.ST3.3327.0

insert bridge IVB WTN 2.5-3 TS15

insert bridge IVB WTN 2.5-3 TS15 modular spacing 5.1 mm, insulated yes,number of poles 3, color grey, height 16.5 mm, mounting methodscrewable, inflammability class of insulation material acc. with ul94 V0



Commercial Art.No.	0D.ST3.3327.0
EAN	4049088724206
Order Unit	200

Technical data

general

color	grey
inflammability class of insulation material acc. with UL94	V0
width/grid dimension	14.8 mm
length	2.4 mm
modular spacing	5.1 mm
number of bridged clamps	3
mounting method	screwable
insulated	yes
model	cross connector
height	16.5 mm

classification

ETIM 9.0	EC000489
----------	----------



product compliance

REACH-SVHC conformity status	compliant
------------------------------	-----------

A
 © Alle Rechte vorbehalten
 © All rights reserved
 Vertraulichkeitsklasse
 Confidentiality Class: Vertraulich
 Confidential

B
 These dimensions will be especially checked at delivery
 Only inspection dimensions
 With /E marked dimensions are only valid for internal use

C
 Diese Maße werden bei Abnahme besonders geprüft
 Ausschließlich Prüfmaße
 Mit /E gekennzeichnete Maße sind nur für interne Zwecke gültig

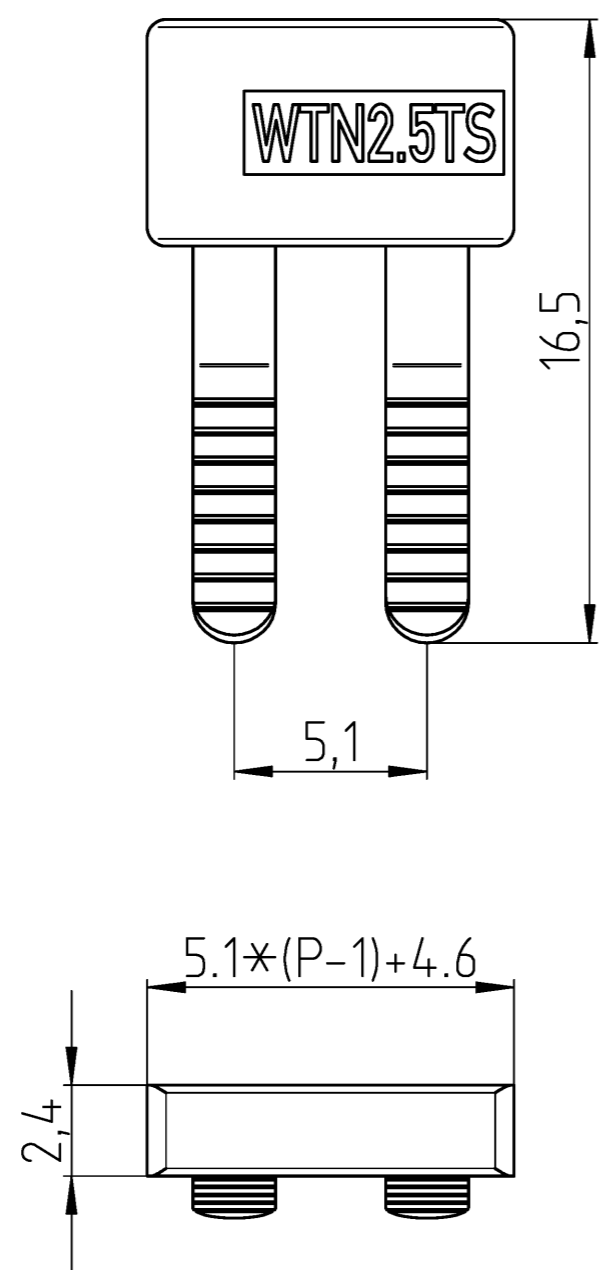

Weitere Daten siehe KATALOG oder eKatalog
 additional data see CATALOG or eCATALOG
www.wieland-electric.com
eshop.wieland-electric.com

Tolerierung Size ISO 14405 © / Tolerance system Size ISO 14405 ©.
 (This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).
 ja/yes Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten.
 Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!

Freitoleranz nach General tolerance CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed 1. Verwendung: First Use: Blatt: 1 von 1 Sheet: 1 of 1

Bestell-Nr. /order no.	Polzahl P /number of poles P	Typ /type	Farbe /colour	VPE: packaging unit:
0D.ST3.3227.0	2	IVB WTN 2.5-2 IN TS15	grau / grey	250
0D.ST3.3327.0	3	IVB WTN 2.5-3 IN TS15	grau / grey	200
0D.ST3.3427.0	4	IVB WTN 2.5-4 IN TS15	grau / grey	200
0D.ST3.3527.0	5	IVB WTN 2.5-5 IN TS15	grau / grey	100
0D.ST3.4027.0	10	IVB WTN 2.5-10 IN TS15	grau / grey	100

Werkstoff / Material Tag/Date Name gezeichnet drawn 08.10.2025 Eichhorn N.	Zeichnung Nr. / Drawing No. T 0D.ST3.3227.0 13K Maße in mm / Dimensions are in mm	Index Datum / Blatt Date / Sheet Änderung / Revision		Typ Benennung/Title EINLEGEBRUECKE connection plug