


Data sheet

Commercial Art.No.: 5D.SB4.4155.0

cutting clamp WTN 4 S TK

cutting clamp WTN 4 S TK rated voltage 800 V, rated current 32 A, screwconnection, number of levels 1, number of clamp positions per level 3, nominal cross section 4 mm², connectable conductor cross section finestranded without cable end sleeve 0,34mm² - 4mm², mounting method DINrail (top hat rail), color grey, width/grid dimension 6.1 mm, inflammability class of insulation material acc. with ul94 V0

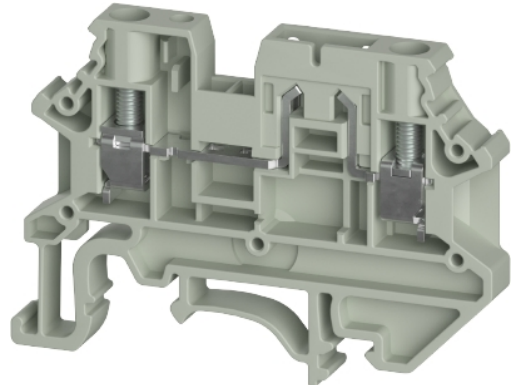

Commercial Art.No.	5D.SB4.4155.0
EAN	4049088725913
Order Unit	100

certificates / approvals



Technical data

general

nominal cross section	4 mm ²
color	grey
number of levels	1
number of clamp positions per level	3
width/grid dimension	6.1 mm
insulating housing	PA
inflammability class of insulation material acc. with UL94	V0
mounting method	DIN rail (top hat rail)
Anschlussart	screw connection
Anzahl der Klemmstellen je Etage	3
Montageart	DIN rail (top hat rail)
Brennbarkeitsklasse des Isolierstoffs	V0

technical data

rated current	32 A
rated voltage	800 V
rated impulse voltage	8 kV
pollution degree	3
closing plate required	yes
type of insulation material	thermoplastic
length	101.3 mm
width	6.1 mm
height	54.3 mm

connection data

connection type	screw connection
-----------------	------------------

connection type 1	screw connection
minimum cross section solid	0.34 mm ²
maximum cross section solid	4 mm ²
minimum cross section fine stranded	0.34 mm ²
maximum cross section fine stranded	4 mm ²
minumum conductor cross section (flex., stranded) with cable end sleeve	0.5 mm ²
maximum conductor cross section (flex., stranded) with cable end sleeve	2.5 mm ²
wire strip length	10 mm
torque conductor mounting	0.5 Nm

technical data UL/CSA

cross section UL	22-10 AWG
voltage UL	600 V
current factory wiring	30 A
current field wiring	30 A
cross section CSA	22-10 AWG
voltage CSA	600 V
current CSA	30 A

classification

ETIM 9.0	EC000902
----------	----------


product compliance

REACH-SVHC conformity status	compliant
------------------------------	-----------

Accessories

Commercial Art.No.:	Article-type description:	Description:
0D.S04.3227.5	jumper bar IVB WTN 4-2	jumper bar IVB WTN 4-2 modular spacing 6.1 mm, insulated yes, number of poles 2, color red, height 19.7 mm, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S04.3327.5	jumper bar IVB WTN 4-3	jumper bar IVB WTN 4-3 modular spacing 6.1 mm, insulated yes, number of poles 3, color red, height 19.7 mm, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S04.3427.5	jumper bar IVB WTN 4-4	jumper bar IVB WTN 4-4 modular spacing 6.1 mm, insulated yes, number of poles 4, color red, height 19.7 mm, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S04.3527.5	jumper bar IVB WTN 4-5	jumper bar IVB WTN 4-5 modular spacing 6.1 mm, insulated yes, number of poles 5, color red, height 19.7 mm, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.S04.4027.5	jumper bar IVB WTN 4-10	jumper bar IVB WTN 4-10 modular spacing 6.1 mm, insulated yes, number of poles 10, color red, height 19.7 mm, mounting method pluggable, inflammability class of insulation material acc. with ul94 V0
0D.202.7281.0	marking strips WML 9.8/60	marking strips WML 9.8/60 material plastic, color white, length 230 mm, height 15.1 mm, inflammability class of insulation material acc. with ul94 V0
0D.204.7056.0	marking plate WMP 6.10-10	marking plate WMP 6.10-10 modular spacing 6.1 mm, material plastic, color white, length 128 mm, height 76 mm, inflammability class of insulation material acc. with ul94 V0

0D.S05.3227.0	insert bridge IVB WTN 4-2 IN	insert bridge IVB WTN 4-2 IN modular spacing 6.1 mm, insulated yes,number of poles 2, color grey, height 20.3 mm, mounting methodscrewable, inflammability class of insulation material acc. with ul94 V0
0D.S05.3327.0	insert bridge IVB WTN 4-3 IN	insert bridge IVB WTN 4-3 IN modular spacing 6.1 mm, insulated yes,number of poles 3, color grey, height 20.3 mm, mounting methodscrewable, inflammability class of insulation material acc. with ul94 V0
0D.S05.3427.0	insert bridge IVB WTN 4-4 IN	insert bridge IVB WTN 4-4 IN modular spacing 6.1 mm, insulated yes,number of poles 4, color grey, height 20.3 mm, mounting methodscrewable, inflammability class of insulation material acc. with ul94 V0
0D.S05.3527.0	insert bridge IVB WTN 4-5 IN	insert bridge IVB WTN 4-5 IN modular spacing 6.1 mm, insulated yes,number of poles 5, color grey, height 20.3 mm, mounting methodscrewable, inflammability class of insulation material acc. with ul94 V0
0D.S05.4027.0	insert bridge IVB WTN 4-10 IN	insert bridge IVB WTN 4-10 IN modular spacing 6.1 mm, insulated yes,number of poles 10, color grey, height 20.3 mm, mounting methodscrewable, inflammability class of insulation material acc. with ul94 V0

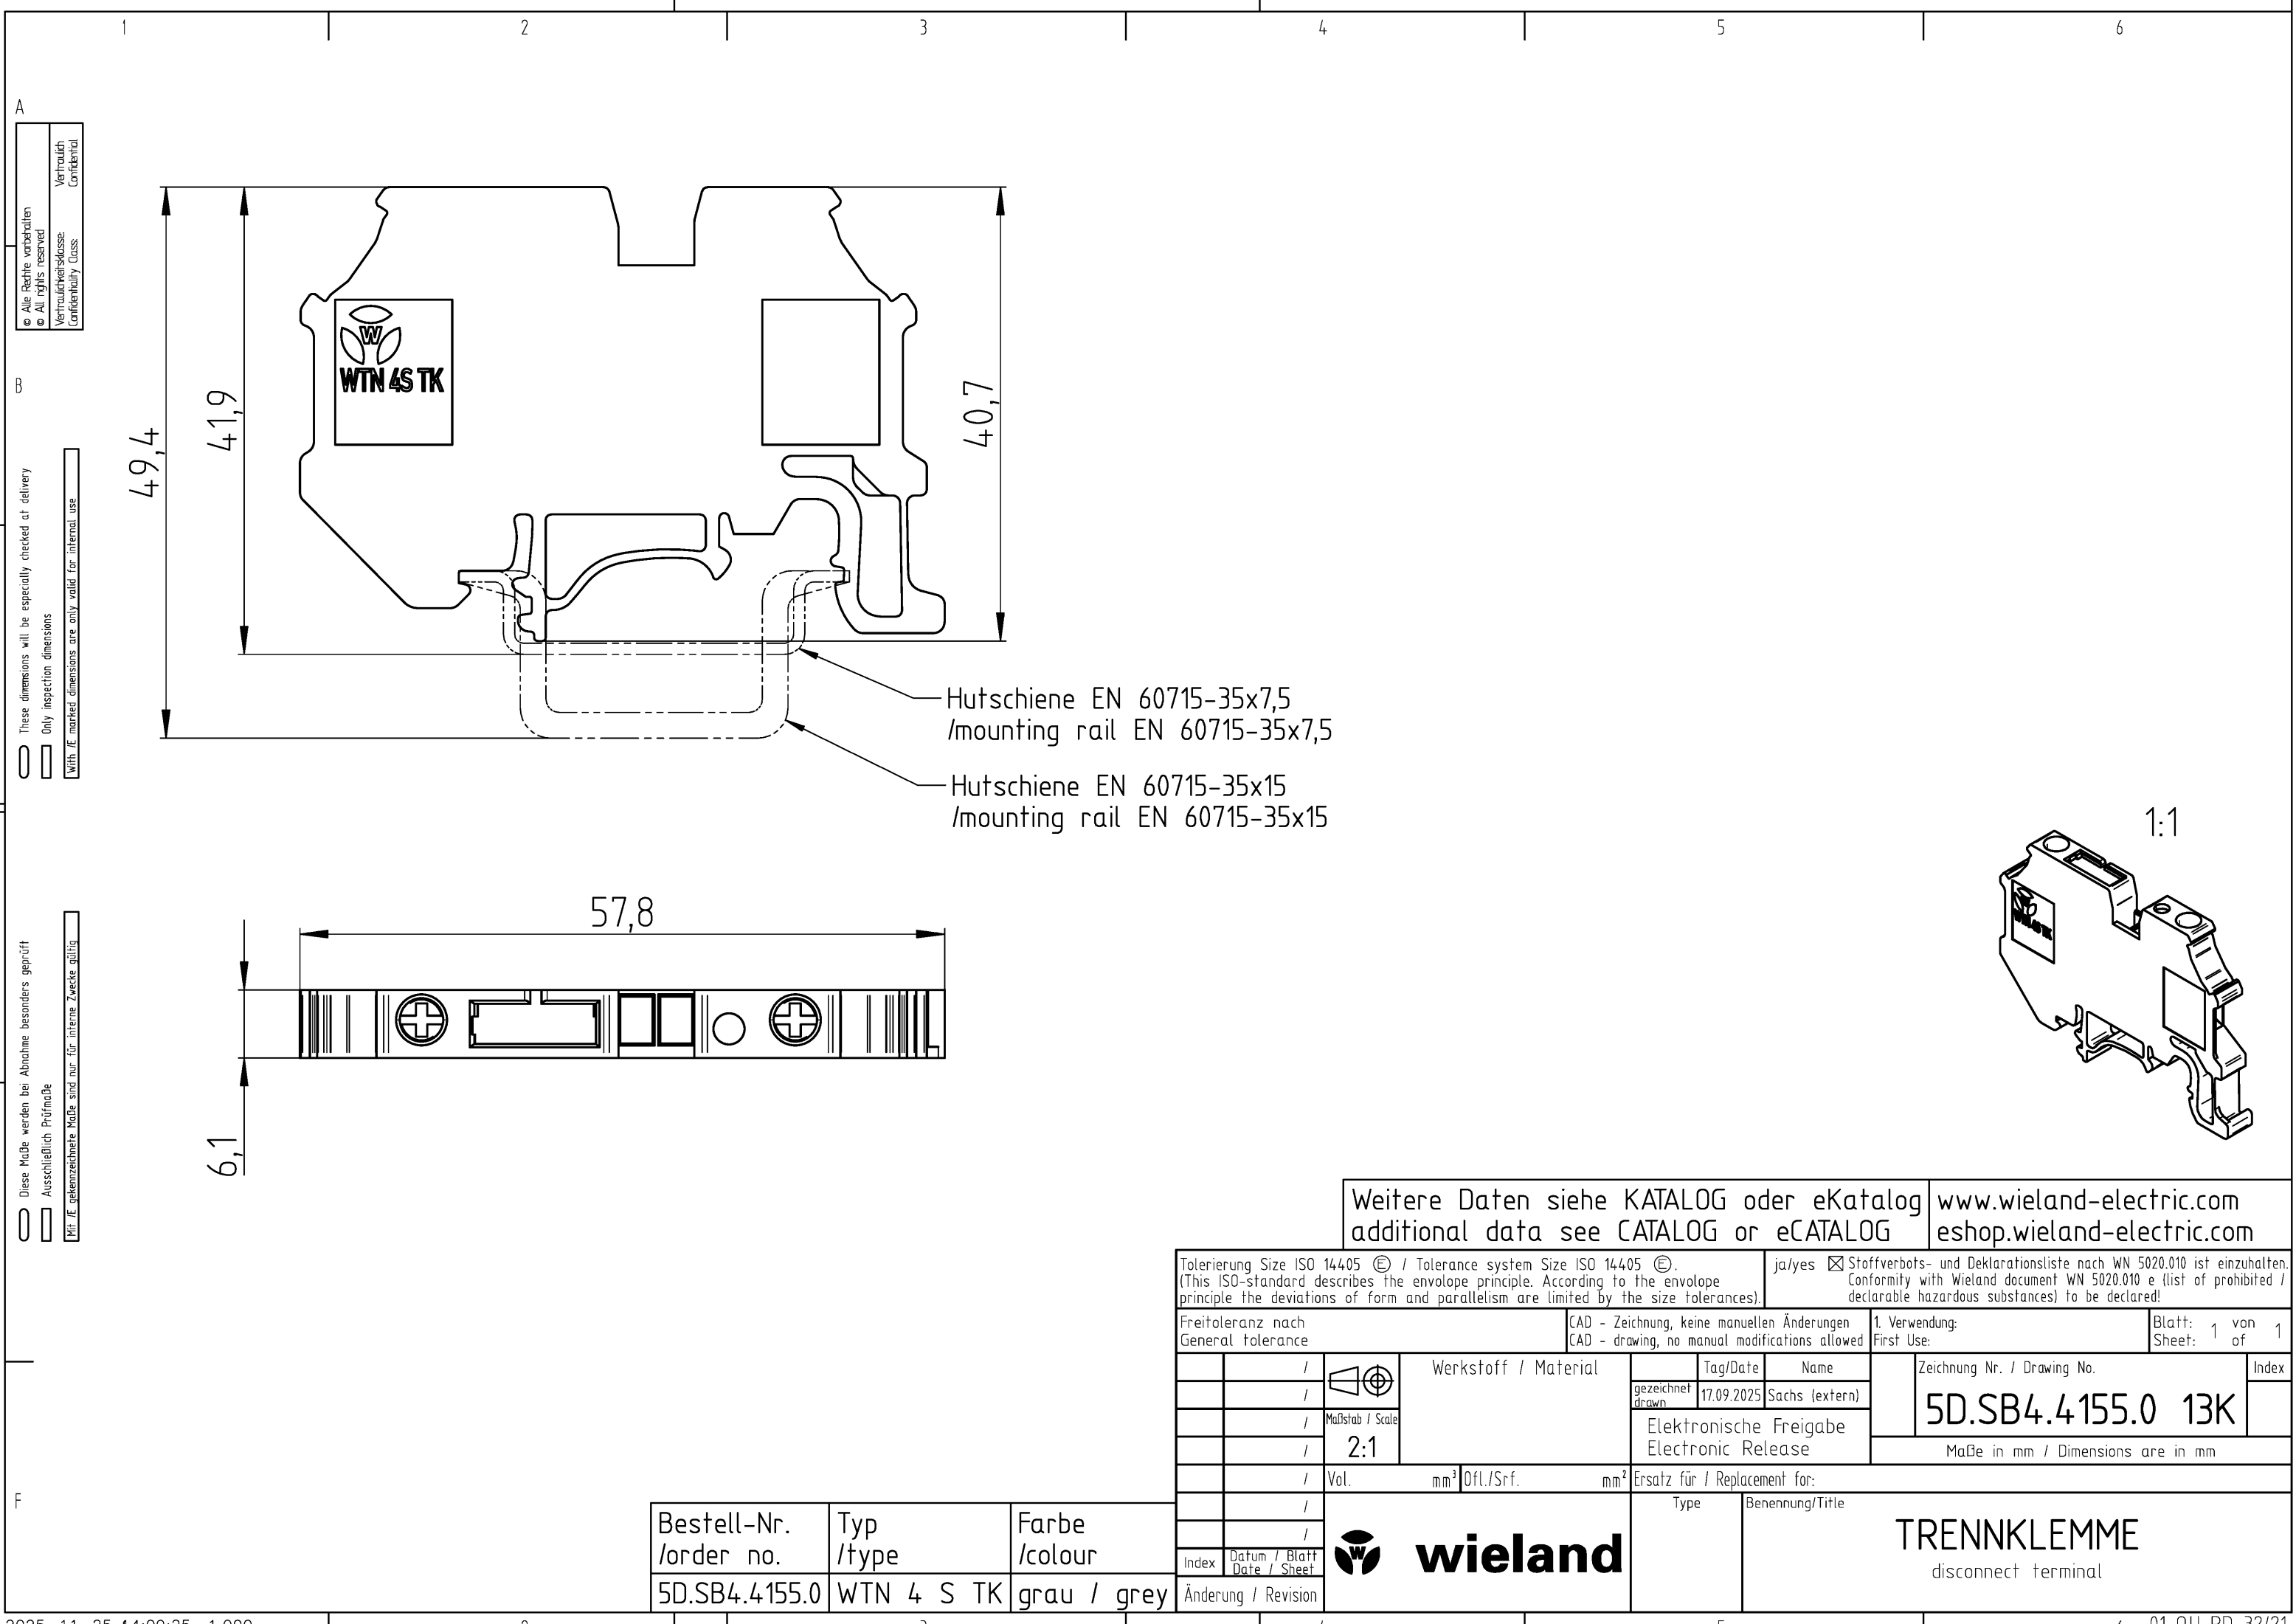

A
Alle Rechte vorbehalten
All rights reserved
Vertraulichkeitsklasse
Confidentiality Class
Vertraulich
Confidential

B
These dimensions will be especially checked at delivery
Only inspection dimensions
With /E marked dimensions are only valid for internal use

C
Diese Maße werden bei Abnahme besonders geprüft
Ausschließlich Prüfmaße
Mit /E gekennzeichnete Maße sind nur für interne Zwecke gültig

Weitere Daten siehe KATALOG oder eKatalog
additional data see CATALOG or eCATALOG
www.wieland-electric.com
eshop.wieland-electric.com

Tolerierung Size ISO 14405 © / Tolerance system Size ISO 14405 ©. (This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).					ja/yes ☒ Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten. Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!				
Freitoleranz nach General tolerance			CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed			1. Verwendung: First Use:		Blatt: 1 von 1 Sheet: 1 of 1	
	/		Werkstoff / Material		Tag/Date	Name		Zeichnung Nr. / Drawing No. 5D.SB4.4155.0 13K	Index
	/			gezeichnet drawn	17.09.2025	Sachs (extern)			
	/			Maßstab / Scale		Elektronische Freigabe Electronic Release			
	/			2:1					
	/	Vol. mm³		Ofl./Srf. mm²	Ersatz für / Replacement for:				
	/	 wieland			Type	Benennung/Title TRENNKLEMME disconnect terminal			
	/								
Index	Datum / Blatt Date / Sheet								
Änderung / Revision									