


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△		Drawing emend	Home	04/17/06"	
△		增加环保标示	Ye.j	10/30/07"	




Notes

- 1.pitch: 3.96mm
- poles:2-24p
- 2.Rated voltage: 300V
- 3.Rated current: 15A
4. Insulation resistance: 5000MΩ/DC1000V
5. Withstanding voltage: AC2000V/1Min
6. Temp. Range: -40° C~+105° C
- 7.Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						—
	over 6 to 10	over 10 to 24		over 6 to 30	over 30 to 90	over 90 to 200	over 200 to 480		∩
to 6			to 6						◇
±0.10	±0.15	±0.25	±0.1	±0.2	±0.3	±0.5	±0.7	±0.05/10	

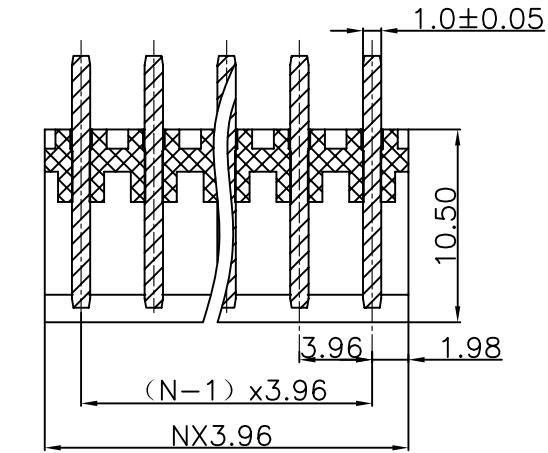

SECTION B-B

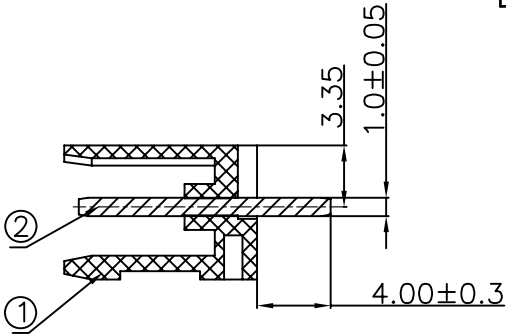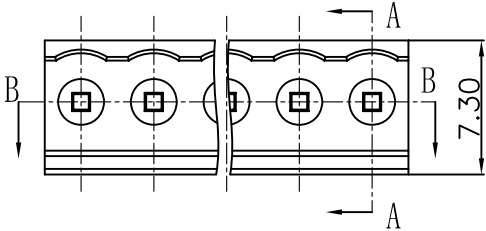

SECTION A-A

P.O. BOX 410 CIXI				
HT 396				

2	2EDGV-pin (1.0*13.7)	1007B00010(H)	XX	Brass	SnCe
1	HT396V Housing	1013A0YXXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
DETACHED LISTS	← MM (INCH) → TOLERANCES EXCEPT AS NOTED MM .0 ± .00 ± .000 ± ± ± ±		DFTO Zhuwm CHKD MFO APPVL MATERIAL :	DATE 01/11/05 DATE DATE DATE	 宁波高正电子有限公司 DEGSON[®] DEGSON ELECTRONICS CO., LTD NAME HT396V-3.96-XXP-1Y-00A(H) DRAWING NO. HT396V-E03 SIZE A3 REV T2 10/30/07 DO NOT SCALE DRAWING SHEET 1 OF 1
	ANGLES ± 1°  THIRD ANGLE PROJECTION		G.E : FINISH : SCALE : 1:1		