


# SR520-SR5200

## 5.0 AMP. Schottky Barrier Rectifiers

### DO-201AD

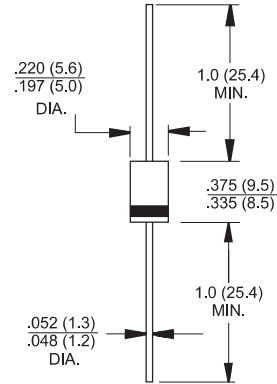

### Features

- Low power loss, high efficiency.
- High current capability, Low VF.
- High reliability
- High surge current capability.
- Epitaxial construction.
- Guard-ring for transient protection.
- For use in low voltage, high frequency inverter, free wheeling, and polarity protection application

### Mechanical Data

- Cases: DO-201AD/DO-27 molded plastic
- Polarity: Color band denotes cathode
- High temperature soldering guaranteed: 260°C/10 seconds/.375", (9.5mm) lead lengths at 5 lbs., (2.3kg) tension
- Weight: 1.2 grams

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60 Hz, resistive or inductive load.  
For capacitive load, derate current by 20%

Type Number	Symbol	SR 520	SR 530	SR 540	SR 550	SR 560	SR 590	SR 5100	SR 5200	Units
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	20	30	40	50	60	90	100	200	V
Maximum RMS Voltage	$V_{RMS}$	14	21	28	35	42	63	70	140	V
Maximum DC Blocking Voltage	$V_{DC}$	20	30	40	50	60	90	100	200	V
Maximum Average Forward Rectified Current See Fig. 1	$I_{(AV)}$	5.0								A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	$I_{FSM}$	120								A
Maximum Instantaneous Forward Voltage @5.0A	$V_F$	0.55		0.70		0.85			V	
Maximum D.C. Reverse Current @25°C at Rated DC Blocking Voltage @125°C	$I_R$	0.5			0.1			mA		
		15		10		5.0	1.0	mA		
Typical Junction Capacitance (Note 2)	$C_j$	250		210		120			pF	
Typical Thermal Resistance (Note 1)	$R_{\theta JA}$	35			10			°C/W		
	$R_{\theta JC}$	2			2					
Operating Junction Temperature Range	$T_J$	-65 to +150								°C
Storage Temperature Range	$T_{STG}$	-65 to +150								°C

- Notes:
1. Mount on Cu-Pad Size 5mm x 5mm on P.C.B.
  2. Measured at 1 MHz and Applied Reverse Voltage of 4.0V D.C.

# SR520-SR5200

## 5.0 AMP. Schottky Barrier Rectifiers

### RATINGS AND CHARACTERISTIC CURVES

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

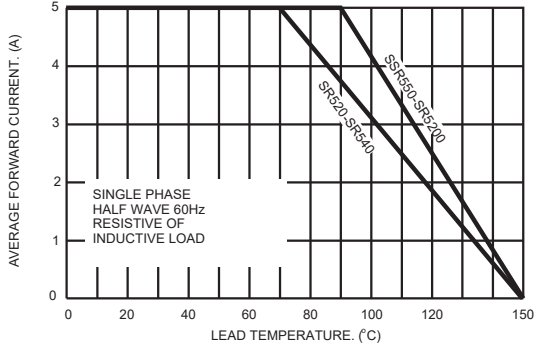


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

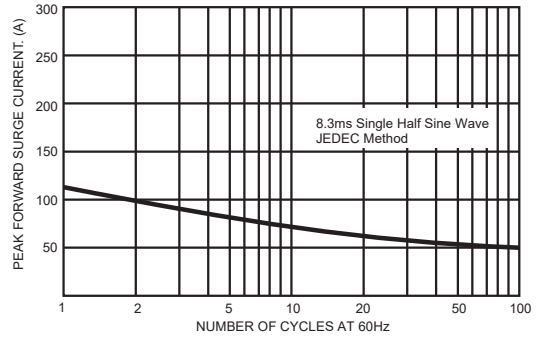


FIG.3- TYPICAL FORWARD CHARACTERISTICS

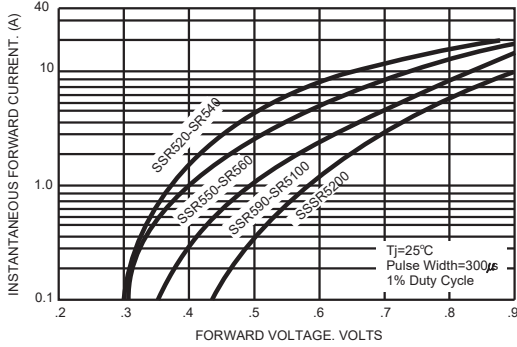


FIG.4- TYPICAL REVERSE CHARACTERISTICS

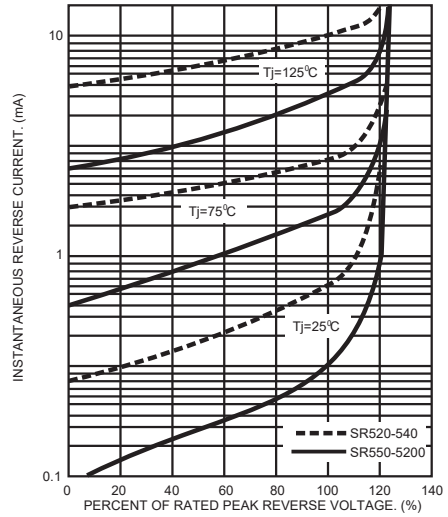


FIG.5- TYPICAL JUNCTION CAPACITANCE

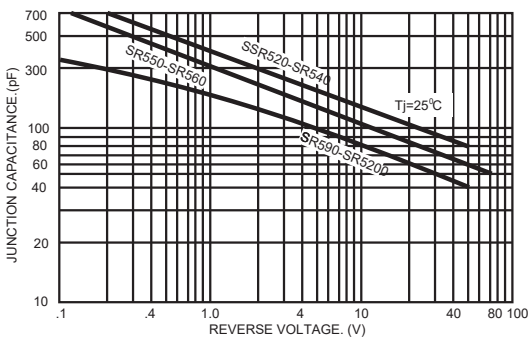


FIG.6- TYPICAL TRANSIENT THERMAL CHARACTERISTICS

