



REV	CONTENT	CHK	DATE
V0.0	CONTENT	SYJ	25.09.15

Electrical :

- 1. Operating Temperature : -40°C~+105°C
- 2. RoHS Compliance
- 3. "★" is the key quality control point

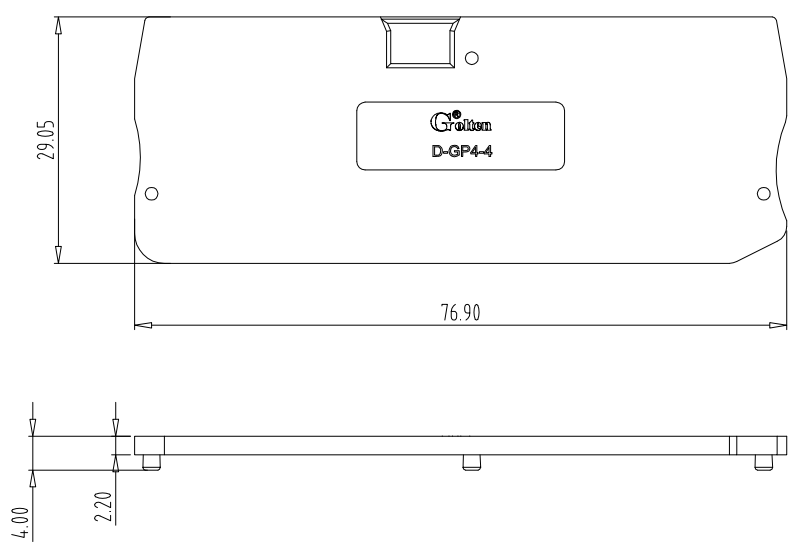

- ① Cover plate
- ② Series NO.
- ③ Wire diameter
- ④ Connection quantity
- ⑤ Color: GY-Grey, BU-Blue, BK-Black, GN-Green, OG-Orange, RD-Red, YE-Yellow, WH-White, PE-Yellow & Green, BE-Beige

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥	≡	—	//		
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 500	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 10	all	over 0	over 100	over 150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5		

1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	SYJ	DATE	25.09.15	SIZE	A4 UNITS mm SHEET/OF 1/1
CHK.	DATE			SCALE	1:1
APP.	DATE			NAME	D-GP4-4-X
宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.				DWGNO.	XXXX