

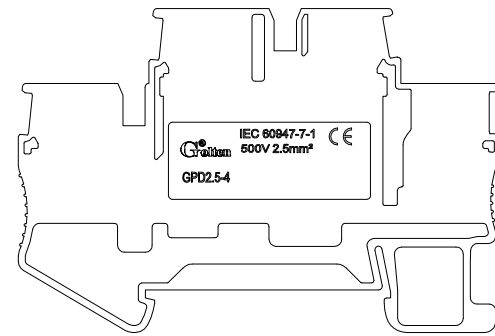



REV	CONTENT	CHK	DATE
V0.0	CONTENT	SYJ	25.09.09

Electrical :

	IEC	UL
1.Rated Voltage :	500V	300V
2.Rated Current :	24A	20A
3.Wire Range:	0.14-2.5mm <sup>2</sup>	26-12AWG
4.Stripping Length :	8-10mm	
5.Operating Temperature :	-40°C~+105°C	
6.RoHS Compliance		
7."★" is the key quality control point		

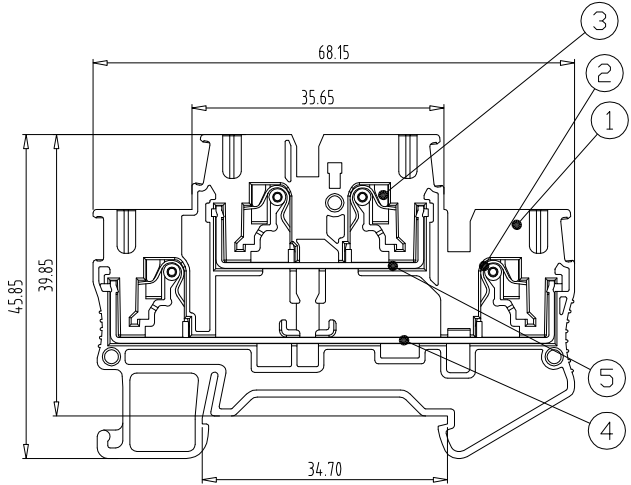

- ① Series NO.
- ② Wire diameter  
0.14-2.5mm<sup>2</sup>  
26-12AWG
- ③ Connection quantity
- ④ Color:  
GY-Grey  
BU-Blue  
BK-Black  
GN-Green  
OG-Orange  
RD-Red  
YE-Yellow  
WH-White  
PE-Yellow & Green  
BE-Beige



5	CONDUCTOR B	XX	1	Copper alloy	Tin Plated
4	CONDUCTOR A	XX	1	Copper alloy	Tin Plated
3	BUTTON	XX	4	PBT+GF	SEE NOTE
2	SPRING	XX	4	Stainless Steel	/
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SYJ	DATE	25.09.09	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.		DATE		SCALE	1:1
APP.		DATE		NAME <b>GPD2.5-4-X</b>	
<b>宁波冠泰电子有限公司</b> NINGBO GOLTEN ELECTRONICS CO., LTD.					

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥	≡	—	//		
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	250	350	500	0	30	53	70	90	115	150	200	250	320	0	10	all	0	100	150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5		