



## SPECIFICATION FOR APPROVAL

CUSTOMER: 寧波閃諾

EVERCOOL MODEL NO: EC12025H12BP

CUSTOMER MODEL NO: EC12025H12BP

DESCRIPTION: DC12V FAN

<b>APPROVED BY (AUTHORISED)</b>	<b>APPROVED</b>
	<b>Alex</b>
	<b>CHECKED</b>
	<b>Xiongwei</b>
	<b>DRAWN</b>
	<b>Chenjie</b>
	<b>SALES</b>
	<b>Serene</b>

\* Please confirm your acceptance by return fax or mail.

SPEC NO	ISSUE DATE	EDITION	REVISED DATE
20260409A05	2026/4/9	A0	2026/4/9

THE PRODUCTION ACCORD WITH EUROPE UNION ROHS STANDARD

### EVERCOOL THERMAL CO., LTD

NO. 123-8, HSING DE RD., SAN-CHUNG CITY,  
TAIPEI HSIEN, TAIWAN, R.O.C.

TEL: 886-2-8512-2889 FAX: 886-2-8512-2890

[URL:www.evercool.com.tw](http://www.evercool.com.tw)

[EMAIL: coolest@ms14.hinet.net](mailto:coolest@ms14.hinet.net)

# I. GENERAL SPECIFICATION

Item	Specification	
1.Part NO.	EC12025H12BP	
2.Outline Dimension	120*120*25	
3.Rated Voltage	12	VDC
4.Rated Current*	0.65	A
5.Rated Power Consumption*	7.8	W
6.Rated Speed*	1000RPM±25%~2600RPM±10%	
7.Airflow**	37.05CFM(ft3/min)	96.15CFM(ft3/min)
8.Static Pressure**	0.05In-H2O	0.3In-H2O
9.Noise Level***	<21.7dB(A)	<43.6dB(A)
10.Life Expectancy	50000 hrs at 25°C	
11.No of Polarity	4 Poles	
12.Direction of Rotation	Counter-Clockwise	

**Noted:**

**\*Input Current Speed Power Consumption**

Measured after continuous 30 minutes operation at rated voltage in free air at ambient temperature of 25 °C, 65% relative humidity

**\*\*Performance**

Measured with use of double chamber. The value are recorded when the fan speed is stabilized at rated voltage.

**\*\*\*Noise Level**

Measured at rated voltage in a semi-anechoic chamber with background noise below than 20 dB(A). The measuring distance is in one meter from microphone to inlet of the fan.

## II. ELECTRICAL SPECIFICATION

Item		Specification
1.Polarity Protection	✓ YES	Be capable of endurance when Vcc & GRD are exchanged
	NO	
2.Auto restart	✓ YES	Locked motor protection
	NO	
3.Insulation Resistance		10MΩ/b/w unshielded wire and frame at 500 VDC/min
4.Dielectric Strength		5Ma Max./Measured b/w lead wire and frame at 500VAC/min

## III. MAIN MATERIALS / PARTS SPECIFICATION

Item		Specification				
1.Materials of Frame		Thermoplastic PBT of UL 94V-0(BK)				
2.Materials of Fan Blade						
3.Bobbin						
4.Bearing	✓	Dual ball bearing				
		1 ball & 1 sleeve bearing				
		Sleeve bearing				
		EL bearing				
5.Lead wire	✓	Red(+)	UL#	1007	28	AWG
	✓	Black (-)	UL#	1007	28	AWG
	✓	Yellow(FG)	UL#	1007	28	AWG
	✓	Blue(PWM)	UL#	1007	28	AWG
6.Connector		2510 4P(並線)				

## IV. ENVIRONMENT SPECIFICATION

Item	Specification
1.Operation Temperature	-10°C~+70°C/66%(RH), high / low temperature test for 24 hours, temperature change: 30°C/hours.
2.Storage Temperature	-40°C~+70°C/66%(RH), high / low temperature test for 24 hours, temperature change: 30°C/hours.


## V. DROPPING TEST

Prepared in minimum packing condition, fan will withstand one drop each on three surfaces from 30 cm height onto a 10mm thick hard wooden board.

## VI. LABEL MARKING




## VII. OUTLINE DIMENSION

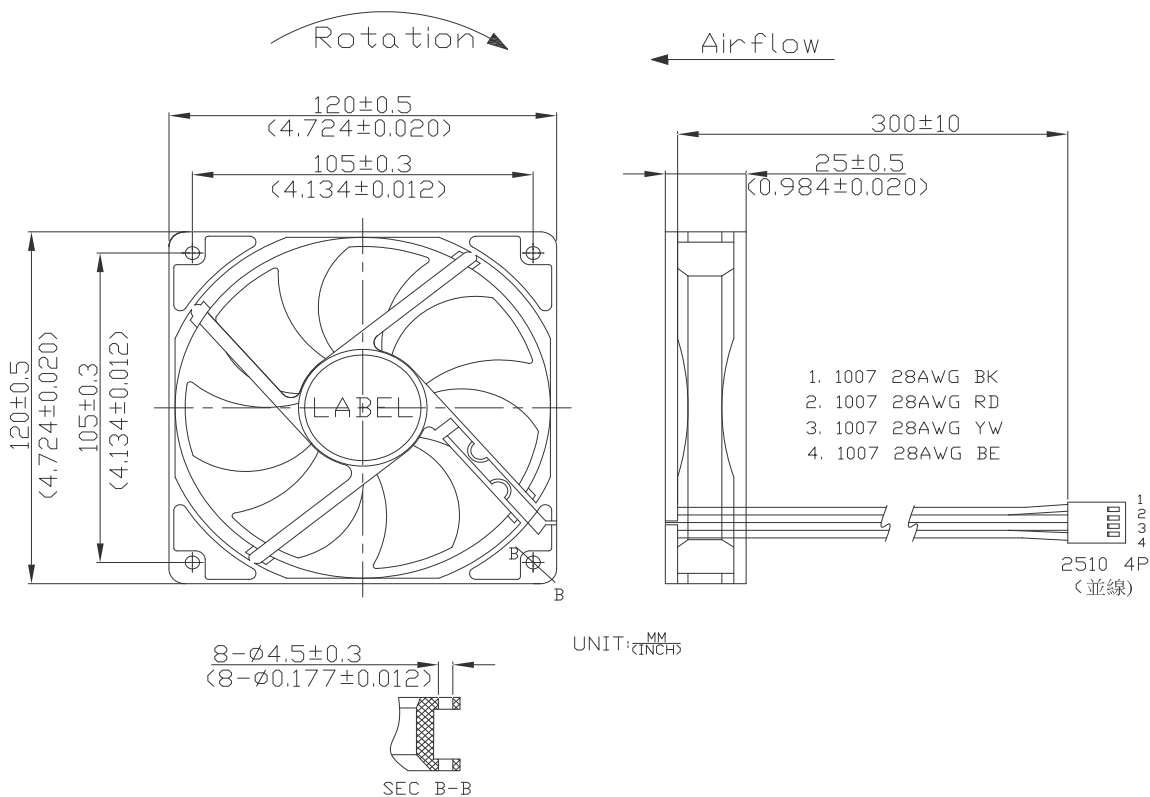

## VIII.PWM CONTROL SIGNAL:

Signal Voltage Range:-0.8-20VDC.

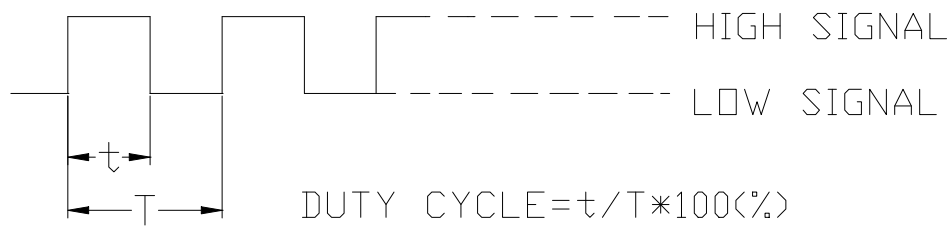

The frequency for control signal of the fan shall be able to accept a 18KHZ-32KHZ.

The preferred operating point for the fan is 25k HZ.

At 100% duty cycle ,The rotor will spin at maximum speed.

At 0% duty cycle , The rotor will spin at minimum speed.

The motor speed at different duty cycle is shown in the table below.

### SPEED VS PWM CONTROL SIGNAL:


(AT RATED VOLTAGE & PWM FREQUENCY=25KHZ)

DUTY CYCLE(%)	SPEED.PWM(REF)	CURRENT(A)TYP
100	2600±10%	0.65
75	2200±10%	0.25
50	1800±15%	0.18
25	1300±20%	0.08
0	1000±25%	0.05

# IX. Sensor Circuit System

## PWM CONTROL

In PWM speed control, a fixed frequency square wave is applied to the speed control lead wire of the fan. The ratio of the on time vs. the PWM period is proportional to the RPM.

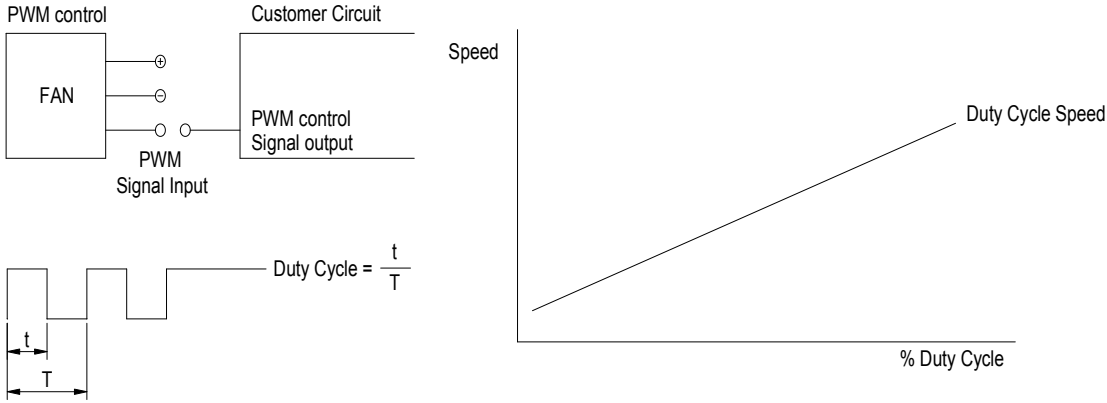

## PWM INPUT VOLTAGE RANGE:

High level= 2.8 to 20 VDC  
 Low level= 0 to 0.4 VDC


## PWM INPUT CURRENT (IPWM) RANGE:

40uA to 20mA

To control signal line of the fan shall be able to accept a 30Hz to 30kHz.  
 The preferred operating point for the fan is 0%~100% of duty cycle.



# X.Fan Duty Cycle Vs RPM Curve

12025duty cycle vs rpm curve  
 RPM

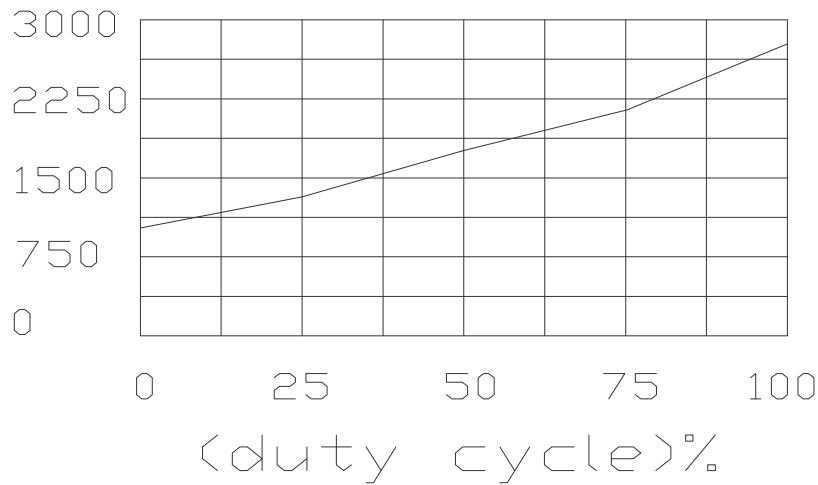


# VIII. Sensor Circuit System

Speed Sensor / Tachometer ( FG/F )

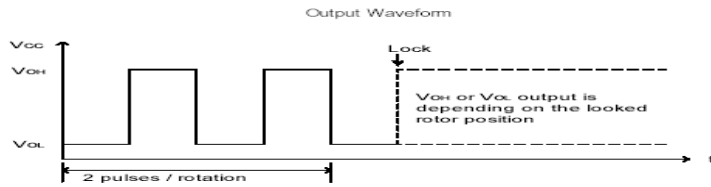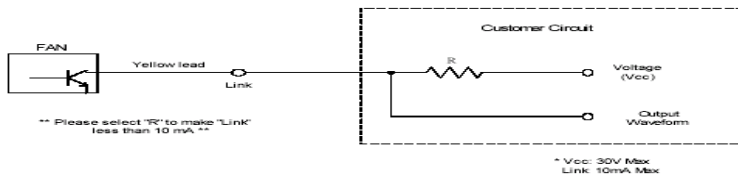

# XI. P/Q Performance

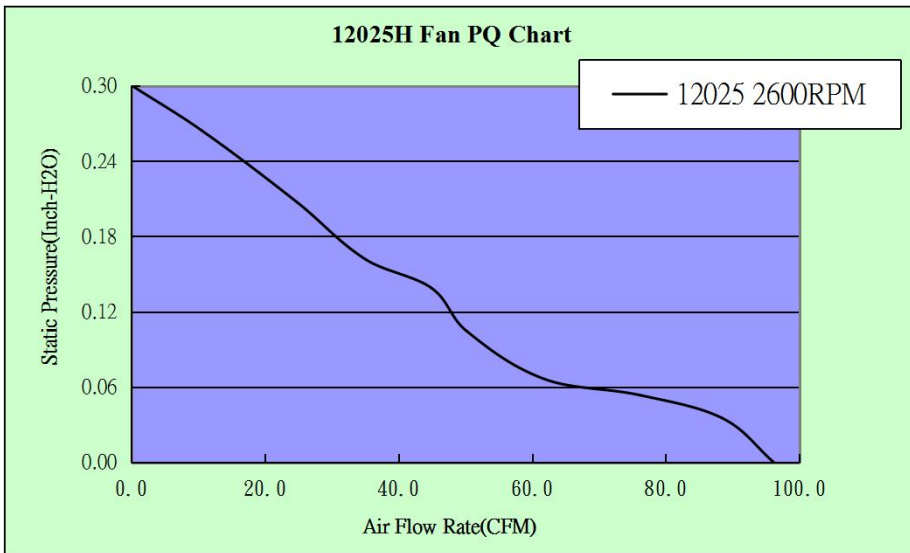

	Q(cfm)	Ps(InchH2o)
1	0.000	0.300
2	10.489	0.265
3	24.826	0.207
4	35.124	0.162
5	44.923	0.139
6	50.170	0.105
7	61.867	0.066
8	76.118	0.053
9	88.488	0.035
10	96.152	0.000