



## SPECIFICATION FOR APPROVAL

**CUSTOMER:** 寧波閃諾

**EVERCOOL MODEL NO:** EC4010H12BP

**CUSTOMER MODEL NO:** EC4010H12BP

**DESCRIPTION:** DC12V FAN

<b>APPROVED BY (AUTHORISED)</b>	<b>APPROVED</b>
	<b>Alex</b>
	<b>CHECKED</b>
	<b>Xiongwei</b>
	<b>DRAWN</b>
	<b>Chenjie</b>
	<b>SALES</b>
	<b>Serene</b>

\* Please confirm your acceptance by return fax or mail.

<b>SPEC NO</b>	<b>ISSUE DATE</b>	<b>EDITION</b>	<b>REVISED DATE</b>
20260409A08	2026/4/9	A0	2026/4/9

THE PRODUCTION ACCORD WITH EUROPE UNION ROHS STANDARD

**EVERCOOL THERMAL CO., LTD**

**NO. 123-8, HSING DE RD., SAN-CHUNG CITY,  
TAIPEI HSIEN, TAIWAN, R.O.C.**

**TEL: 886-2-8512-2889 FAX: 886-2-8512-2890**

**[URL:www.evercool.com.tw](http://www.evercool.com.tw)**

**[EMAIL: coolest@ms14.hinet.net](mailto:coolest@ms14.hinet.net)**

# I. GENERAL SPECIFICATION

Item	Specification	
1.Part NO.	EC4010H12BP	
2.Outline Dimension	40*40*10	
3.Rated Voltage	12	VDC
4.Rated Current*	0.08	A
5.Rated Power Consumption*	0.96	W
6.Rated Speed*	2000RPM±25%~5500RPM±10%	
7.Airflow**	2.08CFM(ft3/min)	5.75CFM(ft3/min)
8.Static Pressure**	0.02In-H2O	0.13In-H2O
9.Noise Level***	<10dB(A)	<23dB(A)
10.Life Expectancy	50000	hrs at 25°C
11.No of Polarity	4 Poles	
12.Direction of Rotation	Counter-Clockwise	

**Noted:**

**\*Input Current Speed Power Consumption**

Measured after continuous 30 minutes operation at rated voltage in free air at ambient temperature of 25 °C, 65% relative humidity

**\*\*Performance**

Measured with use of double chamber. The value are recorded when the fan speed is stabilized at rated voltage.

**\*\*\*Noise Level**

Measured at rated voltage in a semi-anechoic chamber with background noise below than 20 dB(A). The measuring distance is in one meter from microphone to inlet of the fan.

## II. ELECTRICAL SPECIFICATION

Item		Specification
1.Polarity Protection	✓ YES	Be capable of endurance when Vcc & GRD are exchanged
	NO	
2.Auto restart	✓ YES	Locked motor protection
	NO	
3.Insulation Resistance		10MΩ/b/w unshielded wire and frame at 500 VDC/min
4.Dielectric Strength		5Ma Max./Measured b/w lead wire and frame at 500VAC/min

## III. MAIN MATERIALS / PARTS SPECIFICATION

Item		Specification				
1.Materials of Frame		Thermoplastic PBT of UL 94V-0(BK)				
2.Materials of Fan Blade						
3.Bobbin						
4.Bearing	✓	Dual ball bearing				
		1 ball & 1 sleeve bearing				
		Sleeve bearing				
		EL bearing				
5.Lead wire	✓	Red (+)	UL#	1571	28	AWG
	✓	Black (-)	UL#	1571	28	AWG
	✓	Yellow(FG)	UL#	1571	28	AWG
	✓	Blue(PWM)	UL#	1571	28	AWG
6.Connector		2510 4P				


## IV. ENVIRONMENT SPECIFICATION

Item	Specification
1.Operation Temperature	-10°C~+70°C/66%(RH), high / low temperature test for 24 hours, temperature change: 30°C/hours.
2.Storage Temperature	-40°C~+70°C/66%(RH), high / low temperature test for 24 hours, temperature change: 30°C/hours.


## V. DROPPING TEST

Prepared in minimum packing condition, fan will withstand one drop each on three surfaces from 30 cm height onto a 10mm thick hard wooden board.

## VI. LABEL MARKING

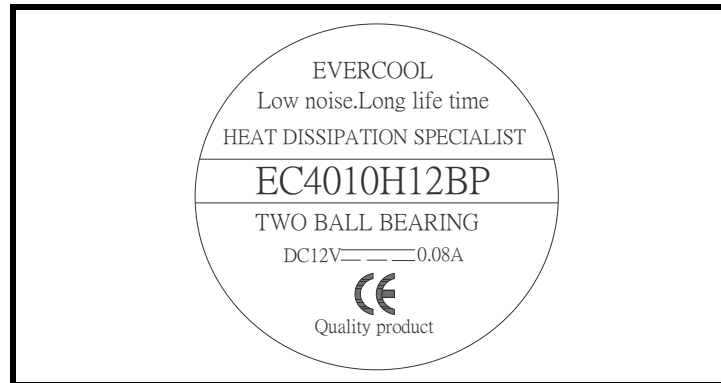


## VIII. OUTLINE DIMENSION

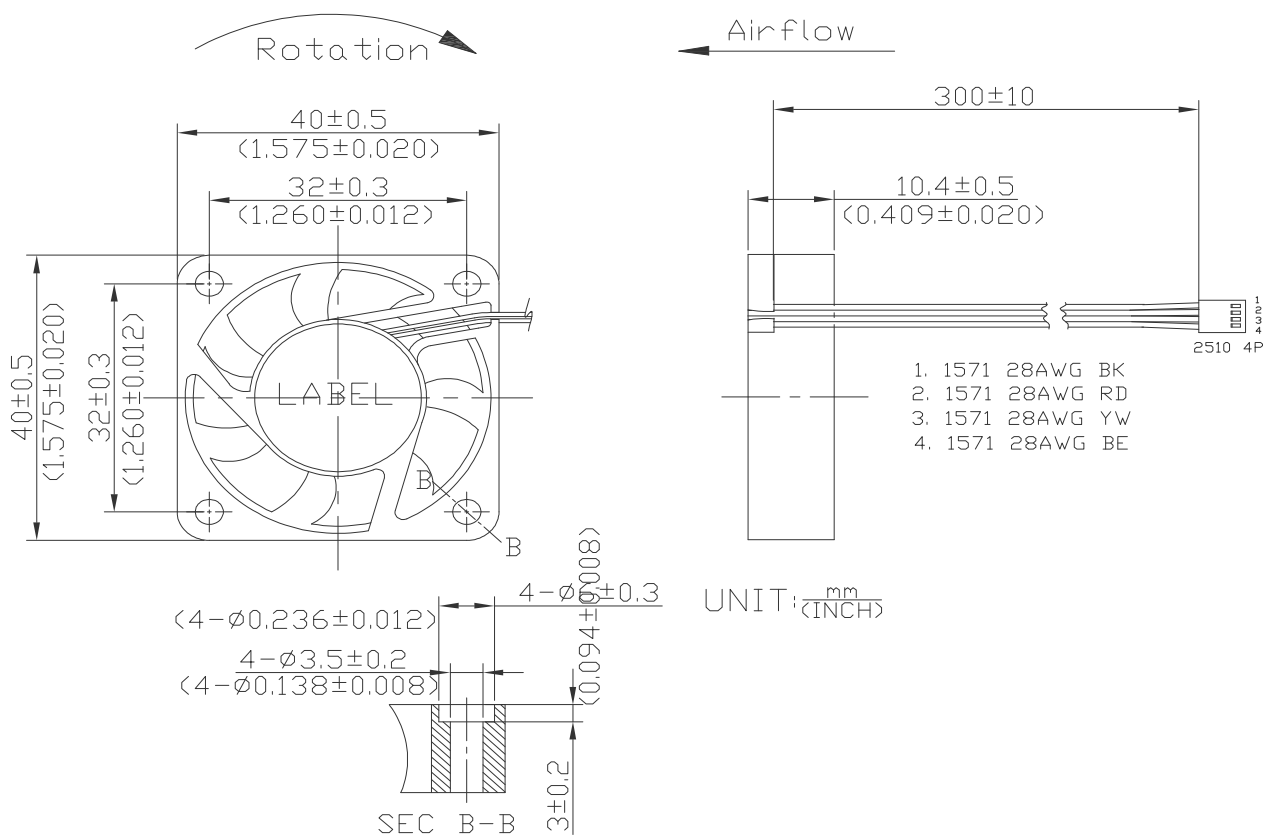

## VIII.PWM CONTROL SIGNAL:

Signal Voltage Range:-0.8-20VDC.

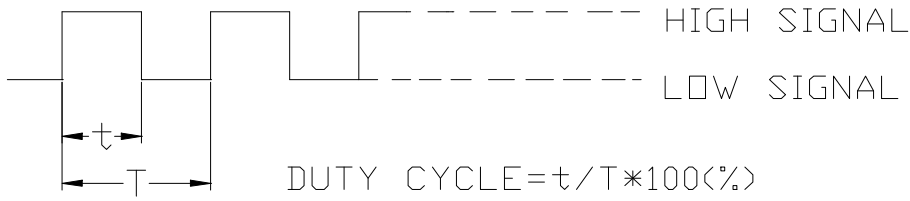

The frequency for control signal of the fan shall be able to accept a 18KHZ-32KHZ.

The preferred operating point for the fan is 25k HZ.

At 100% duty cycle ,The rotor will spin at maximum speed.

At 0% duty cycle , The rotor will spin at minimum speed.

The motor speed at different duty cycle is shown in the table below.

### SPEED VS PWM CONTROL SIGNAL:


(AT RATED VOLTAGE & PWM FREQUENCY=25KHZ)

DUTY CYCLE(%)	SPEED.PWM(REF)	CURRENT(A)TYP
100	5500±10%	0.08
75	4300±10%	0.06
50	3500±15%	0.04
25	2500±20%	0.02
0	2000±25%	0.02

# IX. Sensor Curcuit System

## PWM CONTROL

In PWM speed control, a fixed frequency square wave is applied to the speed control lead wire of the fan. The ratio of the on time vs. the PWM period is proportional to the RPM.

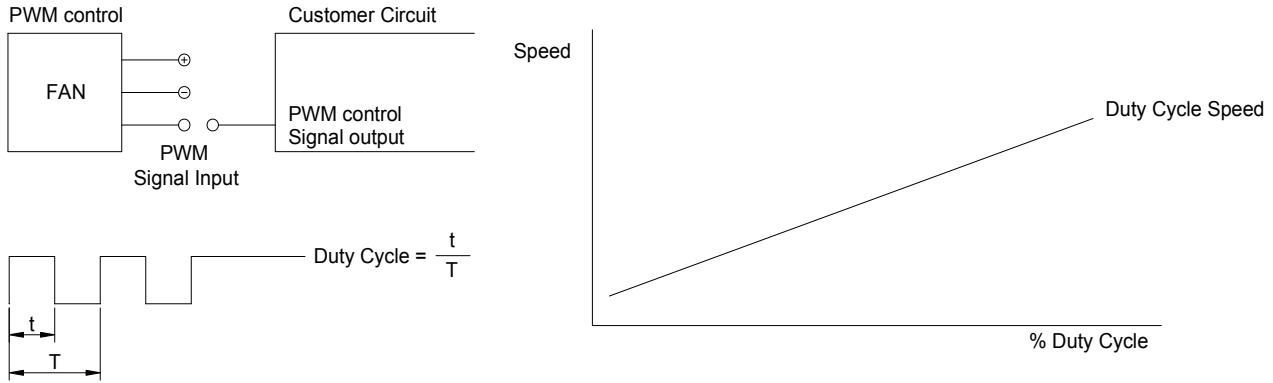

### PWM INPUT VOLTAGE RANGE:

High level= 2.8 to 20 VDC  
 Low level= 0 to 0.4 VDC


### PWM INPUT CURRENT (IPWM) RANGE:

40uA to 20mA

To control signal line of the fan shall be able to accept a 30Hz to 30kHz.  
 The preferred operating point for the fan is 0%~100% of duty cycle.



# X. Fan Duty Cycle Vs RPM Curve

4010 duty cycle vs rpm curve  
 PWM

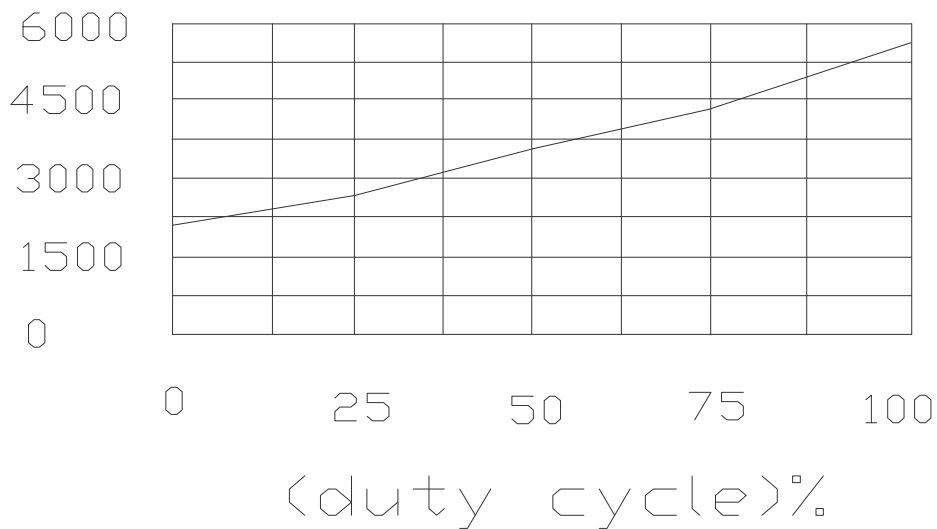


# VIII. Sensor Circuit System

Speed Sensor / Tachometer ( FG/F )

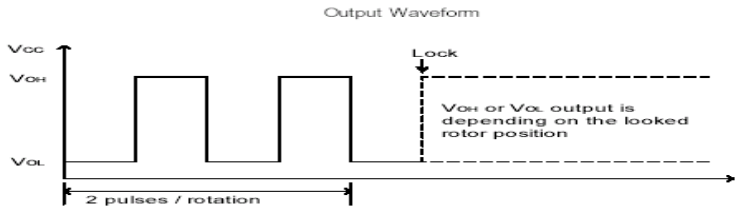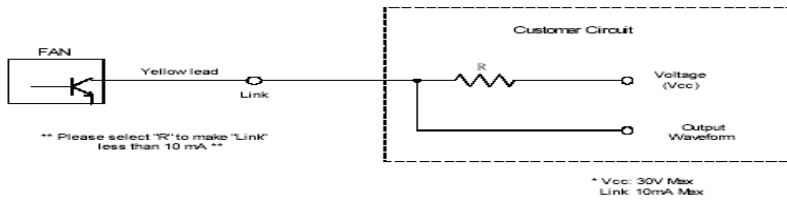

# IX. P/Q Performance

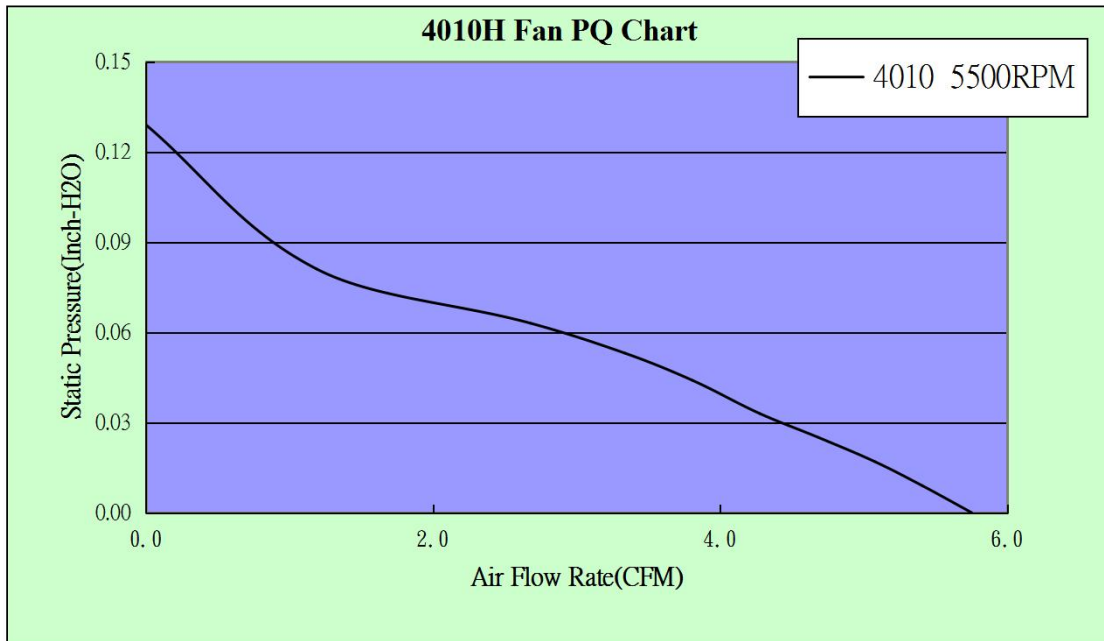

	Q(cfm)	Ps(InchH2o)
1	0.000	0.129
2	1.191	0.081
3	2.680	0.063
4	3.340	0.053
5	3.808	0.044
6	4.275	0.033
7	4.686	0.025
8	5.077	0.017
9	5.408	0.009
10	5.753	0.000