



REV	CONTENT	CHK	DATE
V0.0	CONTENT	CXL	21.01.12

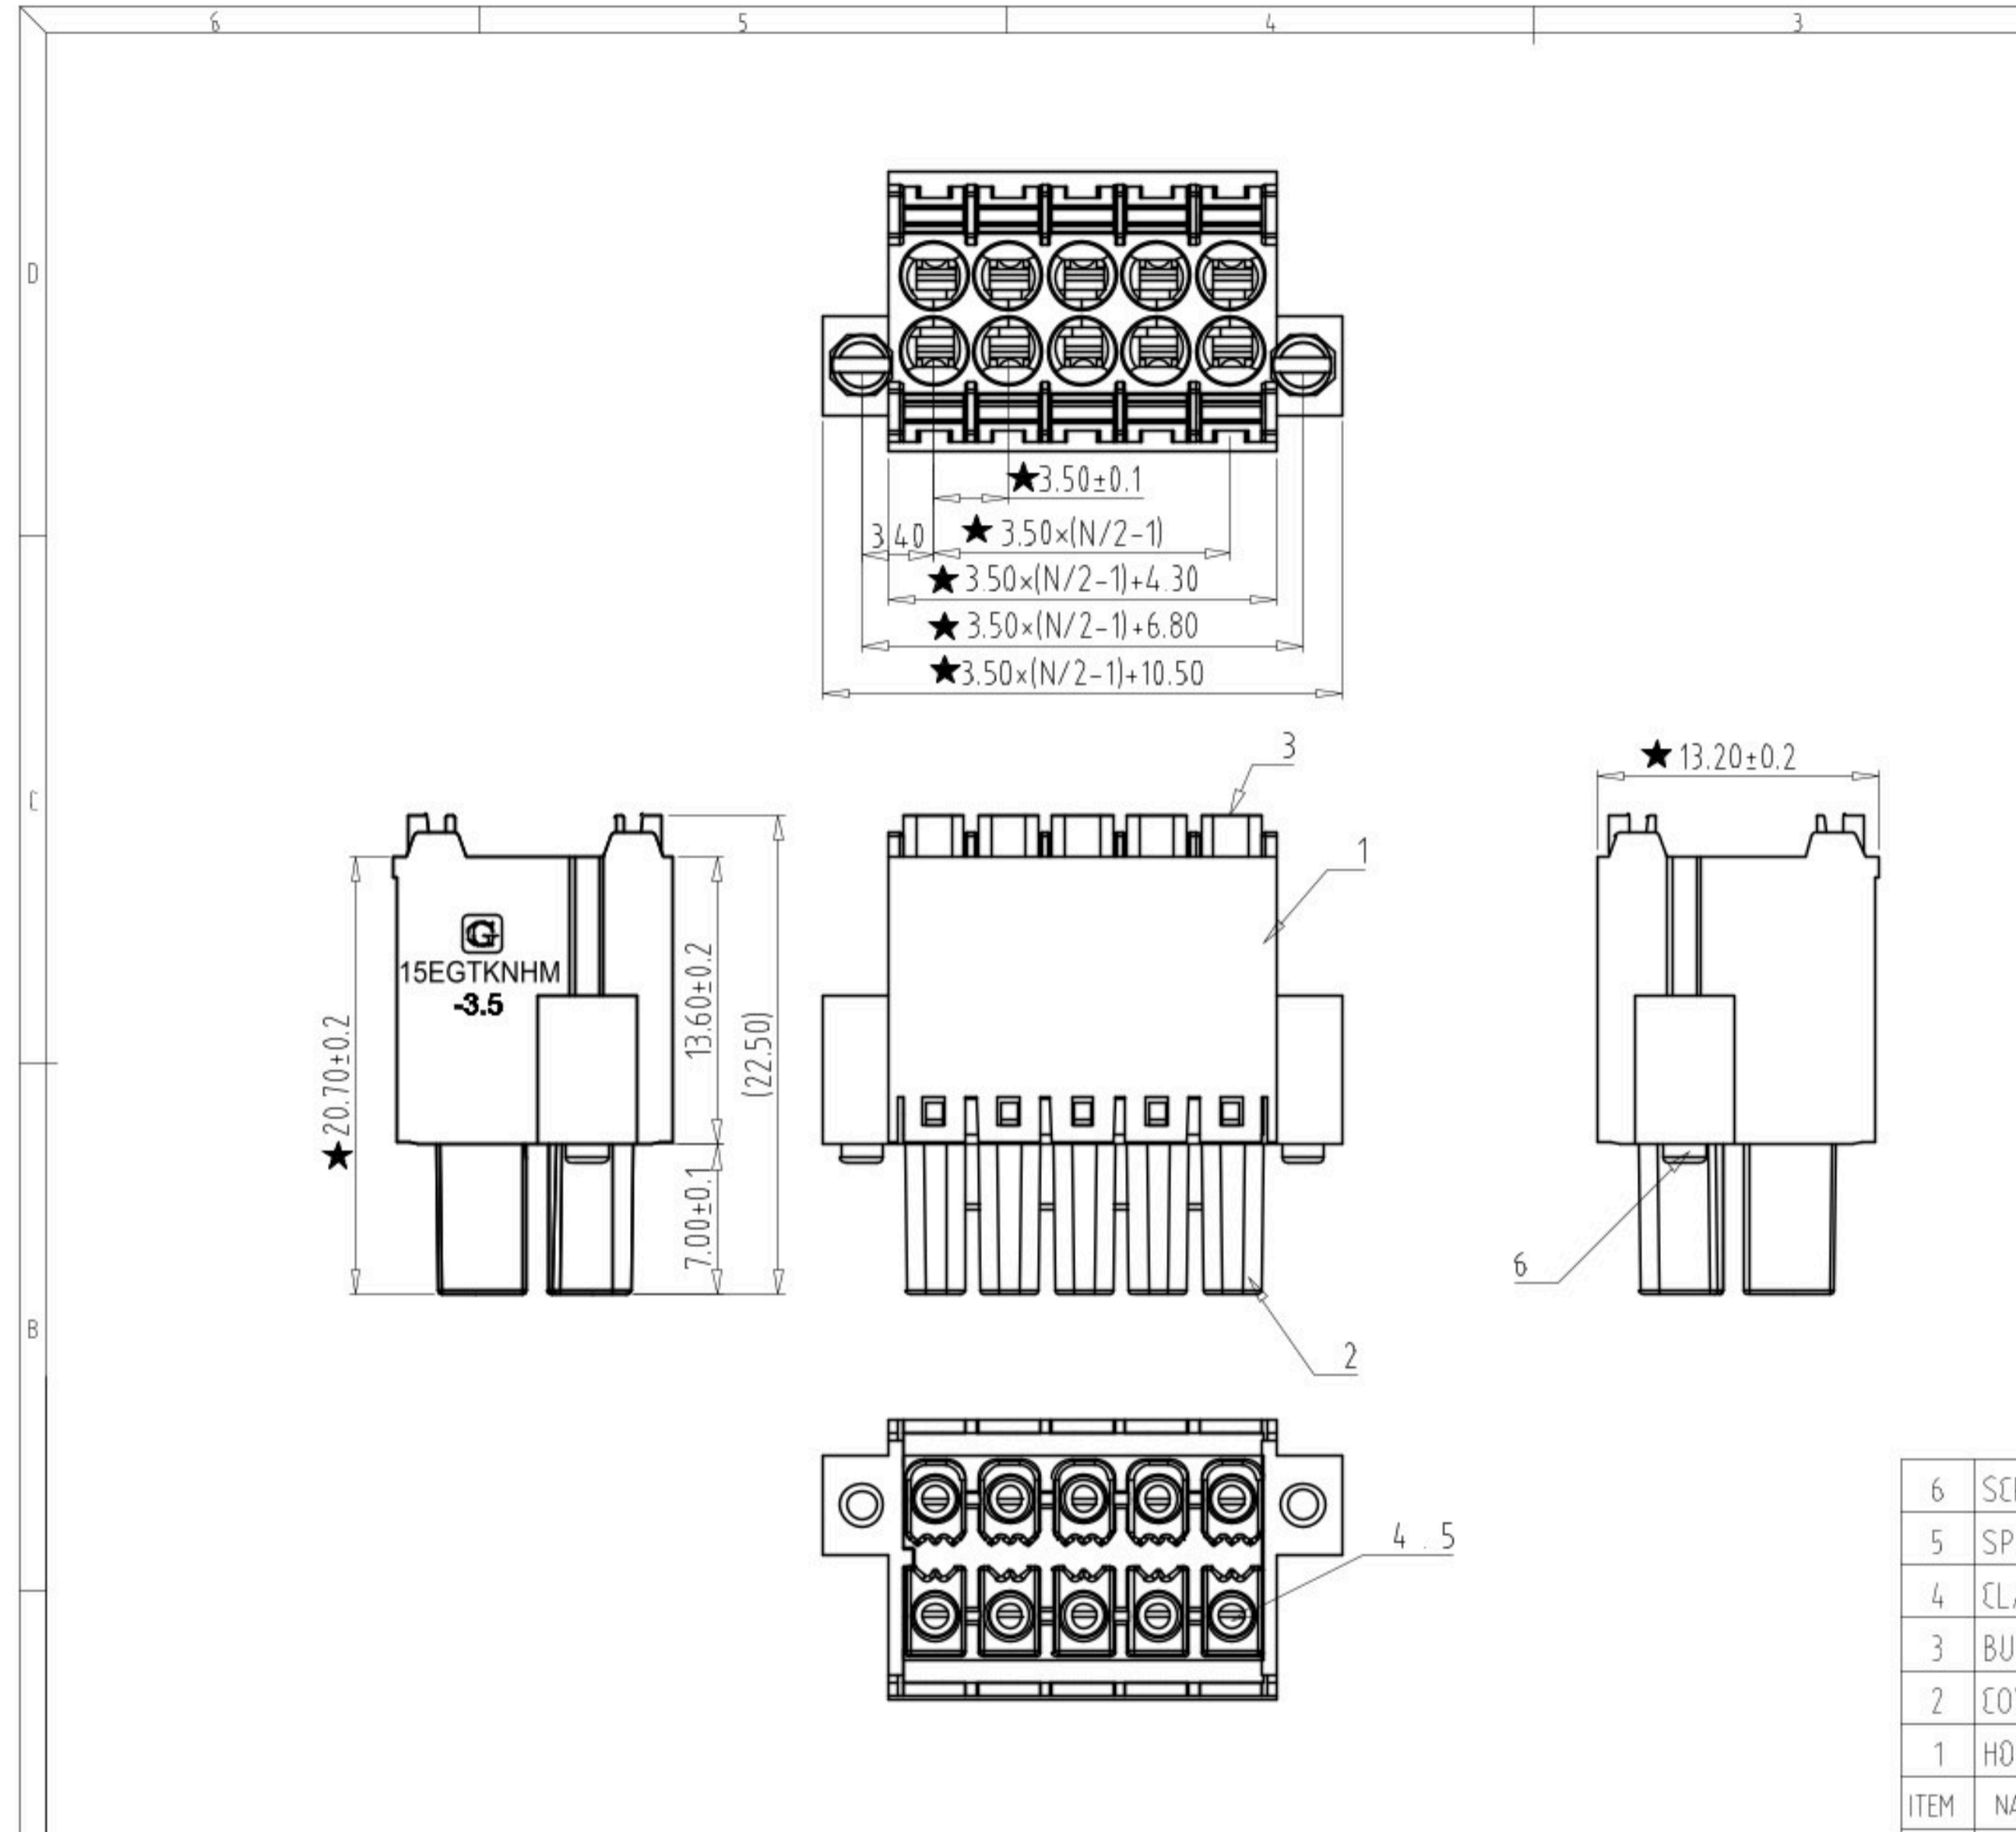

**Electrical :**

- |   |               |                        |
|---|---------------|------------------------|
|   | UL            | IEC                    |
| 1. Rated Voltage :                      | 150V          | 160V                   |
| 2. Rated Current :                      | 8A            | 8A                     |
| 3. Wire Range:                          | 24-16AWG      | 0.2-1.5mm <sup>2</sup> |
| 4. Stripping Length :                   | 9-10mm        |                        |
| 5. Withstanding Voltage :               | AC1600V/1Min. |                        |
| 6. Operating Temperature :              | -40°C~+105°C  |                        |
| 7. RoHS Compliance                      |               |                        |
| 8. "★" is the key quality control point |               |                        |

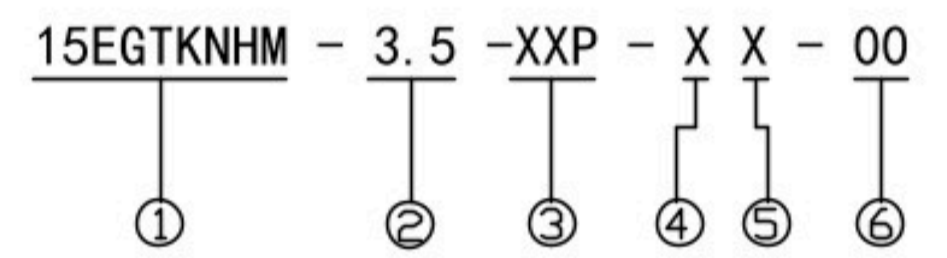

- ① Series NO.
- ② Pitch
- ③ Poles  
02 02Contacts  
03 03Contacts  
...  
24 24Contacts
- ④ 1 Single Pitch  
2 Double Pitch
- ⑤ Color: 1 Grey  
2 Blue  
3 Black  
4 Green  
5 Orange  
6 Red  
7 Transparent  
8 Yellow  
9 White
- ⑥ Customer Request: 00--Standard

6	SCREW	XX	2	STEEL	Zn Plated
5	SPRING	XX	P	STAINLESS STEEL	/
4	CLAMP	XX	P	COPPER ALLDY	Tin Plated
3	BUTTON	XX	P	POM UL94-HB	SEE NOTE
2	COVER	XX	1	PA66 UL94V-0	SEE NOTE
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥	=	-	//									
0	30	53	70	90	115	150	250	350	500	0	30	53	70	90	115	150	200	250	320	0	over	0	over	0	over	100	over	150				
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5									

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CXL	DATE	21.01.12	SIZE	A4 UNITS mm SHEET/OF 1/1
CHK	DATE			SCALE	1:1
APP.	DATE			NAME	15EGTKNHM-3.5-XXP-XX-00
				DWGNO.	XXXX

**Golten** 宁波冠泰电子有限公司  
NINGBO GOLTEN ELECTRONICS CO., LTD.