



# TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,  
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: [tstsales@mail.taisaw.com](mailto:tstsales@mail.taisaw.com) Web: [www.taisaw.com](http://www.taisaw.com)

## Product Specifications Approval Sheet

Product Name: SAW Filter 2155 MHz SMD 3.0X3.0 mm

TST Parts No.: TA2043A

Customer Parts No.: \_\_\_\_\_

Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: \_\_\_\_\_ Sam Lin *Sam Lin*

Approval by: \_\_\_\_\_ Bob Chau *Bob Chau*

Date: \_\_\_\_\_ 2017/02/09

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes



# TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,  
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: [tstsales@mail.taisaw.com](mailto:tstsales@mail.taisaw.com) Web: [www.taisaw.com](http://www.taisaw.com)


## SAW Filter 2155 MHz

MODEL NO.:TA2043A

REV. NO.:1.0

### A. MAXIMUM RATING:

1. Input Power Level: 10 dB<sub>m</sub>
2. DC voltage: 3 V
3. Operating Temperature: : -20°C to +70°C
4. Storage Temperature: -40°C to +85°C




Electrostatic Sensitive Device

### B. ELECTRICAL CHARACTERISTICS:


Item	Unit	Min.	Typ.	Max.
Center Frequency	MHz	-	2155	-
Insertion loss (2110 ~ 2200 MHz)	dB	-	2.7	5.0
Amplitude ripple (2110 ~ 2200 MHz)	dB	-	1.8	3.0
VSWR (2110 ~ 2200 MHz)	dB	-	1.8	2.5
<b>Attenuation (Reference level from 0 dB)</b>				
10 ~ 2060 MHz	dB	25	26	-
2250 ~ 3200 MHz	dB	25	33	-
Temperature Coefficient of Frequency	ppm/k	-	-36	-

### C. MEASUREMENT CIRCUIT:

HP Network analyzer

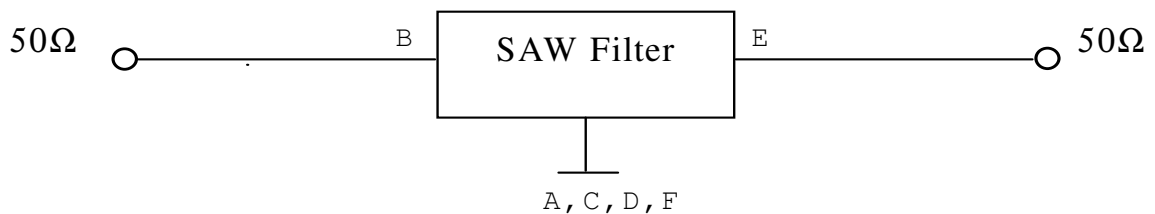

**D.OUTLINE DRAWING:**

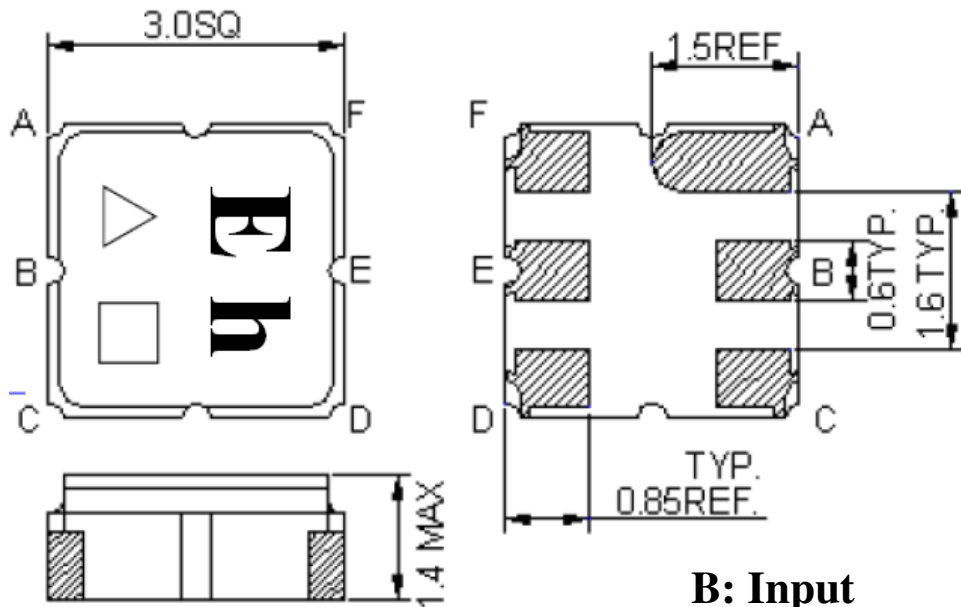

**B: Input**  
**E: Output**  
**A, C, D, F: Ground**  
**Unit: mm**

△ : Year Code (2009->9, 2010->0,..., 2018->8)

□ : Date Code (Follow the table from planner each year)


WK01	WK02	WK03	WK04	WK05	WK06	WK07	WK08	WK09	WK10	WK11	WK12	WK13
A	B	C	D	E	F	G	H	I	J	K	L	M
WK14	WK15	WK16	WK17	WK18	WK19	WK20	WK21	WK22	WK23	WK24	WK25	WK26
N	O	P	Q	R	S	T	U	V	W	X	Y	Z
WK27	WK28	WK29	WK30	WK31	WK32	WK33	WK34	WK35	WK36	WK37	WK38	WK39
a	b	c	d	e	f	g	h	i	j	k	l	m
WK40	WK41	WK42	WK43	WK44	WK45	WK46	WK47	WK48	WK49	WK50	WK51	WK52
n	o	p	q	r	s	t	u	v	w	x	y	z

## E. Frequency Characteristics :


### Span 800 MHz



### Span 4500 MHz

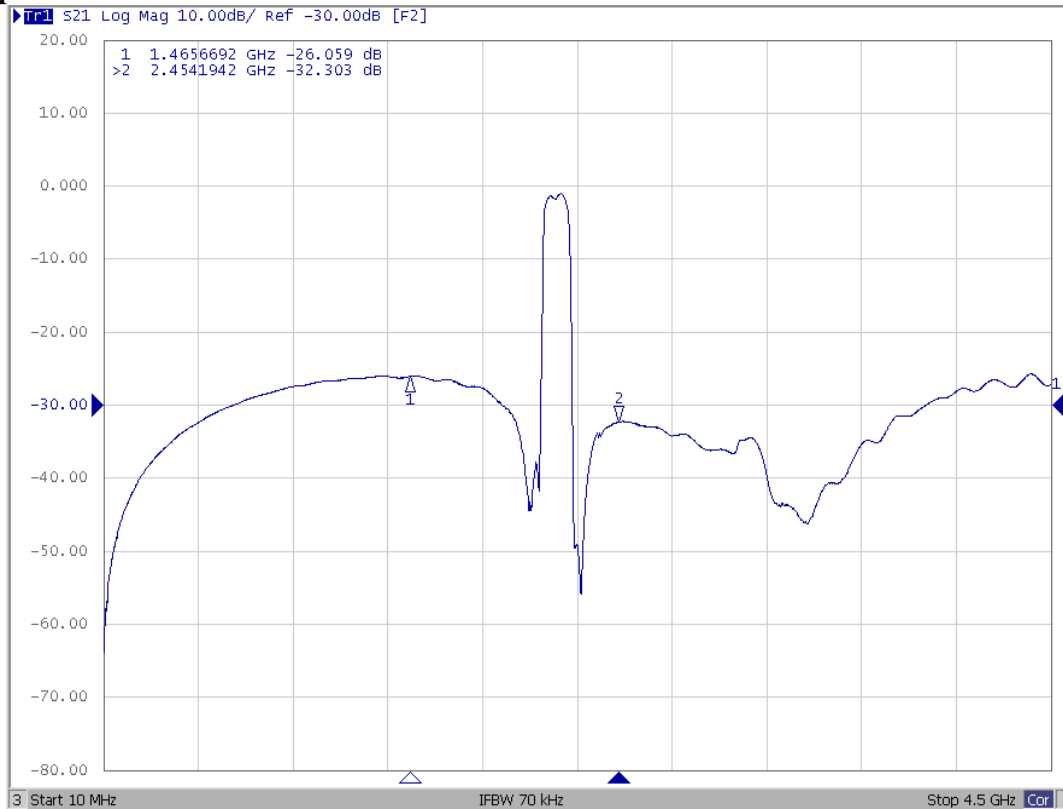

## Span 180 MHz

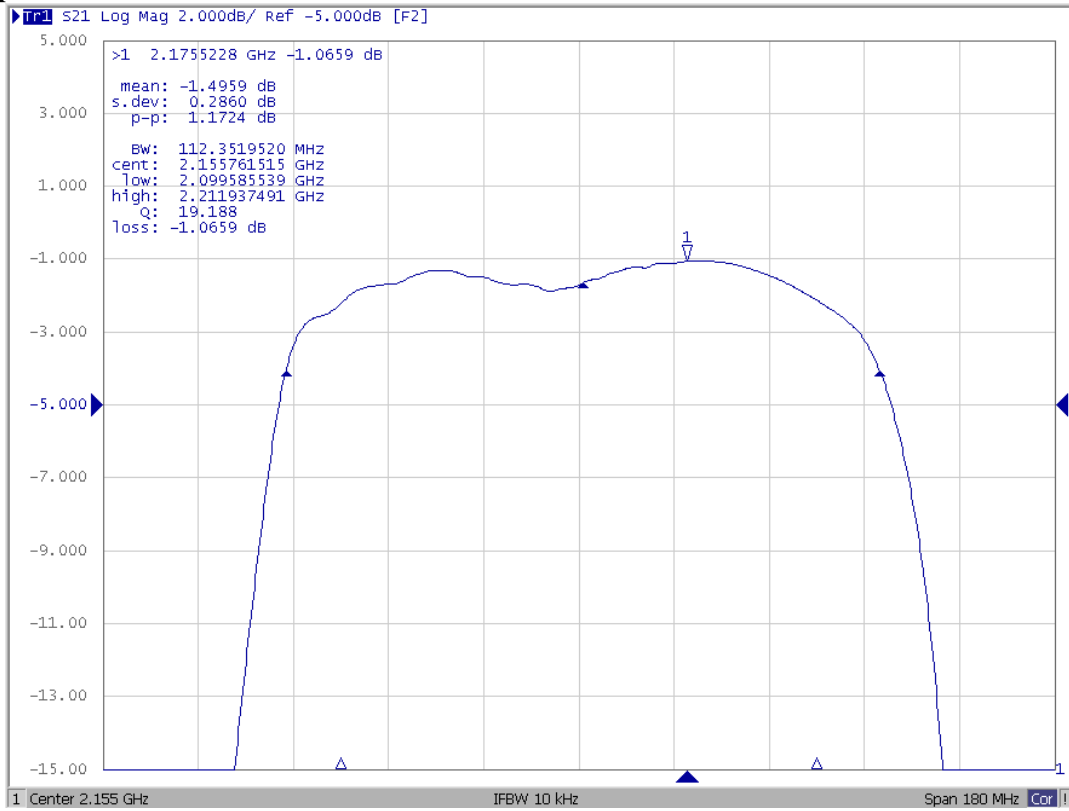

## Return Loss (Span 180 MHz)

