



MECHANICAL DIMENSION:(UNIT:mm)

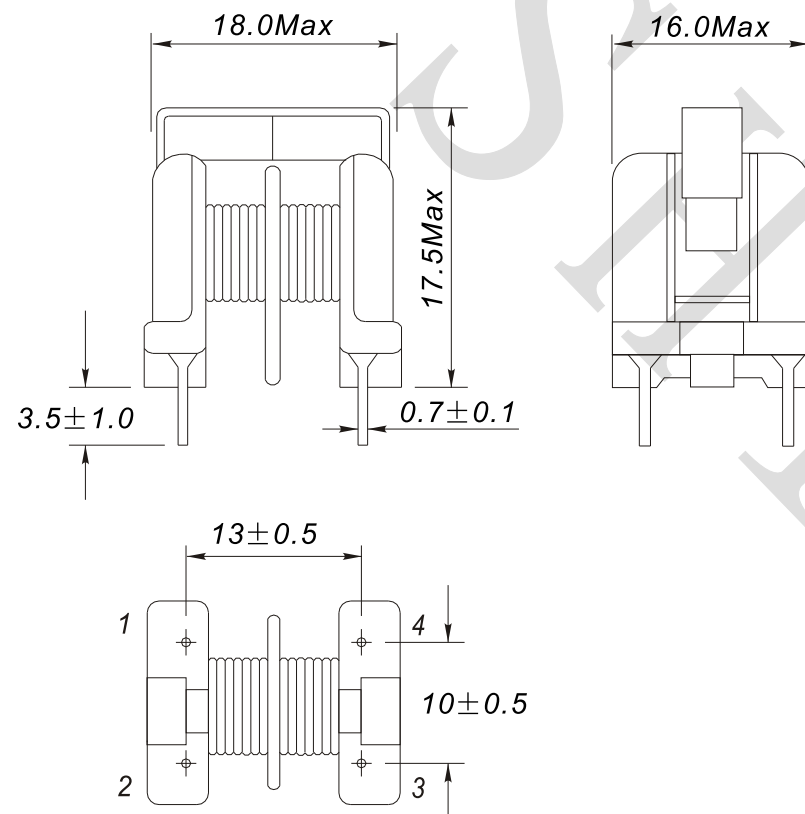

SCHEMATIC:



Rev.	Description	Date
A0	New release	2017.10.14

WINDING:

WDG	TERMINAL	WIRE SIZE	TURNS	NTES
N1	1-2	φ 0.6MM*1P	24TS(RFF)	
N2	4-3	φ 0.6MM*1P	24TS(RFF)	

ELECTRICAL CHARACTER:

NO.	ITEM	MEASURED POINT	TECHNICAL DATA	TEST CONDITION & INSTRUMENT
1	INDUCTANCE	L 1-2=4-3	1.5mH min	1kHz 0.25V
2	DCR	L 1-2=4-3	0.054Ω MAX	1kHz 1V
3	HI-POT	PRI TO SEC	AC 1800V 5mA 1MIN	epe 7112

Ambient temperature: -25℃ to +85℃

MATERIAL LIST:

NO.	ITEM	MATERIALS	RATING	FILE NO	SUPPLIERS
1	BOBBIN	PHENOLIC T375J	130℃	E59481(S)	CHANGCHUN PLASTICS CO.,LTD
		UL RATING:94V-0			
2	CORE UU-10.5L	R10K	N/A	N/A	TDG
		H5C2	N/A	N/A	TDK
3	WIRE	φ 0.6mm	130℃	E84081	PACIFIC ELECTRIC WIRE&CABLE CO.LTD
4	VARNISH	T4260A MW28	130℃	E228349	WU JIANG TAIHU INSULATING MATERIAL CO LTD
5	SPRING	SUS301	N/A	N/A	CHANGSHUN

NAME:	Common mode chokes		
CUSTOMER P/N:	PLA10AN1522R0R2	DATE:	2017-10-14
SHINHOM P/N:	LF1917-152Y-2A	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	



SHINHOM
SHAANXISHINHOM ENTERPRISE CO LTD

TEL:+86-029-87851838
FAX:+86-029-87851840
ZIP:710054
Http://www.shinhom.com
E-mail:shinhom@global-sources.com
sales@shinhom.com.cn
NO. 8, Yanta Northern Road, Xi'an Shaanxi Pro. China