

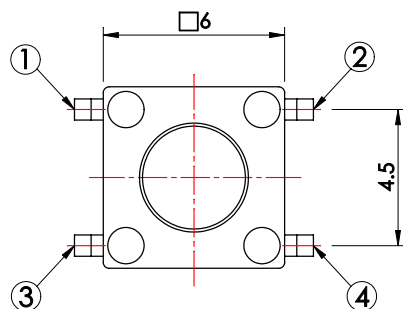
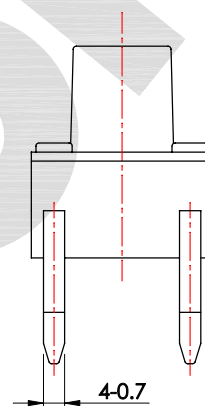


本圖面若與目錄之規格尺寸不符，以本圖面規格尺寸為主。
Below is our main specification if different from catalog.


RoHS compliant

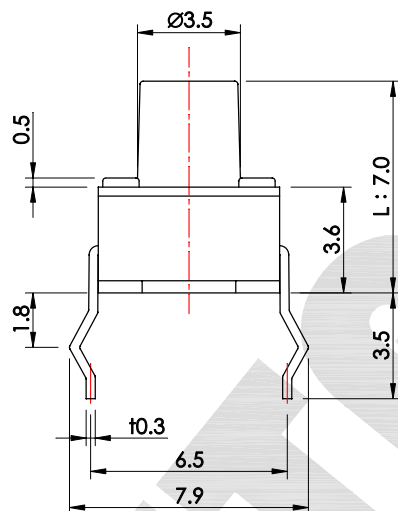

CIRCUIT DIAGRAM



P.C.B. LAND PATTERN

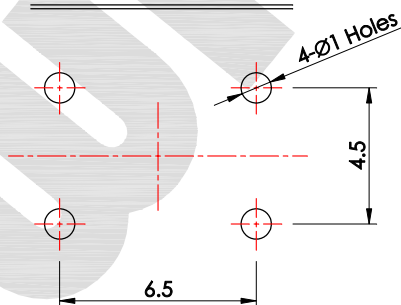

RoHS compliant

06XXHIM-XXXG-G

MODEL NO.	L
70	7.0
80	8.0
95	9.5

OPERATING FORCE
100, 130, 160, 250

SPECIFICATION

Rating: 50mA 12V DC Max.

Circuit: SPST.

Function: OFF-(ON).

Travel: 0.25±0.15mm.

Contact resistance: 100mΩ Max.(initial)

Operating force: 130±50g.

Minimum load: 10mA 3.3V DC.(reference only)

Life: 100,000 Cycles Min.

Soldering temperature: 250°C Max. for 3 sec.

Soldering time: 1 time only.

Note: Unwashable, don't be immersed by epoxy and organic solvent.



CV3.1	△		
CV3.0	無	新繪製	2010.02.01
版本 VER.	符號 SYMBOL	修改內容 ALTERATION	更新日期 DATE

產品 PRODUCT		Tact Switch		型號 MODEL NO.		0670HIM-130G-G	
比例 SCALE	4 : 1	單位 UNIT	mm	一綺電子企業股份有限公司 總公司：110 台北市信義路四段415號13樓之3 13F-3 NO. 415, SEC. 4, HSIN YI ROAD, TAIPEI, TAIWAN TEL：886-2-27290229(Rep.) FAX：886-2-27582086 URL：http://www.switronic.com.tw E-MAIL：switches@ms36.hinet.net			
公差 TOLERANCE	±0.3mm						
製圖 DRAWN BY	核圖 CHECKED BY	主管 APPROVED BY					
Jack Liao	Alex Lin	Margaret Lee					