
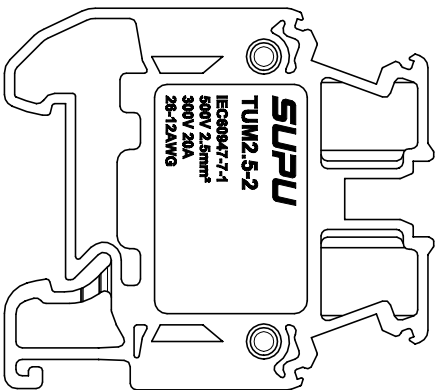
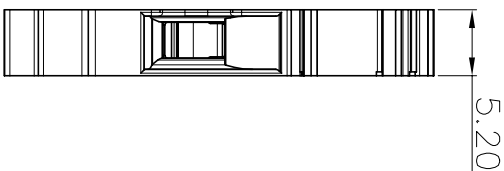


Nominal Dimension Range In mm						—	□
Over	Over	Over	Over	Over	Over	0.1/10	
10	30	50	80	120	180		
TO	TO	TO	TO	TO	TO		
10	30	50	80	120	180		
TO	TO	TO	TO	TO	TO	≤	
10	30	50	80	120	180		
TO	TO	TO	TO	TO	TO		
10	30	50	80	120	180		
±0.18±0.26±0.35±0.50±0.70±0.90±1.00±1.20						±2°	

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited.

未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

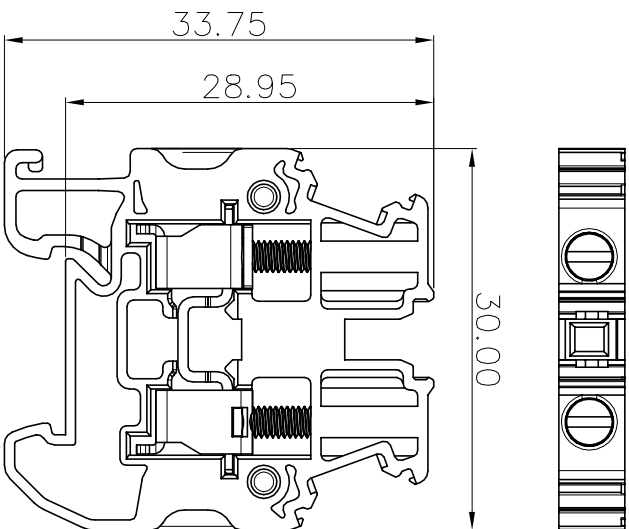

技术要求/Technical requirements

UL电气参数/UL Electrical parameter:

应用组别/Use group额定电压/Nominal voltage(V)

额定电流/Nominal current(A)

工频耐压/Withstanding voltage(V)

IEC 电气参数 / IEC Electric parameter:过压类别/Overvoltage category污染等级/Pollution degree

额定脉冲电压/Rated impulse voltage(

额定电压/Nominal voltage(V)

额定电流/Nominal current(A)

基础数据/Basic data:

间距/Pitch(mm) & 线数范围/Poles

线径范围/Wire range(AWG/mm²)

[illegible]

带绝缘管套冷压头/

will female, will plastic sleeve ()

刺線及び/或はipping 縫製(111111)

HOW TO ORDER:

TUM2.5-2-XX

Serie
No.

Color:

GY: Grey RD: Red

BU:Blue

OG: Orange
PK: Pink

Dr. Dick
Yl. Yellom

GN: Green

RD: Red
WG: White Gray

4	螺钉/ Screw	Steel	M2.5/ Zn plated
3	压线框/ Cage	Steel	M2.5/ Zn plated
2	导电带/ Conductor	Copper Alloy	Sn plated
1	塑件/ Housing	PA66	UL94 V-0
ITEM	NAME OF PART	MATERIAL	NOTES

订货号 Order No.	TUM2.5-2-XX		名称 Name	TU系列2.5mm²铁螺 钉一进一出微型 接线端子		未注公差 Tolerance	表面 Surface
项目 Item	签字 Signature	日期 Date	图号 Drawing No.	PM00	版本号 Revision Number	重量 Weight	比例 Scale
设计 Design	cjs	2026.01.31	材料 Material	见NOTES	To-1	1:1	
审核 Check	lxw	2026.01.31	物料号 Item No.	411505001 (GY)	第1页/共1页 1 of 1		mm
工艺 Process	-	-		411505002 (BU)			
标准化 Unity	-	-		411505003 (OG)			
批准 Approve	ww	2026.01.31					